

# IT'S ALL About About About System





# **CONTACT HEADQUARTERS GERMANY**



laad of Salas m.massaro@vosschemie.de +49 (0) 41 22 / 717-205



Martin Schuster Sales Manager Europe m.schuster@vosschemie.de +49 (0) 172 / 408 94 80







BRILLIANT SYSTEM

CARSYSTEM IS THE FIRST ADDRESS FOR ALL PRODUCTS AROUND THE BODY- AND PAINT REPAIR IN THE AUTOMOTIVE RANGE.

62 partners, 64 countries, more than 2,000 products – global demand has made us one of the leading suppliers of non-paint products for the automotive repair industry. This pole-position is the result of the uncompromising to quality and the consequence of more than 60 years of experience in the market.

As a trademark of VOSSCHEMIE, based in Uetersen near Hamburg / Germany, we benefit from decades of development and production of polyester fillers. Around these core competences we have constantly expanded our product range. Meanwhile we have everything on hand what you need for a competent and professional automotive body repair.


Good if everything comes from one source. Better when all products are precisely verified on each other. The best if certified quality secures constant standards (certified to DIN EN ISO 9001:2015).

This successful system has a name: CARSYSTEM




# OUR **NEWS** AT A GLANCE. \* and many more

NEW

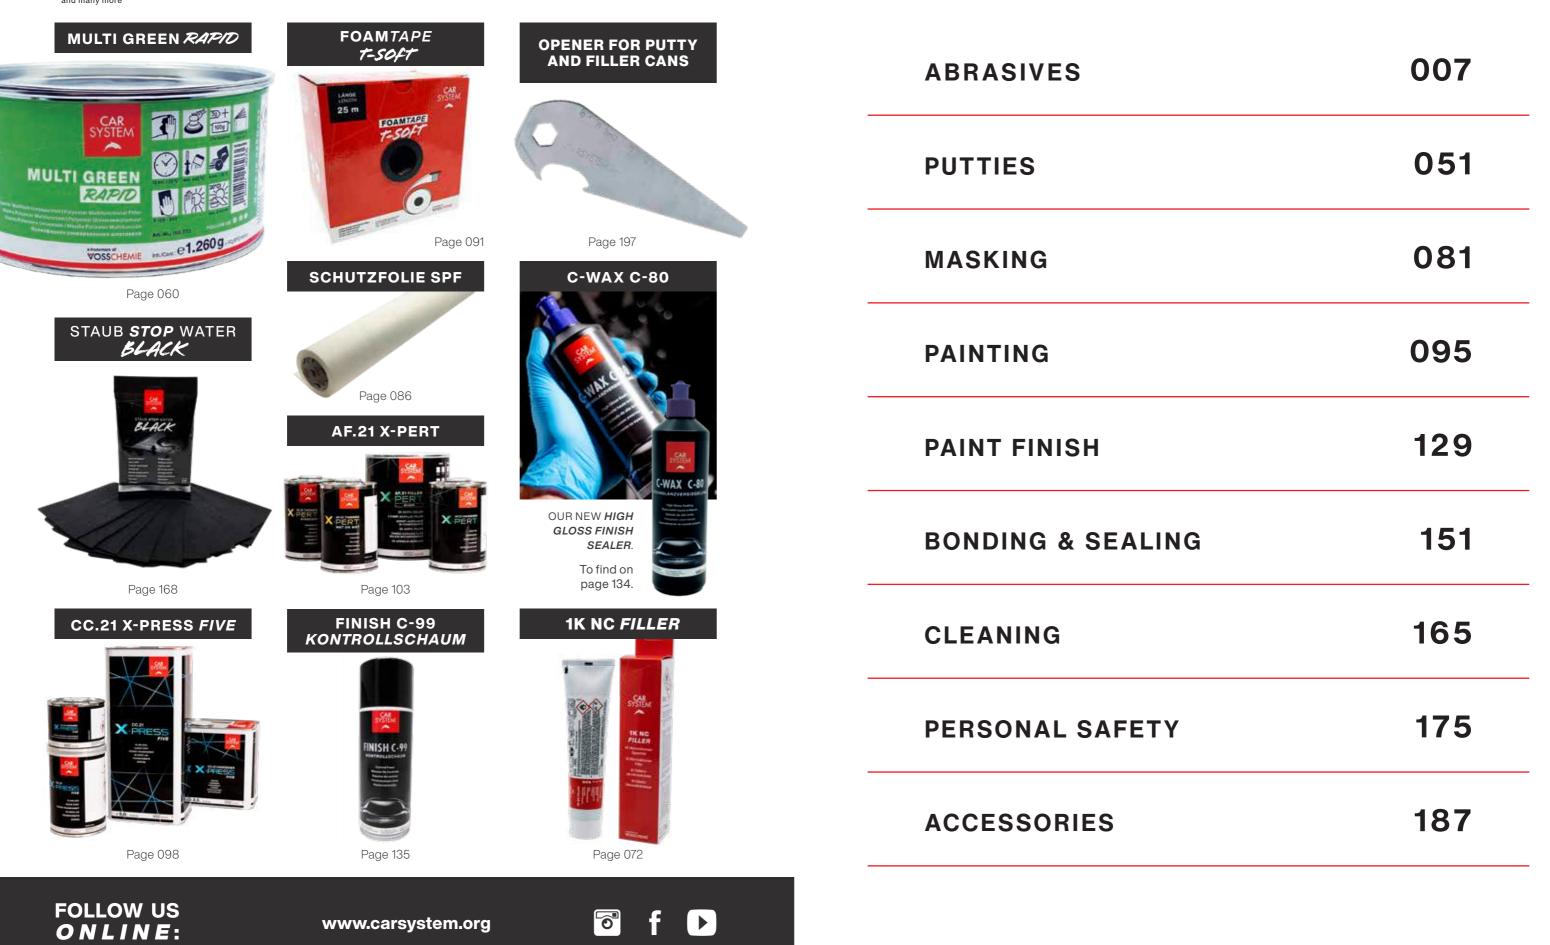




# MINI RANDOM ORBITAL SANDER ORBITAL SANDER SANDING BLOCK H2O SOFT F.19 TOP LINE BACK PAD **PROFLEX ABBRASSIVES** FINISH RUPES V.19 PREP & SCUFF P.19 DRY COAT PAD SANDING WATER TEC LINE INTERFACE PAD RANDOM ORBITAL SANDER SANDING BLOCKS

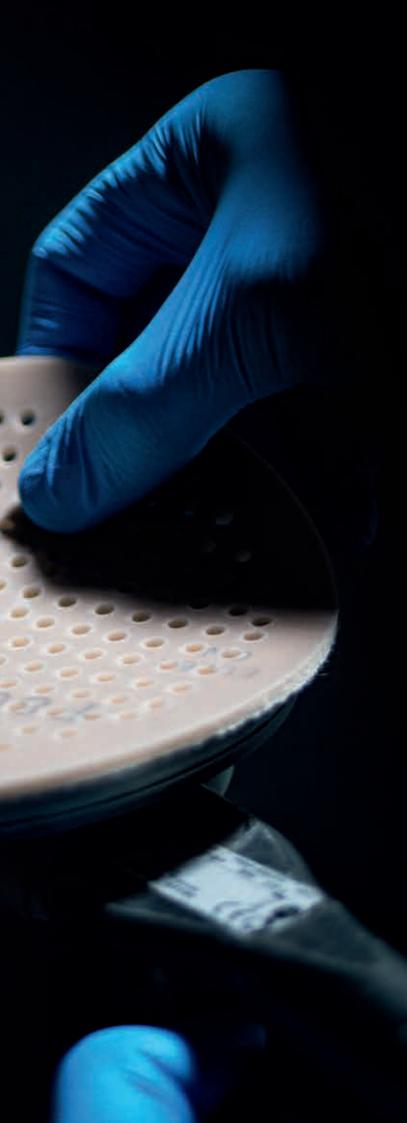



Sanding Disc P.19

Paper abrasive – 150 mm – 25 holes



# Description

Universal paper-sanding disc
 Carsystem hole pattern 25-holes and oval center hole
 Aluminium oxide grain

Area of application

Suitable for corse to fine sanding

# Sanding Strips P.19

Paper abrasive – 70 × 198 mm

Description Paper-based sanding stripsAluminium oxide grain

Area of application Suitable for corse to fine sanding

# Benefits

High cutting power

# High efficiency

Application advice

We recommend using a dust extraction system

ArtNo.	Specification	SP	MOQ
156.670	P 40	50	1000
156.671	P 60	50	1000
156.672	P 80	50	1000
156.673	P 120	50	1000
156.674	P 150	50	1000
156.675	P 180	50	1000
156.676	P 220	50	1000
156.677	P 240	50	1000
156.678	P 320	50	1000
156.679	P 400	50	1000

# Benefits

High cutting powerHigh efficiency

ArtNo.	Specification	SP	MOQ
156.357	P 40	50	500
156.358	P 60	50	500
156.359	P 80	50	500
156.361	P 120	50	500
156.362	P 150	50	500
156.363	P 180	50	500
156.364	P 220	50	500
156.365	P 240	50	500
156.367	P 320	50	500
156.368	P 360	50	500
156.369	P 400	50	500
156.370	P 500	50	500
156.371	P 600	50	500

Paper abrasive – 70 × 400 mm

# Description

- Paper-based sanding strips
   Aluminium oxide grain
- Area of application Suitable for corse to fine sanding

Benefits


High cutting powerHigh efficiency

# Application advice

We recommend using a dust extraction system

ArtNo.	Specification	SP	MOQ
156.680	P 40	50	500
156.681	P 60	50	500
156.682	P 80	50	500
156.683	P 120	50	500
156.684	P 150	50	500
156.685	P 180	50	500
156.686	P 220	50	500
156.687	P 240	50	500
156.688	P 320	50	500
156.689	P 400	50	500

Sanding Disc F.19 Film abrasive - 150 mm - 25 holes



Description

High performance film-based sanding disc
 Carsystem hole pattern 25-holes and oval center hole
 Aluminium oxide grain

# Sanding Disc F.19

Film abrasive - 77 mm



Description High performance film-based sanding disc Aluminium oxide grain

Area of application Suitable for corse to fine sanding



### Area of application

Suitable for corse to fine sanding

# Benefits

Extremely high and long lasting cutting power

Universal high performance sanding disc

ArtNo.	Specification	SP	MOQ
156.046	P 80	50	1000
156.048	P 120	50	1000
156.049	P 150	50	1000
156.050	P 180	50	1000
156.051	P 220	50	1000
156.052	P 240	50	1000
156.054	P 320	50	1000
156.055	P 360	50	1000
156.056	P 400	50	1000
156.057	P 500	50	1000
156.058	P 600	50	1000
156.059	P 800	50	1000

# Benefits

Extremely high and long lasting cutting power
 Universal high performance sanding disc

ArtNo.	Specification	SP	MOQ
156.647	P 80	50	1000
156.648	P 120	50	1000
156.649	P 150	50	1000
156.650	P 180	50	1000
156.651	P 220	50	1000
156.652	P 240	50	1000
156.653	P 320	50	1000
156.654	P 400	50	1000
156.655	P 500	50	1000
156.903	P 800	50	1000

# Sanding Disc F.19 Finish

Film abrasive – 152 mm – 15 holes



# Description

- High performance film-based sanding disc
- Special coating
   Carsystem hole pattern 15 holes and oval center hole
- Aluminium oxide grain

# Area of application

- = Blending = Matting of surfaces = Finish (Removing of imperfections)

# Benefits

- Extremely fast removing of surface structure and imperfections
   Special coating provides an extra fine and even sanding pattern
   Perfect levelling of the transition zone between new and old paint layers
   Reduces the reworking time in the finishing process

ArtNo.	Specification	SP	MOQ
156.899	P 1000	50	1000
156.900	P 1200	50	1000
156.901	P 1500	50	1000
156.902	P 2000	50	1000



Film abrasive – 77 mm



# Description

High performance film-based sanding disc
 Special coating
 Aluminium oxide grain

# Area of application

- Blending
  Matting of surfaces
  Finish (Removing of imperfections)

### Benefits


- Extremely fast removing of surface structure and imperfections
  Special coating provides an extra fine and even sanding pattern
  Perfect levelling of the transition zone between new and old paint layers
  Reduces the reworking time in the finishing process

ArtNo.	Specification	SP	MOQ
156.904	P 1500	50	1000
156.905	P 2000	50	1000



# Sanding Disc F.19 Soft

Film abrasive - 152 mm - Multi hole



# Description

- High performance film-based sanding disc with foam back
  Multi hole
  Aluminium oxide grain

# Area of application

- = Filler finish
- Blending
  Matting of surfaces

CARSYSTEM A PRODUCT CATALOGUE 2022

- Surface structure is sanded evenly
- Extremely high and long lasting cutting power
   Comfortable sanding due to the foam back

ArtNo.	Specification	SP	MOQ
156.933	P 320	30	600
156.934	P 400	30	600
156.935	P 500	30	600
156.936	P 600	30	600
156.937	P 800	30	600



**Tec Line** N20 Net sanding strips 70 × 400 mm



# Description

- Net sanding stripes
- Special coatingAluminium oxide grain

# Area of application

Suitable for every sanding application on bodyfillers from coarse to fine sanding

### Benefits

Due to the perforation of the individual stripes, the Tec Line N20 can be used on both 70 × 400 mm and 70 × 200 mm tools
Extremely dust-reduced sanding
The characteristic of the net provides a very long lifetime

ArtNo.	Specification	SP	MOQ
157.438	P 80	50	200
157.439	P 120	50	200
157.440	P 180	50	200
157.441	P 240	50	200
157.442	P 320	50	200
157.443	P 400	50	200

# **Tec Line Softflex**

Paper abrasive – Roll – 115 × 125 mm



### Description

Paper-based abrasive with foam back
 Roll with tear-off perforation
 200 tear-offs / box

Area of application

Manual sanding of curves and hard-to-reach areas
 Suitable from coarse to fine sanding

# **Tec Line Pro Finish**

Net abrasive – 150 mm



# Description

Net abrasive disc with a Velcro<sup>®</sup> foam back

# Area of application

- Perfect for blending
  Matting of surfaces
  Finish
  Wet use (recommended)

# Benefits

Flexibility due to the foam back

ArtNo.	Specification	SP	MOQ
152.689	P 150	1	5
152.690	P 180	1	5
152.691	P 240	1	5
152.692	P 320	1	5
152.693	P 400	1	5
152.694	P 500	1	5
152.695	P 600	1	5
152.696	P 800	1	5

### Benefits

Extremely good dust extraction in dry use
Almost dust-free sanding
Perfect water transportation in wet use
Extremely fine and even sanding pattern

ArtNo.	Specification	SP	MOQ
152.983	P 1000	20	120
152.984	P 2000	20	120
153.256	P 3000	20	120

# PRODUCTCATALOGUE 2022 | CARSYSTEM

# Abrasives

# **Topline WP S**

Paper abrasive – 230 × 280 mm



# Description

- Wet sanding paper
- Silicon carbide grain
   Flexible latex reinforced A-paper P80 P180
- Smooth latex reinforced C-paper P220 P2000

## Area of application

Wet sanding of filler coated or painted surfaces


### Benefits

Very high cutting power due to the silicon carbide grain
 Highest flexibility after short soaking time due to the high quality latex reinforced paper

ArtNo.	Specification	SP	MOQ
136.676	P 80	50	500
136.677	P 120	50	500
136.678	P 180	50	500
136.679	P 220	100	1000
136.680	P 240	100	1000
136.681	P 280	100	1000
136.682	P 320	100	1000
136.683	P 360	100	1000
136.684	P 400	100	1000
136.685	P 500	100	1000
136.686	P 600	100	1000
136.687	P 800	100	1000
136.688	P 1000	100	1000
136.689	P 1200	100	1000
136.690	P 1500	100	1000
136.691	P 2000	100	1000

# **Classicline Soft Pad**

Foam abrasive - 140 × 115 mm

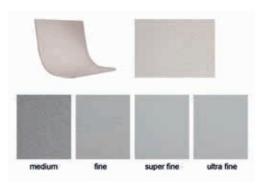

### Description

Soft pad with foam backAluminium oxide grain

# Area of application

- Matting and sanding of hard-to-reach areas, smallest corners,
- Folds and dimples prior to filler or paint application Medium and fine: prior to filler application
- Super fine and ultra fine: prior to paint application

# Topline WP A

Paper abrasive – 230 × 280 mm



### Description Wet sanding paper

Aluminium oxide grain
 Flexible latex reinforced A-paper

# Area of application

Wet sanding of painted surfaces


# Benefits

Very fine and even sanding pattern Long lifetime

ArtNo.	Specification	SP	MOQ
136.671	P 600	100	1000
136.672	P 800	100	1000
136.674	P 1200	100	1000

# **Topline Soft Pad**

Foam abrasive – 140 × 115 mm

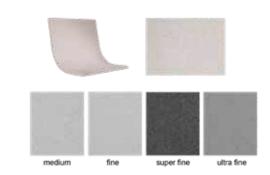

# Description

Soft pad with foam backAluminium oxide grain

### Area of application

- Matting and sanding of hard-to-reach areas, smallest corners, folds and dimples prior to filler or paint application
   Medium: prior to filler application
   Fine and ultra fine: prior to paint application

# h

# Benefits

Very flexible

Perfect adaption on every curve
For wet or dry use

ArtNo.	Specification	SP	MOQ
138.924	medium / P 220 - P 280	40	40
138.925	fine / P 320 - P 400	40	40
138.926	super fine / P 400 - P 500	40	40
138.927	ultra fine / P 800 – P 1200	40	40

Benefits

Very fine sanding pattern

Very flexible
Perfect adaption on every curve

For wet or dry use

ArtNo.	Specification	SP	MOQ
126.251	medium / P 220 - P 280	40	40
126.252	fine / P 400 - P 500	40	40
126.253	super fine / P 600 - P 800	40	40
126.254	ultra fine / P 1000 – 1200	40	40

# Sanding Fleece V.19

Sanding Fleece pad – 115 × 230 mm



# Description

Sanding fleece with three dimensional structure
 The synthetic resin soaks through the fleece and distributes the sanding grain all over

# Area of application

- Matting of corners, roundings or sharp edges
- prior to filler or paint application Red very fine: prior to filler application
- Grey ultra fine: prior to paint application

Benefits

High cutting powerSuitable for wet and dry sanding

### Application advice

Perfectly suitable with the Carsystem matting pastes

ArtNo.	Specification	SP	MOQ
156.041	very fine / red	25	200
156.042	ultra fine / grey	25	200

Sanding Fleece V.19 Sanding Fleece – Roll – 115 mm × 10 m



### Description

Sanding Fleece with three dimensional structure The synthetic resin soaks through the fiber mat and distributes the sanding grain all over

# Area of application

- Matting of corners, roundings or sharp edges prior to filler or paint application
   Red very fine: prior to filler application
   Grey ultra fine: prior to paint application

# Sanding Fleece V.19

Sanding Fleece - Disc



# Description

- Sanding fleece with three dimensional structure The synthetic resin soaks through the fleece and distributes the sanding grain all over

# Area of application

- Matting and dust removal on large surfaces by machine
   Red very fine: prior to filler application
   Grey ultra fine: prior to paint application

- High cutting power
  Suitable for wet and dry sanding
  On a roll for easy cut off in the needed lenght

# Application advice

Perfectly suitable with the Carsystem matting pastes

ArtNo.	Specification	SP	MOQ
156.039	very fine / red	1	10
156.040	ultra fine / grey	1	10

Removes dust and prepares the surface for filler or paint application
 Suitable for wet and dry sanding

# Application advice

Perfectly suitable with the Carsystem matting pastes

ArtNo.	Specification	SP	MOQ
156.691	very fine / red / 80 mm	25	1000
156.690	ultra fine / grey / 80 mm	25	1000
156.044	very fine / red / 150 mm	20	160
156.045	ultra fine / grey / 150 mm	20	160

# **Tec Line Mattflex Premium**

Abrasives

Sanding Fleece – Roll – 115 mm × 10 m



### Description

The synthetic resin soaks through the fleece and distributes the sanding grain all over

# Area of application

- Matting and sanding of hard-to-reach areas, smallest corners, folds and dimples prior to filler or paint application = Red – very fine: prior to filler application
- Grey ultra fine: prior to paint application

# **Tec Line Mattflex Pad**

Sanding fleece - Pad - 115 × 230 mm



Description

 Sanding fleece with three dimensional structure
 The synthetic resin soaks through the fleece and distributes the sanding grain all over

# Benefits

High flexibility On a roll for easy cut off in the needed length

# Application advice

Area of application

Application advice

Benefits

Perfectly suitable with the Carsystem matting pastes

ArtNo.	Specification	SP	MOQ
151.616	very fine / red	1	5
151.617	ultra fine / grey	1	5

# **Tec Line Matt Matting Mousse**

Matting paste

# Description

Water-based matting paste

## Area of application

- Blending
- Matting of transition zones Degreasing and cleaning of body parts

### Benefits

- Suitable for metal or plastic parts
   Sanding, cleaning and degreasing in one step
   Improves the adhesion of the paint layer
- Perfect matting result
  Removes silicones and waxes from the surface

ArtNo.	Specification	SP	MOQ
151.947	light grey / 1,0 kg	1	6

# Bite

Matting paste for plastics

### Description

- Water-based matting paste
   Contains natural minerals and special
- degreasing components for plastics

# Area of application

Preparing of plastic parts prior to paint application

# Benefits

Acts very antistatic
 Avoids multiple tempering processes

# Application advice

- Hard-to-reach areas can be treated with the Prep-brush (Art.-No.: 138.301)

ArtNo.	Specification	SP	MOQ
138.807	grey / 560 g	1	6

ArtNo.	Specification	SP	MOQ
152.686	very fine / red	25	100
157.444	extra fine / black	25	100
152.687	ultra fine / grey	25	100
152.688	micro fine / gold	25	100

Matting and sanding of hard-to-reach areas, smallest corners,

Gray – extra line, prior to paint application – especially for blending zones
 Gold – micro fine: prior to paint application – especially for blending zones

folds and dimples prior to filler or paint application Red – very fine: prior to filler application

Perfectly suitable with the Carsystem matting pastes

Black – extra fine: prior to paint appliaction

Extremely fine sanding patternVery thin and extremely flexible

Suitable for wet and dry sanding

Abrasives

# Prep & Scuff

# Matting paste

# Description

Water-based matting paste

# Area of application

- BlendingMatting of transition zones Degreasing and cleaning of body parts

## Benefits

- Sanding, cleaning and degreasing in one step
   Improves the adhesion of the paint layer
- Even matting Removes silicones and waxes from the surface

# Application advice

Hard-to-reach areas can be treated with the Prep-brush (Art.-No.: 138.301)



ArtNo.	Specification	SP	MOQ
137.547	light green / 1.3 kg	1	6
137.548	light green / 5 kg	1	4
137.779	Dispenser for 5 kg	1	1



Special brush

# Description

STATEM

BITE

Special brush for matting pastes

# Area of application

For applying matting pastes on hard-to-reach areas




ArtNo.	Specification	SP	MOQ
138.301	4 cm	1	36

# Abrasives

# **PROFLEX Jupiter**

Film abrasive - 152 mm - 15 holes



### Description

Ultraflexible soft film disc

15 holesAluminium oxide grain

# Area of application

- Dry sandingFiller finish
- BlendingMatting of surfaces
- Finish

## Benefits

- Ultraflexible basis adapts perfectly to the surface
   Surface structure is treated extremely gentle
- Extremely fine sanding pattern
   Reduces the polishing time

## Application advice

- We recommend the use of the Micro Velcro<sup>®</sup>
   We recommend an intermediate cleaning of
- the abrasive surface with a microfiber cloth

ArtNo.	Specification	SP	MOQ
154.449	P 600	50	1000
154.450	P 800	50	1000
154.451	P 1000	50	1000
154.452	P 1200	50	1000
154.453	P 1500	50	1000
153.469	P 2000	50	1000
153.470	P 2500	50	1000
153.471	P 3000	50	1000
156.939	P 4000	50	1000



Film abrasive - 152 mm



## Description

= Ultraflexible soft film disc Aluminium oxide grain

Area of application Dry sandingFinish

# **PROFLEX Jupiter**

Film abrasive – 75 mm



Description Ultraflexible soft film disc

Aluminium oxide grain

# Area of application

- Dry sandingFiller finish
- Blending
- Matting of surfaces
- Finish

# Benefits

- Ultraflexible basis adapts perfectly to the surface
- Surface structure is treated extremely gentle
   Extremely fine sanding pattern
- Reduces the polishing time

# Application advice

- We recommend the use with Micro Velcro<sup>®</sup> We recommend an intermediate cleaning of the abrasive surface
- with a microfiber cloth

ArtNo.	Specification	SP	MOQ
154.444	P 600	50	1000
154.445	P 800	50	1000
154.446	P 1000	50	1000
154.447	P 1200	50	1000
154.448	P 1500	50	1000
153.466	P 2000	50	1000
153.467	P 2500	50	1000
153.468	P 3000	50	1000
156.946	P 4000	50	1000

# **PROFLEX Jupiter**

Film abrasive – 34 mm



Description

Ultraflexible soft film sanding disc
 Aluminium oxide grain

# Area of application

- Removing of small scratches and imperfections
- Finish Flattening of removed imperfections

# Benefits

- Ultraflexible basis adapts perfectly to the surface
   Surface structure is treated extremely gentle
- Extremely fine sanding pattern
   Reduces the polishing time

# Application advice

- We recommend the use with micro Velcro®
   We recommend an intermediate cleaning of the abrasive surface with a microfiber cloth

ArtNo.	Specification	SP	MOQ
154.660	P 1500	50	1000
154.661	P 2000	50	1000
154.662	P 2500	50	1000
154.663	P 3000	50	1000

# Benefits

- Ultraflexible basis adapts perfectly to the surface
- Surface structure is treated extremely gentle
   Extremely fine sanding pattern
   Reduces the polishing time

# Application advice

We recommend the use of the PROFLEX Interface Pads hard ZK/CK We recommend an intermediate cleaning of the abrasive surface with a microfiber cloth

ArtNo.	Specification	SP	MOQ
154.440	P 1500	100	2000
154.441	P 2000	100	2000
154.442	P 2500	100	2000
154.443	P 3000	100	2000




**PROFLEX Jupiter Soft H2O** Film abrasive - 152 mm - Multi hole





**PROFLEX Jupiter Soft H2O** Film abrasive - 77 mm - Multi hole



### Description

- Ultraflexible soft film disc with flexible foam back
- Multi hole
- Aluminium oxide grain

# Area of application

- Finish
- Flattening of removed imperfections
- Wet sanding

### Benefits

- Surface structure is treated extremely gentle
   Extremely fine sanding pattern reduces the polishing time
- Comfortable sanding due to foam back

### Application advice

We recommend using the PROFLEX Jupiter Soft H2O in combination with the CS Sanding Water SW20

ArtNo.	Specification	SP	MOQ
156.515	P 2500	15	300
156.516	P 3000	15	300
156.517	P 4000	15	300



- Ultraflexible soft film disc with flexible foam back
- Multi hole
- = Aluminium oxide grain

### Area of application

- Einish
- Flattening of removed imperfections Wet sanding

## Benefits

- Surface structure is treated extremely gentle
- Extremely fine sanding pattern reduces the polishing time
- Comfortable sanding due to foam back


# Application advice

We recommend using the PROFLEX Jupiter Soft H2O in combination with the CS Sanding Water SW20

ArtNo.	Specification	SP	MOQ
156.524	P 2500	15	300
156.525	P 3000	15	300
156.526	P 4000	15	300

# **PROFLEX Jupiter Soft**

Film abrasive – 152 mm – Multi hole



Abrasives

## Description

Ultraflexible soft film disc with flexible foam back


Multi holeAluminium oxide grain

# Area of application

- Filler finish
- Blending
- Matting of surfaces
  Suitable for dry and wet sanding
  Manual or machine use

# **PROFLEX Jupiter Soft**

Film abrasive – 75 mm – multihole



# Description

Ultra flexible soft film disc with flexible foam back
 Multi hole

Aluminium oxide grain

# Area of application

Matting surfaces

Suitable for dry and wet sanding
 Manual or machine use

## Benefits

- Surface structure is treated extremely gentle
   Extremely fine sanding pattern
   Comfortable sanding due to foam back

# Application advice

- We recommend an intermediate cleaning of the abrasive surface
- with a microfiber cloth We recommend using the CS Sanding Water SW20 for wet sanding

ArtNo.	Specification	SP	MOQ
156.509	P 600	15	300
156.510	P 800	15	300
156.511	P 1000	15	300
156.512	P 1200	15	300
156.513	P 1500	15	300
156.514	P 2000	15	300



# Sanding Water SW20 Sanding water



### Benefits

- Surface structure is treated extremely gentle
   Extremely fine sanding pattern
   Comfortable sanding due to foam back

- Application advice
- We recommend an intermediate cleaning of the abrasive surface with a microfiber cloth
   We recommend using the CS Sanding Water SW20 for wet sanding

ArtNo.	Specification	SP	MOQ
156.522	P 1500	15	300
156.523	P 2000	15	300

### Description

Sanding water
Free of silicones

# Area of application

Wet sanding on clearcoat

# Benefits

- Extends the lifetime of the abrasive
   Optimizes the wetting of the abrasive
   Foaming prevents the tying of the sanding dust with the water


## Application advice

- We recommend using the Carsystem Sanding Water SW20 in combination with PRoFLEX Jupiter Soft H2O

ArtNo.	Specification	SP	MOQ
157.446	incl. spray nozzle / 1 l	1	14
157.447	51	1	4

# **PROFLEX Neptune**

Film abrasive – 130 × 170 mm

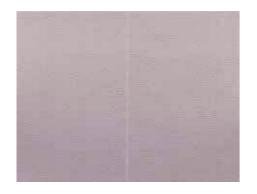

Abrasives

# Description


- Ultraflexible soft film sanding sheet
- Aluminium oxide grainPerforated in the middle

# Area of application

- Filler finish
- Blending
- Deriving
   Matting and flattening of hard-to-reach areas, smallest corners, folds and dimples

# **PROFLEX Neptune Soft**

Film abrasive – 130 × 85 mm – Multihole

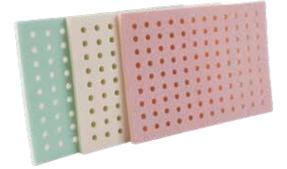

Description

Ultraflexible soft film sheet with flexible foam back Multihole

Aluminium oxide grain

# Area of application

- Filler finish
- Filter finish
   Blending
   Matting and flattening of hard-to-reach areas, smallest corners, folds and dimples
   Suitable for dry and wet sanding

### Benefits

Ultraflexible basis adapts perfectly to the surface
 Extremely fine sanding pattern


### Application advice

We recommend the use of the PROFLEX Neptune Pads with micro Velcro®

ArtNo.	Specification	SP	MOQ
153.472	P 600	50	1000
153.473	P 800	50	1000
154.454	P 1000	50	1000
154.455	P 1200	50	1000
153.474	P 1500	50	1000

# **PROFLEX Neptune Pad MaxGrip**

Hand Pad - 120 × 75 × 6 mm - Multihole

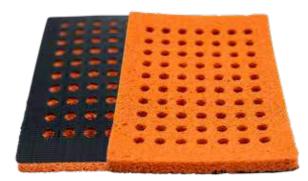

### Description

- Sponge hand pad
- Micro Velcro®
   Degree of hardness: Soft medium

# Area of application

Hand pad for all Neptune sanding sheets

# NEW

### Benefits

- Ultraflexible basis adapts perfectly to the surface
- Extremely fine sanding pattern
   Comfortable sanding due to foam back


# Application advice

- We recommend an intermediate cleaning of the abrasive
- surface with a microfiber cloth.
- We recommend using PROFLEX Neptune Soft with the Carsystem PROFLEX Neptune Pad MaxGrip.
  We recommend using the Carsystem Sanding Water SW20 for wet sanding.

ArtNo.	Specification	SP	MOQ
157.791	P 600	20	400
157.792	P 800	20	400
157.794	P 1000	20	400

# **PROFLEX Neptune Pad**

Hand pad – 78 × 123 × 5 / 7 mm



### Description

- Foam back pad for Neptune sanding sheets
   Micro Velcro®
   Two degrees of hardness: Soft + hard

# Area of application

Soft = hard-to-reach areas, smallest corners Hard = sanding even surfaces

# NEW

# Benefits

- Non-slip
- Ideal for dry and wet sanding with excellent
- water transport (Neptune Soft) Very comfortable feeling
- Adapts perfectly to the surface

ArtNo.	Specification	SP	MOQ
158.097	soft – medium	1	100

# Benefits

2 degrees of hardness: soft and hard

ArtNo.	Specification	SP	MOQ
154.175	78 × 123 × 5 mm / soft	1	20
154.174	78 × 123 × 7 mm / hard	1	20

# **PROFLEX Saturn**

Film abrasive – 152 mm – 15 holes

Description Special film-based sanding disc

Aluminium oxide grain

# Area of application

- Matting and sanding on extra
- hard clear coat surfaces Wet and dry sanding

## Benefits

High aggressiveness = Fast removal of surface structure

## Application advice

We recommend to wet the surface slightly with Sanding Water SW20

Abrasives

ArtNo.	Specification	SP	MOQ
153.482	P 800	50	1000
153.483	P 1000	50	1000

# **PROFLEX Saturn**

Film abrasive - 75 mm

### Description

Special film-based sanding disc = Aluminium oxide grain

# Area of application

Matting and sanding on extra hard clear coat surfaces Wet and dry sanding

# Benefits

High aggressiveness Fast removal of surface structure

# Application advice

We recommend to wet the surface slightly with Sanding Water SW20

ArtNo.	Specification	SP	MOQ
153.485	P 800	50	1000



# **PROFLEX Mercury Sanding Block**

Sanding block – 27 × 33 × 15 mm



### Description


- Rubber block for the use with PROFLEX Mercury sheets
- Two degree's of hardness: Soft + hard

# Area of application

- Soft: Flattening of imperfections (more flexible)
- = Hard: Flattening of dust inclusions

# **PROFLEX Mercury**

Film abrasive – 29 × 35 mm

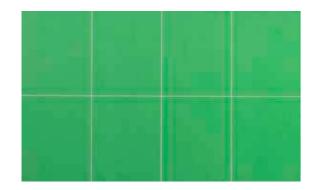

# Description

Film-based sanding sheetsSelf adhesive

- Aluminium oxide grain

# Area of application

- Removing of imperfections in the surface
- FinishFlattening of removed imperfections

### Benefits

- Extremely fast removal of imperfections
- Dry use makes the sanding progress immediately visible
   Also suitable for slightly larger areas


### Application advice

 We recommend the use of the PROFLEX Mercury block soft or hard
 We recommend an intermediate cleaning of the abrasive surface with a microfiber cloth

ArtNo.	Specification	SP	MOQ
154.437	P 1500	200	4000
153.460	P 2000	200	4000
153.461	P 2500	200	4000
153.462	P 3000	200	4000

# **PROFLEX Pluto**

Film abrasive - 34 mm

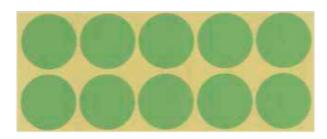

## Description

- Film-based daisy disc
- Self adhesive Aluminium oxide grain

# Area of application

- Removing of imperfections in the surface
- Finish Flattening of removed imperfections



# Benefits

Usable on both sides

Two degree's of hardness for the whole finish process

ArtNo.	Specification	SP	MOQ
156.555	soft / red	2	100
154.173	hard / black	2	100

### Benefits

Extremely fast removal of imperfections

Dry use makes the sanding progress immediately visible

### Application advice

We recommend the use of the PROFLEX Back Pad PSA for machine

- sanding and the Pluto Sanding Blocks for manual use We recommend an intermediate cleaning of the abrasive surface
- with a microfiber cloth

ArtNo.	Specification	SP	MOQ
154.428	P 1500	100	6000
154.429	P 2000	100	6000
154.430	P 2500	100	6000
154.431	P 3000	100	6000
154.432	P 4000	100	6000
154.433	P 5000	100	6000

# **PROFLEX Pluto Sanding Block**

Abrasives

Sanding block

Description

Area of application



Rubber block for the use with Pluto daisy discs

Soft: Flattening of imperfections (more flexible)

Two degree's of hardness: Soft + hard

Hard: Flattening of dust inclusions

# Benefits

Usable on both sides
Two degree's of hardness for the whole finish process Rounded edges perfect for smooth roundings

ArtNo.	Specification	SP	MOQ
156.557	red / soft	2	100
156.556	black / hard	2	100

# **PROFLEX Interface Pad**

Interface pad - 150 mm - 15 holes



# Description

- Interface pads with micro Velcro<sup>®</sup> for PROFLEX Jupiter sanding discs
- Three degree's of hardness: Soft, medium, hard
  Hard = 5 mm
- Medium and soft = 10 mm

### Area of application

- The micro Velcro® allows the use of soft film discs (PROFLEX Jupiter)
- Soft = finest sanding pattern for final finish sanding
   Medium = balance between cutting power and evenness
- Hard = highest cutting power

# PROFLEX Back Pad PSA

Back pad – 30 mm



Description PSA cellular rubber back pad for PROFLEX Pluto daisy discs

### Area of application

Usable with the CS Mini Sanding Macine Usable with the PROFLEX Pluto daisy discs

### Benefits

Perfect balance between cutting power and even sanding pattern in the final sanding process

ArtNo.	Specification	SP	MOQ
155.153	stick / 1/4" inner thread	2	2

# **PROFLEX Interface Pad**

Interface pad – 150 mm



### Description

- Interface pads with micro Velcro® for PRoFLEX Jupiter sanding discs
   2 degree's of hardness: soft + hard
- Thickness: 5 mm

### Area of application

- The micro Velcro® allows the use of soft film discs (PROFLEX Jupiter)
- Soft = finest sanding pattern for final finish sanding
   Hard = highest cutting power

# Benefits

- Selection of three different degrees of hardness
   Micro Velcro<sup>®</sup> does not provoke scratches through the soft film abrasive

ArtNo.	Specification	SP	MOQ
154.295	10 mm / soft	1	20
154.193	10 mm / medium	1	20
155.100	5 mm / hard	1	20

- Selection between two different degree's of hardness
- Micro Velcro<sup>®</sup> does not provoke scratches through the soft film abrasive

ArtNo.	Specification	SP	MOQ
155.101	soft	1	20
155.099	hard	1	20

# **PROFLEX Interface Pad**

# Interface pad – 75 mm



Abrasives

### Description

- Interface pads with micro Velcro® for PROFLEX Jupiter sanding discs
- Three degree's of hardness: hard, medium, soft Hard = 5 mm
- Medium and soft = 10 mm

### Area of application

- The micro Velcro<sup>®</sup> allows the use of soft film discs (PRoFLEX Jupiter)
   Soft = finest sanding pattern for final finish sanding
- Medium = balance between cutting power and evenness
- Hard = highest cutting power

# Benefits

Selection between three different degree's of hardness
 Micro Velcro<sup>®</sup> does not provoke scratches through the soft film

ArtNo.	Specification	SP	MOQ
154.296	soft / 10 mm	1	20
154.194	medium / 10 mm	1	20
155.098	hard / 5 mm	1	30

# **PROFLEX Interface Pad**

Interface pad 34 mm

### Description

- Interface pads with micro Velcro<sup>®</sup>
- for PROFLEX Jupiter daisy discs Hard foam pad
- Thickness: 5 mm Area of application

### Usable with the PROFLEX Jupiter daisy discs

## Benefits

- Hard foam provides a good balance between cutting power
- and even sanding pattern Micro Velcro<sup>®</sup> does not provoke scratches through the soft film

ArtNo.	Specification	SP	MOQ
155.097	hard / 5 mm	5	75

# **PROFLEX Interface Pad**

Interface pad - 30 mm



### Description

Interface pad with micro Velcro® for PROFLEX Jupiter daisy discs Cellular rubber pad
 Thickness: 5 mm

# Area of application

Usable with the PROFLEX Jupiter daisy discs

### Benefits

Hard cellular rubber provides more stability and cutting power Micro Velcro<sup>®</sup> does not provoke scratches through the soft film

ArtNo.	Specification	SP	MOQ
157.137	hard / 5 mm	5	500

# **Paint Planer**

Paint planer and holder

### Description

- Paint planer and holderThe front side of the holder is
- for storing the paint planer The back sides can hold Velcro®
- adhesive daisy discs



Removal of paint imperfections

ArtNo.	Specification	SP	MOQ
142.995	Paint Planer	1	1
142.996	Holder	1	1

# Mini Sanding Discs Grip

Mini sanding discs – Velcro®

# Description

- Paper-based daisy disc
- Wave form Velcro®

## Area of application

- For removing paint imperfections, scratches and dust particles
- Flattening of removed imperfections

### Benefits

- No sharp edges due to wave form
- Extremely fine sanding pattern



ArtNo.	Specification	SP	MOQ
156.592	P 1500 / 1,000 pcs. / bag	1	5
156.593	P 3000 / 1,000 pcs. / bag	1	5
156.594	P 4000 / 1,000 pcs. / bag	1	5

# **Fine Block**

Fine sanding block

### Description

Carbon fine sanding block

# Area of application

Removal of bigger paint imperfections e.g. paint drops or large dust inclusions

## Benefits


Self sharpening

### Application advice

- We recommend using the fine sanding block only wet
- Soak thoroughly before first use for at least 15 min.
- The fine block should not get dry again after being soaked for the first time

ArtNo.	Specification	SP	MOQ
140.979	800	1	10
140.980	1500	1	10
140.981	2000	1	10
140.982	3000	1	10



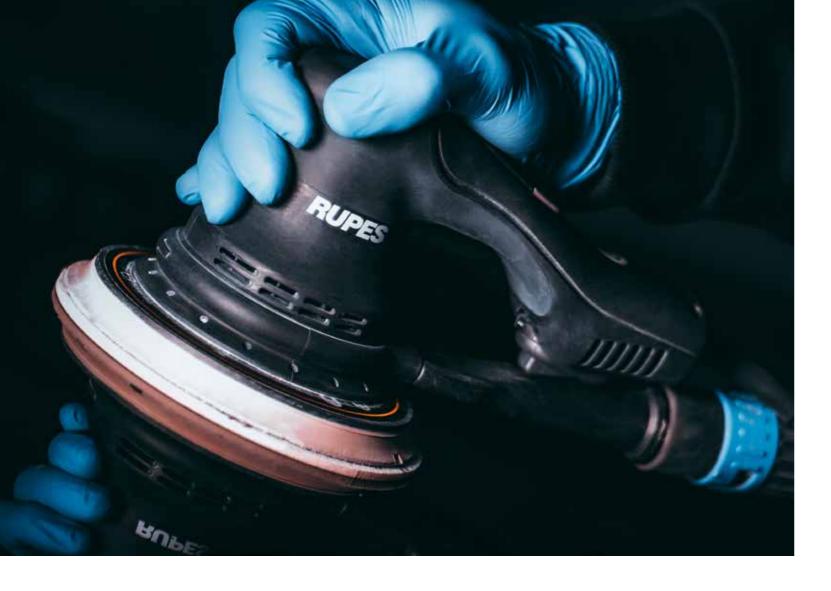

# **RUPES Random Orbital Sander ER**

Random orbit sander, electric



# Description

- Random orbit sander-electric
  3mm / 5mm throw
  Velcro® back pad: 150 mm
  Hole pattern: Multihole
  Adjustable speed up to 10.000 rpm
  Thread: M-8F

ArtNo.	Specification	SP	MOQ
158.283	ER303TE / 3 mm Throw	1	1
158.284	ER305TE / 5 mm Throw	1	1

# **RUPES Skorpio III RH**

Random orbital sander, pneumatic



### Description

- Pneumatic random orbital single-hand sander
   3 mm / 6 mm / 9 mm orbital diameter
   Ø Velcro® back pad: 150 mm

- Carsystem hole pattern 25-holes and oval center hole
   Adjustable speed up to 11,000 rpm.
   Thread: M8

# **RUPES Skorpio E RX**

Random orbital sander, electric



# Description

- Electric random orbital single-hand sander
  3 mm / 6 mm orbital diameter
  Ø Velcro<sup>®</sup> back pad: 150 mm
  Carsystem hole pattern 25-holes and oval center hole
  Adjustable speed up to 10,000 rpm.
  Inner thread: 5/16"
  Power: 250 watt

# Abrasives

# 035

ArtNo.	Specification	SP	MOQ
157.334	RH353A / 3 mm orbital diameter	1	1
157.335	RH356A / 6 mm orbital diameter	1	1
157.336	RH359A / 9 mm orbital diameter	1	1

ArtNo.	Specification	SP	MOQ
157.326	RX253A / 3 mm orbital diameter	1	1
157.328	RX256A / 6 mm orbital diameter	1	1

# **RUPES Random Orbital Sander TA6A**

Abrasives

Random orbital sander Triple Action, pneumatic



ArtNo.	Specification	SP	MOQ
157.339	TA6A / 6 mm orbital diameter	1	1

# **RUPES Orbital Sander SL42AES**

Orbital sander, electric



### Description

- Electric orbital sander
- 4,8 mm orbital diameter
  Size: 70 × 400 mm
- Adjustable speed up to 7,000 rpm.
  Power: 550 watt

# Thread: M8

Description

Pneumatic random orbital sander
 6 mm orbital diameter
 Ø Velcro<sup>®</sup> back pad: 150 mm

Carsystem hole pattern 25-holes and oval center hole
 Adjustable speed up to 8,000 rpm.

# **RUPES Back Pad**

Back pad, 150 mm



### Art.-No. Specification SP MOQ 157.271 M8 / hard 1 10 157.272 5/16" / hard 1 10

# **RUPES Orbital Sander SLP41A**

Orbital sander, pneumatic



# Description

- Pneumatic orbital sander
  4,8 mm orbital diameter
- Size: 70 × 400 mm
  Adjustable speed up to 10,000 rpm.

Description

Back pad with Carsystem hole pattern 25-holes and oval center hole
Strength: Hard
Thread: M8 and 5/16"
For TA-ER-BR-RH-machines

# - Abrasives

ArtNo.	Specification	SP	MOQ
157.329	SL42AES / 4,8 mm orbital diameter	1	1
157.559	rubber plate	1	1

ArtNo.	Specification	SP	MOQ
157.337	SLP41A / 5 mm orbital diameter	1	1
157.559	rubber plate	1	1

# **RUPES Orbital Sander RE21ALN**

Abrasives

Orbital sander, pneumatic

Description

Pneumatic orbital single-hand sander
 3 mm orbital diameter
 Size: 70 × 198 mm

Adjustable speed up to 11,000 rpm.



ArtNo.	Specification	SP	MOQ
157.454	RE21ALN / 3 mm orbital diameter	1	1
157.558	sanding plate	1	1

# **RUPES Mini Random Orbital Sander LD30**

Mini random orbital sander, pneumatic



### Description

Pneumatic mini random orbital sander

- 1,5 mm orbital diameter
   Velcro<sup>®</sup> back pad: 30 mm
- = Adjustable speed up to 7,500 rpm

# **RUPES Random Orbital Single-Hand Sander RA75**

Random orbital sander, pneumatic



Description

- Pneumatic random orbital single-hand sander
   3 mm orbital diameter
- Ø Velcro<sup>®</sup> back pad: 75 mm
- Adjustable speed up to 11,000 rpm.
  Thread: 5/16"

Art.-No. Specification SP MOQ 157.333 RA75 / 3 mm orbital diameter 1 1

# **RUPES Random Orbital Sander TA50**

Random orbital sander, pneumatic



Description

- Pneumatic mini random orbital sander
  3 mm orbital diameter
  Ø Velcro® back pad: 50 mm
  Adjustable speed up to 15,000 rpm.
  Thread: M6

# - Abrasives

ArtNo.	Specification	SP	MOQ
157.330	LD30 / 1.5 mm orbital diameter	1	1

ArtNo.	Specification	SP	MOO

ArtNo.	Specification	SP	MOQ
157.338	TA50 / 3 mm orbital diameter	1	1

# **RUPES Ibrid Nano**

Battery operated mini sanding and polishing machine



# Description

Battery operated mini sanding machine
Provided with: 12 mm orbital diameter unit and 50 mm Velcro® back pad
Adjustable speed up to 5,000 rpm.
Running time: Approx. 30 min
Charging time: Approx. 20 min
Thread: M14-M

ArtNo.	Specification	SP	MOQ
157.318	HR81M / STB Ibrid Nano short neck	1	1
157.319	HR81ML / STB Ibrid Nano long neck	1	1
158.370	Polish Pad 9.DA 40S / extrafine / white	6	6
157.718	Polish Pad 9.BF 40M	6	6
157.717	Polish Pad 9.BF 40H	6	6
157.784	Back pad / Velcro® daisy discs / 30 mm	1	1
157.785	Polishing back pad / Velcro® daisy discs / 50 mm	1	1
157.786	Back pad / Self adhesive daisy discs / 30 mm	1	1
157.787	Rotation unit	1	1
157.788	Orbital diameter unit / 3 mm	1	1

# **RUPES Compact Vacuum Cleaner SV10E**

Compact vacuum cleaner

# Description

- Compact vacuum cleaner for extracting dust and sanding
- dust in the workshop = Can be combined with the RUPES
- Carrier for polishes and abrasives Socket for electrical automatic
- switch-on (max. 1,000 W) Selector button for setting
- Tank volume of the dust bag: 3.5 kg
   Noice level: 75 dB (A)

ArtNo.	Specification	SP	MOQ
157.464	SV10E	1	1
157.603	Dust bag for SV10E	1	1

# **RUPES Ibrid Nano Q-MAQ**

Battery operated mini sanding and polishing machine



### Description

- Battery operated random orbital sander
- 2 mm orbital diameter
   Ø Velcro<sup>®</sup> back pad: 75 mm
- Adjustable speed up to 5,000 rpm.
  Running time: Approx. 30min
  Charging time: Approx. 20min

ArtNo.	Specification	SP	MOQ
157.320	MAQ HQM83 / STB / Ibrid Nano Q-MAG	1	1
157.644	back pad / 75 mm	1	1

# **RUPES Workshop Carrier KC28**

Workshop carrier	M	1
Description	-	
<ul> <li>Workshop carrier for vacuum cleaners</li> <li>2 Tool holder</li> <li>2 Holders for suction hoses</li> <li>2 Rotating front castors with brakes</li> <li>Storage compartment, lockable with key</li> <li>Working surface with large multimeters because</li> </ul>		
multipurpose box = Ergonomic handle	1	C

ArtNo.	Specification	SP	MOQ
157.341	KC28	1	1
157.469	Peg board for KC28	1	1

Abrasives

# **RUPES Vacuum Cleaner S145**

Vacuum cleaner

# Description

RUPES

- Movable vacuum cleaner with 5 m hose
  Tank volume: 45 L
  Air flow: 3,400 L/min.
- Noise level: 67 dB (A)
- Power: 1,200 w
   Max. Power: 2,400 W



ArtNo.	Specification	SP	MOQ
157.343	S145L Profi Vacuum Cleaner	1	1
157.344	S145PL Profi Vacuum Cleaner	1	1
157.471	S145EM Vacuum cleaner	1	1
157.472	S145EPM Vacuum cleaner	1	1
157.560	Dust bag S Serie	1	1

# **RUPES** Carrier

Carrier for polishes and abrasives

# Description

- Workshop carrier for polishes and abrasives
   3 Systainer with drawers
- Stystainer with drawers
   Storage compartment with additional suspension for polishing machines
   Power connection for electric tools
   Impact and shock resistant plastic



ArtNo.	Specification	SP	MOQ
157.342	Carrier	1	1

# Abrasives

# **Excenter Classic**

Random orbital sander, pneumatic

# Description

- Pneumatic random orbital sander without back pad
- 5 mm orbital diamenter
- Thread: 5/16" 24 inner thread

Area of application

For all corse sanding steps

ArtNo.	Specification	SP	MOQ
139.653	5 mm orbital diameter / without back pad	1	1
146.626	connecting piece	1	1
139.838	Excenter Classic Service Kit	1	1

# Finish Sander RC 9332

Random orbital sander 75 mm, pneumatic

# Description

- Pneumatic random orbital single-hand sander
- = 2,5 mm orbital diameter
- Adjustable speed up to 10,000 rpm Inner thread: 1/4"



ArtNo.	Specification	SP	MOQ
143.388	incl. back pad / 2.5 mm orbital diameter / 75 mm Ø	1	1

# **Excenter Back Pad T.19**

Back pad – 150 mm

## Description

Back pad with Carsystem hole pattern

# = 25 holes and oval center hole

Three degree's of hardness: Soft, medium, hard

# Area of application

- Soft = lowest cutting power highest flexibility
   Medium = Balance between cutting power and flexibility
   Hard = Highest cutting power lowest flexibility

# Benefits

Selection between three different degree's of hardness

ArtNo.	Specification	SP	MOQ
156.564	Grip / M8 and 5/16" / soft	1	100
156.227	Grip / M8 and 5/16" / medium	1	100
156.563	Grip / M8 and 5/16" / hard	1	100

# Mini Sanding Machine RC 9330

Mini sanding machine, pneumatic

# Description

Pneumatic random orbital sander for daisy discs incl. 2 back pads (for Velcro<sup>®</sup> and PSA discs) Adjustable speed up to 7,500 rpm.

**Mini Back Pad** Finish back pad

# Description Replacement back pad

for mini sanding machine RC 9330 For self-adhesive discs / Velcro® discs = Inner tread 1/4"



Thread: 5/16"

### Area of application Finish sanding with daisy discs

For Velcro<sup>®</sup> and PSA discs

ArtNo.	Specification	SP	MOQ
143.724	Mini sanding machine incl. back pad stick and grip	1	1

ArtNo.	Specification	SP	MOQ
144.768	28 mm Stick / medium	1	5
144.769	28 mm Grip / medium	1	5

# **Finish Sander Back Pad**

Back pad – 77 mm

### Description

Replacement back pad for Finish Sander RC 9332

= Thread: 5/16" (fixed screw)



ArtNo.	Specification	SP	MOQ
144.917	5/16" UNF connections	1	1



# **Excenter Back Pad Multi M**

Back pad – 150 mm

# Description

- Multi-hole excenter back pad
- Degree of hardness: Medium Suitable for all commercially
- available excenter machines Incl. M8 and 5/16" screws and
- Festool special adapter

# Area of application

Universal back pad for dry sanding work



# Interface Pad

Interface Pad – 150 mm

# Description

- Interface pad with Carsystem hole pattern
- 25 holes and oval center hole
   The hole pattern is based on the 15 hole pattern and 10 additional holes
- = Thickness: 5 mm + 10 mm

# Area of application

- Sanding on all areas with curves, roundings and edges
- Usable with the Carsystem P.19 and F.19 sanding discs

- Perfect adaption to the surface
- Minimizes the risk of sanding through
- Oval center hole helps fitting a new disc perfectly to the plate

ArtNo.	Specification	SP	MOQ
156.225	10 mm	2	50
156.226	5 mm	2	50






# Abrasives

# Pad Saver

Interface Pad – 150 mm

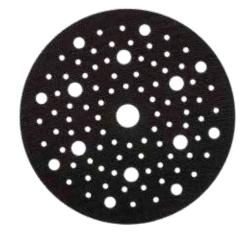

# Description

Interface pad with multi holes for all common hole systems Thickness: 3 mm

# Area of application

The Pad Saver is used as a second Velcro<sup>®</sup> layer

### Benefits

Saves the original Velcro<sup>®</sup> layer of the excenter back pad

ArtNo.	Specification	SP	MOQ
154.099	Pad Saver / 5 pcs. / bag	1	100

# Sanding Block Disc Kit 150

Hand sanding block set - Velcro®



# Soft Interface Pad

Interface pad – 150 mm

# Description

 Universal interface pad
 Multi hole system for all common hole systems

Area of application

Sanding on all areas with curves, roundings and edges

### Benefits

Perfect adaption to the surface
 Minimizes the risk of sanding through

I	ArtNo.	Specification	SP	MOQ
	140.585	grip no holes	2	10
	140.584	grip universal	2	10

# Soft Interface Pad Soft interface pad - 73 mm

Description Soft interface pad Thickness: 10 mm

# Area of application

For all fine sanding

# Benefits

Perfect adaption to the surface Provides a fine and even sanding pattern

ArtNo.	Specification	SP	MOQ
144.923	Soft Interface Pad / Grip	1	10

Sanding Block 198 Kit

Hand sanding block set - Velcro®



### Description

Set of hand sanding blocks with adjustable dust extraction

- Four exchangeable base plates for even, concave and convex surfaces
   Multi hole for all common sanding strips

# h

# Description

- Set of hand sanding blocks with adjustable dust extraction
   Four exchangeable base plates for even, concave and convex surfaces
   Multi hole for all common sanding discs

# Area of application

Usable with 150 mm sanding discs with Velcro<sup>®</sup>

# Benefits

- Four exchangeable base plates for even, concave and convex surfaces
- Dust extraction valve adjustable

ArtNo.	Specification	SP	MOQ
151.904	15 holes	1	1

# Area of application

Usable with Carsystem P.19 sanding strips 70 × 198 mm and Carsystem N20 net sanding strips

- = Four exchangeable base plates for even, concave and convex surfaces
- Dust extraction valve adjustable

ArtNo.	Specification	SP	MOQ
148.702	22 holes	1	1

# Sanding Block 198 Grip

Hand sanding block - Velcro®

# Description

Hand sanding block with dust extraction

# Area of application

Usable with Carsystem P.19 sanding strips 70 × 198 mm and Carsystem N20 net sanding strips

ArtNo.	Specification	SP	MOQ
141.962	2 × 4 holes	1	5

# Sanding Block 400 Grip

Hand sanding block - Velcro®

Description Hand sanding block with dust extraction Area of application

Usable with Carsystem P.19 sanding strips 70 × 400 mm and Carsystem N20 net sanding strips

ArtNo.	Specification	SP	MOQ
141.964	2 × 7 holes	1	5

**Sanding Block Box Grip** 

Hand sanding blocks - Velcro®



# Sanding Block 400 Grip Flex

Hand sanding block - Velcro®

# Description

Flexible hand sanding file with dust extraction

 Free variable for concave and convex surfaces

# Area of application

Usable with Carsystem P.19 sanding strips 70 × 400 mm and Carsystem N20 net sanding strips

# Benefits

Adjustable for concave or convex surfaces

ArtNo.	Specification	SP	MOQ
150.088	14 holes	1	5

# Sanding Block Grip

Hand sanding block - Velcro®

Description Hand sanding block made of polyurethane

# Area of application

Usable with 150 mm Velcro<sup>®</sup> discs



# **Sanding Block Hard**

Hand sanding block - hard

Description

# Hard rubber sanding block

Area of application

Levelling surfaces Wet and dry sanding

ArtNo.	Specification	SP	MOQ
137.431	125 mm × 70 mm	1	12

ArtNo.	Specification	SP	MOQ
137.439	150 mm	1	6

# Description

- Hand sanding blocks
- Franciscular polyurethane
   Four different blocks concave and convex

# Area of application

Usable with 150 mm sanding discs with Velcro<sup>®</sup>

### Benefits

Sanding blocks for concave and convex surfaces

ArtNo.	Specification	SP	MOQ
142.009	Velcro <sup>®</sup> 150 mm	1	16

# **Sanding Block Soft**

Hand sanding block - soft

## Description

Soft rubber sanding block

# Area of application

- Levelling surfaces
  Wet and dry sanding

ArtNo.	Specification	SP	MOQ
137.432	125 mm × 70 mm	1	12



# Abrasives

# Dry Coat-black

Control powder – black



# Description

Extremly fine powder which reaches deep into all imperfections of the surface to make scratches and structures visible

### Area of application

- Sanding control powder for putty or fillered surfaces
   Black for light substrates

# Benefits

- Makes finest scratches, imperfections and pinholes visible
- Solvent-free
- Does not clogg the sanding paper
  Powder cartridge is protected in the handle

ArtNo.	Specification	SP	MOQ
128.366	set of control powder pad + 2 × 30 g refill / black	1	6
132.136	refill, 30g / black	1	12

# **Control-Spray**

Sanding control spray

## Description

Black sanding control spray puts a layer of control paint onto the surface to make sanding imperfections visible

### Area of application

Sanding control of putty or fillered surfaces

# Benefits

Makes finest imperfections in the surface visible Fast drying, grease and silicone-free



ArtNo.	Specification	SP	MOQ
125.779	black / 400 ml	1	12

# **Dry Coat-orange**

Control powder - orange



# Description

Extremly fine powder which reaches deep into all imperfections of the surface to make scratches and structures visible

### Area of application

Sanding control powder for putty or fillered surfaces Orange for dark substrates

# Benefits

- Makes finest scratches, imperfections and pinholes visible
- Solvent-free
   Does not clogg the sanding paper
   Powder cartridge is protected in the handle

ArtNo.	Specification	SP	MOQ
133.849	set of control powder pad + 2 × 15 g refill / orange	1	6
133.848	15 g refill / orange	1	12

# **Tape Off Tool**

Axial sander

### Description

Pneumatic axial grinder Retarded runout

# Area of application

Usable with Carsystem Tape Off Disc Premium

# Benefits

Reduced speed to avoid damaging the paint

ArtNo.	Specification	SP	MOQ
133.172	1 axial sander	1	1

# **Tape Off Disc Premium**

Sticker removal disc

# Description

- Sticker removal disc
- Caramel smell

# Area of application

Residue-free removal of stickers, decorative stripes, decals etc.

# Benefits

No discoloration of the paint

# Application advice

Max. 4,000 r/pm



ArtNo.	Specification	SP	MOQ
152.013	90 mm / set of 2 discs + 1 adapter	1	50

# **Stripping Disc**

Raw cleaning disc

# Description

Cleaning disc for removing semi-soft materials and paint by machine

# Area of application

 Removing of semi-soft materials like underbody coating, stone chip protection, sealing compounds and rust by machine

# Benefits

The substrate remains undamaged

# Application advice

100 mm = max. 6,000 rpm.
150 mm = max. 4,000 rpm.



Art	No.	Specification	SP	MOQ
127.9	999	100 mm	10	10
128.0	000	150 mm	10	10

# SUPER FLEX MULTI *LIGHT* MULTI GREEN RAPID FILL POLYESTER METALLIC SPRAY *PLUS* PLASTIC PRO **DUTTIES** GLAS STEEL FASER ALU SPEZIAL CHANGER *ANTI RUST* ELASTIC PUTTY MIX BOARD **SPEEDMIXER** PUTTY KNIFE





# **NEWS FROM THE CATEGORY**



is a polyester multifunctional putty with a drying time of 10 min / 20°C object temperature.

The Multi Green Rapid has no surface moisture after curing. Because of the latest filling agents it has an improved sandability.

# MULTI GREEN CHANGER

MULTI GREEN

RAPID

VOSSCI

**38** 

Just like our Multi Green, the new Multi Green Changer stands out with stab-proof texture, high stability and optimised grindability. This putty is ideal for filling small to large dents, scratches and sanding marks.



Whilst curing, the Multi Green Changer switches colour from green to yellow and thus it achieves a high process reliability.

# **MULTI GREEN** GLAS LIGHT

is a polyester-multifunctional glass fibre reinforced putty with short glass fibres.

The Multi Green Glas Light has a very precise application and an optimized sandability.

053**Putties** 

NEW NOW!

Opener for putty and filler cans

Art.-Nr.: 158.209

MORE INFORMATION ON PAGE 197

# MULTI GREEN RAPID

# MULTI BLUE CHANGER

Just like our Multi, the new Multi Blue Changer comes with a very creamy texture and excellent application properties. This putty is ideal for filling small to large dents, scratches and sanding marks.

Whilst curing, the Multi Blue Changer switches colour from blue to grey and thus it achieves a high process reliability.







# Multi

Multi-funcional polyester putty

# Description

- Multifunctional polyester putty Universal putty
- Colour: Beige

# Area of application

For filling small to deep imperfections, dents & scratches

### Benefits

Very easy to apply due to its creamy consistency Multi adhesion

ArtNo.	Specification	SP	MOQ
130.857	1 kg tin incl. hardener	1	6
127.977	2 kg tin incl. hardener	1	6
134.155	1.5 kg cartridge incl. hardener	1	8
132.214	2.9 kg cartridge incl. hardener	1	6
128.145	9.7 kg cartridge incl. hardener	2	2

# **Multi Silver Light**

Multi-funcional polyester putty





# Multi Light

Multi-funcional polyester putty





# Description

Multifunctional polyester putty

Ultra lightweight puttyColour: Light beige

### Area of application

For filling small to medium-sized imperfections, dents and scratches

# Benefits

Multi adhesion

ArtNo.	Specification	SP	MOQ
141.503	1.3 kg tin incl. hardener	1	6
142.155	2.2 kg cartridge incl. hardener	1	6
142.156	7.2 kg cartridge incl. hardener	2	2

# **Multi Plus**

Multi-funcional polyester putty





Putties

# ||h|

## Description

- Multifunctional polyester putty
- Lightweight putty
   Colour: Silver

# Area of application

For filling small to medium-sized imperfections, dents & scratches

# Benefits

Creates a visually good-looking transition zone due to its silver colour Multi adhesion

ArtNo.	Specification	SP	MOQ
140.795	1.5 kg tin incl. hardener	1	6

# Description

- Multifunctional polyester putty
- Universal puttyColour: White

# Area of application

= For filling small to deep imperfections, dents & scratches

- Good balance between being semi-solid & creamy
- Very easy to applyMulti adhesion

ArtNo.	Specification	SP	MOQ
138.451	1.6 kg tin incl. hardener	1	6
138.454	8.5 kg cartridge incl. hardener	2	2

# Multi Soft

# Multi-funcional polyester putty





### Description

Multifunctional polyester putty = Fill and fine putty

# Colour: Light grey Area of application

# For filling small to deep imperfections, dents and scratches

# Benefits

Very easy to apply due to its creamy consistency

# Multi adhesion

ArtNo.	Specification	SP	MOQ
137.206	2 kg tin incl. hardener	1	6

# Multi Green Changer

Multi-funcional polyester putty





# **Multi Blue Changer**

Multi-funcional polyester putty





# Description

- Multifunctional polyester putty
- Universal putty Colour: Blue
- Area of application
- For filling small to deep imperfections, dents and scratches

# Benefits

- Colour change during the curing time from blue to grey
- Very easy to apply due to its creamy consistency
   Multi adhesion

ulti	adhesion		

ArtNo.	Specification	SP	MOQ
157.623	2 kg tin (incl. hardener)	1	6

# Multi Green SF

Multi-funcional polyester putty styrene-free





**Putties** 

## Description

- = Multifunctional polyester putty
- Universal putty Colour: Green

# Area of application

For filling small to deep imperfections, dents & scratches

### Benefits

- Colour change during the curing time from green to yellow
   Reduced surface moisture after curing
- Good balance between being semi-solid and creamy
   Multi adhesion

ArtNo.	Specification	SP	MOQ
157.622	1.6 kg tin (incl. hardener)	1	6

## Description

- Multifunctional polyester putty
- Styrene-free
- Colour: Green
- Styrene-free putty differs in the typical putty smell

### Area of application

For filling small to deep imperfections, dents and scratches

- Styrene-free
   Very easy to apply due to its creamy consistency
- Multi adhesion

ArtNo.	Specification	SP	MOQ
156.543	1.75 kg tin incl. hardener	1	6

# Multi Green Plus 1.0 Super Light

# Multi-funcional polyester putty





## Description

- Multifunctional polyester putty
- Ultra lightweight putty
   Colour: Green

### Area of application

For filling small to deep imperfections, dents and scratches

### Benefits

- Completely dry surface after curing
   Improved sandability due to the latest filling agents
   Curing time: 12 min / 20°C objecttemperature
   Multi adhesion
- Application advice
- First sanding step with P 150 possible

ArtNo.	Specification	SP	MOQ
152.357	1 kg tin incl. hardener	1	6
152.978	1.6 kg cartridge incl. hardener	1	6

# **Multi Green Glas**

Multifunctional fiberglass reinforced polyester putty





# Multi Green

Multi-funcional polyester putty





# Description

- Multifunctional polyester putty
- Universal putty Colour: Green
- Area of application For filling small to deep imperfections, dents and scratches

### Benefits

- Reduced surface moisture after curing
- Good balance between being semi-solid and creamy
   Multi adhesion

ArtNo.	Specification	SP	MOQ
146.706	1.6 kg tin incl. hardener	1	6
147.337	2.52 kg cartridge incl. hardener	1	6
149.134	8.11 kg cartridge incl. hardener	1	2

# **Multi Green Glas Light**

Multifunctional fiberglass reinforced lightweight polyester putty





# Description

- Multifunctional polyester putty
   Glass fibre reinforced putty
- Colour: Green

# Area of application

- For filling very deep imperfections, for repairing treated rust spots and GRP parts
   Perfectly suitable for GRP repair
- Benefits
- Short glass fibresMulti adhesion
- Very precise application

ArtNo.	Specification	SP	MOQ
146.707	1.65 kg tin incl. hardener	1	6



# Description

- Multifunctional polyester putty
- Glass fibre reinforced ultra lightweight putty
   Colour: Green

# Area of application

For filling very deep imperfections, for repairing treated rust spots and GRP

- Short glass fibres
   Multi adhesion
- Very precise application Optimized sandability

ArtNo.	Specification	SP	MOQ
158.116	1.3 kg tin incl. hardener	1	6





# Multi Green Rapid

Multi-funcional polyester putty

# Description

- Multifuncional polyester putty Universal putty
- Colour: Green

# Area of application

For filling small to deep imperfections, dents & scratches

Specification

1.3 kg tin incl. hardener

## Benefits

- No surface moisture after curing
   Improved sandability due to the latest filling agents
   Curing time: 10 min / 20°C object temperature
   Multi adhesion

Art.-No.

158.233



SP

1

MOQ

6

NEW

SYSTEM

Soft

Polyester-fill putty





# **Elastic Green**

Polyester-fine putty





# Description

- Polyester putty
- Fine puttyColour: Green

# Area of application

For filling small to medium-sized imperfections, dents and scratches

# Benefits

- Provides an even surface free of pores
- = Minimizes the sanding time

ArtNo.	Specification	SP	MOQ
146.708	2 kg tin incl. hardener	1	6

# Fill

Polyester-fill putty





Putties

# Description

Polyester putty

- Follyester putty
  Fill putty
  Colour: Beige

# Area of application

For filling medium-sized to deep imperfections, dents and scratches

# Benefits

Easy to apply due to its creamy consistency

ArtNo.	Specification	SP	MOQ
130.853	0.9 kg tin incl. hardener	1	6
127.972	1.8 kg tin incl. hardener	1	6
132.116	2.6 kg cartridge incl. hardener	1	6

# Description

- Polyester putty
- Fill puttyColour: Grey

# Area of application

For filling deep to very deep imperfections, dents & scratches

# Benefits

Very high filling performance

ArtNo.	Specification	SP	MOQ
127.971	2 kg tin incl. hardener	1	6

# Metallic

# Polyester-fill putty





# Description

### Polyester putty = Fill putty

- High density due to aluminum content
   Colour: Silver

# Area of application

For filling medium-sized to deep imperfections, dents and scratches

# Benefits

Creates a visually good-looking transition zone due to its silver colour

ArtNo.	Specification	SP	MOQ
130.852	1 kg tin incl. hardener	1	6
127.911	2 kg tin incl. hardener	1	6

# Steel

Polyester-hard putty





# Alu Spezial

Polyester-hard putty





# Description

- Special polyester putty
- Hard putty
  Extremely high hardness range
  Colour: Light grey

# Area of application

For filling very deep imperfections
Re-building of edges and bonded aluminum parts

- Benefits
- Replaces the tin application for aluminium
- Similar characteristic like aluminum
   No sagging of transition zones on bonded replacement parts

ArtNo.	Specification	SP	MOQ
148.524	1.8 kg tin incl. hardener	1	6



Anti rust putty





Putties

## Description

- Special polyester putty
  Hard putty
  Extremely high hardness
  Colour: Alu grey

- Area of application
- For filling very deep imperfections
   Re-building of deformed edges
- Benefits
- Replaces the tin application for welded steel panels
   Highly break resistant
- Fast drying

ArtNo.	Specification	SP	MOQ
138.587	0.9 kg tin incl. hardener	1	6

- Special polyester putty
- Anti rust puttyColour: Red brown

# Area of application

- For filling small imperfections, dents and scratches
   To provide additional rust protection

# Benefits

Additional anti rust layer

ArtNo.	Specification	SP	MOQ
149.612	1.8 kg tin incl. hardener	1	6

# Elastic weiss

# Polyester-fine putty





# Description

- Polyester putty
  Fine putty
  Colour: White

# Area of application

For filling small to medium-sized imperfections, dents and scratches

# Benefits

- Provides an extra fine surface free of pores
- Minimizes the sanding effort

ArtNo.	Specification	SP	MOQ
130.856	1 kg tin incl. hardener	1	6
127.975	2 kg tin incl. hardener	1	6
132.115	3 kg cartridge incl. hardener	1	6
132.723	10 kg cartridge incl. hardener	2	2

# **Liquid Putty**







Polyester-glass fibre reinforced putty

Faser





# Elastic beige

Polyester-fine putty





# Description

- Polyester putty
- Fine puttyColour: Beige

# Area of application

For filling small to medium-sized imperfections, dents and scratches

# Benefits

- Provides an extra fine surface free of pores
- Minimizes the sanding effort

ArtNo.	Specification	SP	MOQ
130.855	1 kg tin incl. hardener	1	6
127.976	2 kg tin incl. hardener	1	6

Putties

# Description

- Polyester putty
- Liquid putty
   Colour: Beige

# Area of application

= For filling small imperfections, dents and scratches

# Benefits

- Provides a perfect result almost free of pores
- Self-levelling

ArtNo.	Specification	SP	MOQ
143.496	1.04 kg bottle incl. hardener	1	8

# Description

- Polyester putty
- Special glass fibre putty
  Less fibres and more resin compared to normal glass fibre putties
  Colour: Brown transparent

### Area of application

- For filling very deep imperfections, for repairing treated rust spots and GRP parts
   Perfectly suitable for GRP repair

## Benefits

Extra long glass fibres

ArtNo.	Specification	SP	MOQ
138.443	1.4 kg tin incl. hardener	1	6

# Glas

# Polyester-glass fiber reinforced putty





# Description

- Polyester putty
  Glas fibre reinforced putty
  Colour: Green

## Area of application

- For filling very deep imperfections, for repairing treated rust spots and GRP parts
   Perfectly suitable for GRP repair

# Benefits

Extra long glass fibres

ArtNo.	Specification	SP	MOQ
130.854	1 kg tin incl. hardener	1	6
127.974	1.8 kg incl. hardener	1	6

# **Multi Super Flex**

Polyester putty highly elastic





# **Glas white**

Polyester-glass fibre reinforced putty





# Description

- Polyester putty
- Glass fibre puttyColour: White

# Area of application

For filling very deep imperfections, for repairing treated rust spots and GRP parts
 Perfectly suitable for GRP repair

Benefits Extra long glass fibres

# Application advice

White hardener prevents any colour change of the putty surface

ArtNo.	Specification	SP	MOQ
144.808	1.8 kg tin (incl. hardener)	1	6



Plastic putty





Putties

### Description

- Multifunctional polyester putty
- High elastic putty
- Colour: Dark grey

# Area of application

For filling small imperfections, dents and scratches on very flexible plastic parts

### Benefits

- No loss of adhesion in the transition zone
- No adhesion primer necessaryMulti adhesion
- Sanding control due to dark colour

ArtNo.	Specification	SP	MOQ
153.284	1.8 kg tin incl. hardener	1	10

# Description

- Polyester putty
- Plastic contour puttyColour: Black

### Area of application

= For filling small imperfections, dents and scratches on plastic surfaces

- Outstanding adhesion on plastic surfaces
   No loss of adhesion in the transition zone
   No adhesion primer necessary
- Sanding control due to black colour

ArtNo.	Specification	SP	MOQ
149.613	1 kg tin (incl. hardener)	1	6

# Flex

Polyester-plastic putty





## Description

Polyester putty
Plastic contour putty
Colour: Dark grey

# Area of application

For filling small scratches and imperfections on plastic surfaces

### Benefits

- Outstanding adhesion an plastic surfaces
- No loss of adhesion in the transition zone

No plastic primer necessary

ArtNo.	Specification	SP	MOQ
134.796	1 kg incl. hardener	1	12

# **Carbo Putty**

Polyester-carbon putty





# Hi Temp

Polyester-High temperature putty





# Description

- Polyester putty
- High temperature puttyColour: Grey

# Area of application

= For filling small to medium-sized imperfections, dents and scratches

# Benefits

- Cured putty can be stoved up to 140°C Provides an even surface free of pores
  Minimizes the sanding effort

ArtNo.	Specification	SP	MOQ
157.033	1.7 kg tin incl. hardener	1	6

# **Carbo Spray**

Polyester-sprayable putty for carbon parts





**Putties** 

### Description

- Special polyester putty
  Fill and fine putty
  Colour: Transparent

# Area of application

- Base layer on horizontal CRP and wood surfaces
- to fill pores and imperfections Transparent base on carbon parts
- Can be applied directly to CRP

### Benefits

- Provides a surface free of pores
- Self-levellingMinimizes the sanding time
- No sagging on carbon parts
  Improves the top coat quality

ArtNo.	Specification	SP	MOQ
148.018	0.5 kg tin incl. hardener	1	12

# Description

- Special polyester putty
- Sprayable puttyColour: Transparent

## Area of application

- For filling small to deep imperfections, dents and scratches
- Transparent base on carbon parts
  Can be applied directly to CRP

- Benefits Very high layer thickness possible
- Very even application by spray gun
  No sagging on carbon parts
  Improves the top coat quality

ArtNo.	Specification	SP	MOQ
148.019	0.820 kg tin incl. hardener	1	6

# **Carbo Spray Thinner**

Carbo spray thinner



# Description Thinner

# Area of application Thinner for Carbo Spray

ArtNo.	Specification	SP	MOQ
148.234	1.0 l tin	1	6

# Spray Plus

Polyester-sprayable putty





# Spray

Polyester-sprayable putty





# Description

Polyester putty Sprayable putty
Colour: Grey

# Area of application

For filling deep imperfections, dents and scratches Usable on passenger cars, trucks or in exhibition stand construction

# Benefits

Very high layer thickness possibleVery even application by spray gun

# Application advice

We recommend to apply an isolating layer in advance (e.g. acrylic filler 35µ). This isolating layer must not be sanded through. This isolating layer avoids blistering in bad environmental conditions.

ArtNo.	Specification	SP	MOQ
127.978	grey / 1.5 kg tin (incl. hardener)	1	6

# **Spray Thinner**

Thinner

# Description

 Thinner for CS Spray Filler and CS Spray Plus

# Area of application

Thinner for polyester spray putty



ArtNo.	Specification	SP	MOQ
124.315	transparent / 1,0 L tin	1	6

Putties

## Description

- Polyester putty
- Sprayable filler
   Colour: Light grey

# Area of application

- For filling deep imperfections, dents and scratches
- Passenger cars or trucks and exhibition stand construction
   Additionally usable on CRP panels

# Benefits

- Very high layer thickness possible
  Very even application by spray gun
- Optmized drying time and surface structure

# Application advice

We recommend to apply an isolating layer in advance (e.g. acrylic filler 35µ). This isolating layer must not be sanded through. This isolating layer avoids blistering in bad environmental conditions.

ArtNo.	Specification	SP	MOQ
135.597	1.5 kg tin (incl. hardener)	1	6

# **BPO Hardener**

Hardener

### Description

BPO hardener paste

# Area of application

Hardener for polyester putty

ArtNo.	Specification	SP	MOQ
132.413	Hardener standard / red / 40 g	10	10
127.038	summer / blue / 40 g	10	10

e etal

# **Putties**

## Тор

## Polyester-brushable putty





## Description

## Polyester putty Brushable putty Colour: Beige

## Area of application

For filling very deep imperfections, dents and scratches

## Benefits

I

High layer thickness possible

Easy to apply even in hard to reach areas

ArtNo.	Specification	SP	MOQ
127.912	1.5 kg tin (incl. hardener)	1	6

## **Polyester Repair Set**

Polyester repair set





## **1K NC Filler**

Nitrocellulose-filler



## NEW

## Description

- Nitrocellulose filler
- IK Filler for application with a spatula
   Colour: Light grey

## Area of application

For filling small imperfections, pinholes and stone chip damages

## Benefits

Fast drying

Multi	adhesion

ArtNo.	Specification	SP	MOQ
158.139	200 g / tube	1	24





**Polyester Repair Resin** 

Polyester repair resin



## Description

- Polyester repair set
  Polyester resin, hardener and glass fibre mat
  Dimension of the glas fabric:
  126.047 = 250 g Set: 12,5 × 50 cm
- = 126.054 = 800 g Set: 125 × 40 cm

## Area of application

- For repairing small holes in the surface
   For repairing GRP parts

ArtNo.	Specification	SP	MOQ
126.047	250 g / set	1	12
126.054	800 g / set	1	12

## Description

Polyester repair resin

### Area of application

- For processing of glass fibre fabric and mats, for repairing small holes in the surface

For repairing GRP parts

ArtNo.	Specification	SP	MOQ
126.050	1.000 g (incl. hardener)	1	6

## Fill putty

## Polyester-fill putty



**Putties** 



Description
-------------

Polyester putty	
= Fill putty	
Colour: Grey	

## Area of application

For filling deep to very deep imperfections, dents and scratches

## Benefits

Very high filling performance

ArtNo.	Specification	SP	MOQ
124.550	250 g tin (incl. hardener)	1	12
124.551	500 g tin (incl. hardener)	1	12
124.552	1,000 g (incl. hardener)	1	12

## **Glass fibre reinforced putty**

Polyester-glass fibre reinforced putty





## **Fine putty**

Polyester-fine putty





## Description

Polyester putty Fine puttyColour: White

## Area of application

For filling small to medium-sized imperfections, dents and scratches

## Benefits

Provides a very fine surface free of pores

= Minimizes the sanding time

ArtNo.	Specification	SP	MOQ
124.124	250 g tin (incl. hardener)	1	12
124.125	500 g tin (incl. hardener)	1	12
124.126	1,000 g tin (incl. hardener)	1	12

## **Glass fibre fabric**

300 g per m²

## Description

Glass fibre fabric
 Weight 300 g/m<sup>2</sup>

## Area of application

For covering small holes in the surface on non-bearing parts

## Benefits

Simple handling of round parts

## Application advice

Usable with polyester repair resin

ArtNo.	Specification	SP	MOQ
125.425	0.5 m <sup>2</sup>	1	12
125.426	1.0 m <sup>2</sup>	1	12

Putties

## Description

- Polyester putty
   Glass fibre reinforced putty
- Colour: Green

## Area of application

- For filling very deep imperfections
   For repairing treated rust spots and GRP parts
   Perfectly suitable for GRP repair

#### Benefits

Extra long glass fibres

ArtNo.	Specification	SP	MOQ
124.036	250 g tin (incl. hardener)	1	12
124.037	500 g tin (incl. hardener)	1	12
124.038	1,000 g tin (incl. hardener)	1	12

## Glass fibre mat

300 g per m<sup>2</sup>

## Description

- Glass fibre mat
   Weight: 300 g/m<sup>2</sup>

## Area of application

For covering small holes in the surface on non-bearing parts

#### Benefits

Stabilizes parts against tensile strength

## Application advice

Usable with polyester repair resin



ArtNo.	Specification	SP	MOQ
125.423	0.5 m <sup>2</sup>	1	12
125.424	1.0 m <sup>2</sup>	1	12

# **Putties**

## Glass fibre fleece

40 g per m<sup>2</sup>

Description

Glass fibre fleece
 Weight: 40 g/m<sup>2</sup>

Area of application

For reinforcing and levelling GRP parts

Benefits

Simple handling of round or conic parts

## Application advice

Usable with polyester repair resin

ArtNo.	Specification	SP	MOQ
125.421	0.5 m <sup>2</sup>	1	12
125.422	1.0 m <sup>2</sup>	1	12

## Aluminium mesh

Aluminium repair mesh

## Description Aluminium repair mesh

Area of application Modelizing of forms before using glass fibre mats or glass fibre fabric

## Benefits

Simple handling of edged work pieces

## Application advice

Can be adapted to the form of the work piece by bending Usable with glass fibre putties

ArtNo.	Specification	SP	MOQ
126.041	25 × 20 cm	1	200



## Dispenser

Putty dispenser – pneumatic



## Dualmatic

Putty dispenser – manual



## Benefits

Perfect ratio between putty and hardener Avoids wrong dosage

#### Application advice

Amount of hardener adjustable (summer / winter)

ArtNo.	Specification	SP	MOQ
123.892	for 3 kg cartidges	1	1
126.854	handle for Dualmatic	1	1
126.861	cut off with handle	1	1

Speedmixer 3 kg

Putty dispenser



#### Description

Dispenser for 3 kg putty cartridges
 Manual withdrawal

- Mobile putty dispenser, also suitable for table or wall mount

## Area of application

Manual withdrawal of putty

Putties

### Description

- Pneumatic putty dispenser
  For 3 kg and 10 kg cartridges
  Wall mount only

## Area of application

Pneumatic dispensing of putty and hardener

#### Benefits

- Perfect ratio between putty and hardener
- Avoids wrong dosage

#### Application advice

Wall mount only

ArtNo.	Specification	SP	MOQ
123.859	A 3C	1	1
123.840	A 10C	1	1
136.912	sealing ring / white plastic sealing plug	1	1

## Description

- Pneumatic putty dispenser
   For 3 kg putty cartridges

### Area of application

Automatic dosing and mixing of filler and hardener

### Benefits

- Perfect ratio between putty and hardener
  Avoids wrong dosage
  Bubble-free putty
  No hand mixing necessary

## Application advice

Manual pre-injection of hardener

ArtNo.	Specification	SP	MOQ
151.017	Speedmixer 3 kg	1	1
152.088	Multi Green slow / Speedmixer / green / 2,523 kg cartridge incl. hardener	6	6
146.427	Mixing nozzles green (pack of 100 pcs.)	1	5

# Putties

## Speedmixer 10 kg

Putty dispenser-electro – pneumatic



## Description

Pneumatic putty dispenser For 10 kg putty cartridges

## Area of application

Pneumatic mixing of putty

## Benefits

- Perfect ratio between putty and hardener
   Avoids wrong dosage
- Bubble-free putty
- No hand mixing necessary

## Application advice

= Full automatic putty production Automatic pre-injection of hardener

ArtNo.	Specification	SP	MOQ
143.347	Speedmixer 10 kg	1	1
146.955	Mixing nozzles / yellow / XL (pack of 100 pcs.)	1	5
143.810	Elastic weiss / very slow / 10 kg cartridge incl. hardener	2	2
144.131	Multi / beige / 9,63 kg cartridge incl. hardener	2	2
143.205	Multi / slow / beige / 9,61 kg cartridge incl. hardener	2	2
145.419	Multi / very slow / beige / 9,61 kg cartridge incl. hardener	2	2
146.808	Multi Light / slow / beige / 6,94 kg cartridge incl. hardener	2	2
147.451	Multi Light / super slow / beige / 6,94 kg cartridge incl. hardener	2	2
149.614	Multi Green / slow / green / 8,18 kg cartridge incl. hardener	2	2

## **Putty Mix Board**

Putty mix board

## Description

Putty mix board

= 100 tear-offs

#### Area of application

Supporting plate to mix putty and hardener

## Benefits

Big area for putty mixing
 Easy disposal of the used tear-off

- No cleaning or sanding necessary

ArtNo.	Specification	SP	MOQ
142.206	100 tear-offs / 26 × 22 cm	1	10

#### **Putty Board** Plastic spreade

Supporting plate for withdrawal of Speedmixer putty



ArtNo.	Specification	SP	MOQ
142.889	10 pcs. bag	1	1

## **Putty Knife** Steel spreader

Description



## Area of application

Base for manual putty mixing

## Benefits

Solvent resistant plastic handle

ArtNo.	Specification	SP	MOQ
137.435	60 mm	1	12
137.436	80 mm	1	12
137.437	100 mm	1	12

## Blacky

Rubber spreader

## Description

Rubber plastic spreader

Area of application

## = For mixing and applying putty manually

## Benefits

Solvent resistantExtremely flexible

ArtNo.	Specification	SP	MOQ
137.433	100 × 60 mm	10	10
137.434	80 × 50 mm	10	10

## Easy Clean Box

Putty spreader cleaning box

#### Description

 Putty spreader cleaning box for reusable putty spreaders Solvent resistant

#### Area of application

For fast and easy cleaning of steel, plastic or rubber putty spreaders

## Benefits

- Closed container for reduced smell
- Significantly cleaner workplace

## Application advice

- We recommend the Carsystem H<sub>2</sub>O Cleaner
- Slower evaporation and less smell

ArtNo.	Specification	SP	MOQ
153.206	spreader cleaning device	1	2



Plastic spreader	
Description	

Area of application

Plastic supporting plate

## **Plastic spreader**

Plastic spreader

## Description

Plastic spreader

## Area of application

For mixing and applying putty manually

#### Benefits

- Solvent resistant
- = Flexible



ArtNo.	Specification	SP	MOQ
146.961	115 × 77 mm	10	10

## **Japanese Putty Knife**

Japanese steel blades

## Description

- Set of steel spreaders
- 4 steel spreaders (5, 8, 10 & 12 cm)

## Area of application

For mixing and applying putty manually

- Solvent resistant
- Perfect grade of stiffness

ArtNo.	Specification	SP	MOQ
139.356	1 Set	1	100

# HAND MASK EASY MASK *MASKING FILM* MASTER TAPE FINE LINE TAPE MASKING PAPER WHEEL COVER FOAMTAPE T-SOFT



# Masking

## **Masking Paper Master**

Masking paper – Roll



ArtNo.	Specification	SP	MOQ
137.613	20 cm × 450 m	1	150
137.614	60 cm × 450 m	1	60
137.615	90 cm × 450 m	1	37
137.616	100 cm × 450 m	1	34
137.617	120 cm × 450 m	1	30
137.618	150 cm × 450 m	1	30

## Description

- Special masking paper
   Both sides sealed
- Extremely tight
- Solvent resistant

#### 40 g/m<sup>2</sup>

## Area of application

Masking paper for all masking work

## Masking film yellow

Masking film – Roll



## Masking Paper Top II

Masking paper - Roll



Art.-No. MOQ Specification SP 155.528  $20 \text{ cm} \times 450 \text{ m}$ 1 150 155.529 60 cm × 450 m 1 60 155.530 90 cm × 450 m 1 37 155.531 120 cm × 450 m 30 1 155.532 150 cm × 450 m 1 30

## Masking film blue

Masking film – Roll



#### Description

Standard masking paper One side sealed Tight
 40 g/m<sup>2</sup>

#### Area of application

Standard masking paper for all masking work

## Description

- Premium masking film
- Extremely thick
- Paint adhesive
  Strongly static
- Correction of masking tape possible
  Heat resistant up to 110°C
- Dust protected in a cardboard box

## Area of application

Premium masking film for all masking work

## Benefits

- Extremely tear-proof
- Perfect cutting abilityAvoids water marks from residual moisture
- High static
- One man use
- Sticks perfectly on the car and can be applied wrinkle-free The strong static avoids overspray from crawling under the film

## Application advice

- Due to the high static we recommend when repositioning, to lift the whole film off the car and re-place it.

ArtNo.	Specification	SP	MOQ
155.572	400 cm $\times$ 200 m (middle folding)	1	28
155.573	500 cm × 120 m (middle folding)	1	28
156.948	600 cm × 100 m (middle folding)	1	28

#### Description

- Paint adhesive
- Strongly static
  Heat resistant up to 110°C Dust protected in a cardboard box

## Area of application

Vehicles with residual moisture

#### Benefits

- High static
- One man use
  Sticks perfectly on the car and can be applied wrinkle-free
- The strong static avoids overspray from crawling under the film
   Avoids water marks from residual moisture

## Application advice

- Due to the high static we recommend when repositioning, to lift the whole film off the car and re-place it

ArtNo.	Specification	SP	MOQ
155.570	400 cm $\times$ 150 m (middle folding)	1	28
155.569	400 cm $\times$ 300 m (middle folding)	1	18
155.571	500 cm × 120 m (middle folding)	1	28

## Masking film green

## Masking film – Roll



## Description

- Standard masking film
- Paint adhesive
- Strongly static
  Heat resistant up to 110°C
- = Dust protected in a cardboard box

## Area of application

Standard masking film for all masking work

## Benefits

## High staticOne man use

- Sticks perfectly on the car and can be applied wrinkle-free
   The strong static avoids overspray from crawling under the film

## Application advice

Due to the high static we recommend when repositioning, to lift the whole film off the car and re-place it

ArtNo.	Specification	SP	MOQ
155.565	$400~\text{cm}\times300~\text{m}$ (middle folding)	1	28
155.567	500 cm $\times$ 120 m (middle folding)	1	45
155.568	600 cm × 100 m (middle folding)	1	28

## MMIR-Mask Light Green

Masking film – Roll



## MMIR-Mask Aqua Tec

Masking film – Roll



## Description

Paint adhesive

- Slightly static
  Heat resistant up to 110°C
- Dust protected in a cardboard box

## Area of application

Vehicles with residual moisture

## Benefits

Avoids water marks from residual moisture

ArtNo.	Specification	SP	MOQ
151.038	400 cm $\times$ 150 m (middle folding)	1	24
152.055	500 cm $\times$ 120 m (middle folding)	1	24

## Easy Mask

Masking film – Roll

## Description

Masking film
Slightly static

- Heat resistant up to 110°C
  Dust protected in a cardboard box
- Area of application
- Standard masking film for all masking work

## Application advice

Limited paint adhesion



ArtNo.	Specification	SP	MOQ
151.199	380 cm × 200 m (middle folding)	1	40
151.181	400 cm × 150 m (middle folding)	1	45

# 8h

## Description

- Standard masking film
- Paint adhesive
- Slightly static
   Heat resistant up to 110°C
- Dust protected in a cardboard box

## Area of application

Standard masking film for all masking work

ArtNo.	Specification	SP	MOQ
150.453	400 cm × 150 m (middle folding)	1	28
150.454	400 cm $\times$ 300 m (middle folding)	1	28
150.455	500 cm $\times$ 120 m (middle folding)	1	28
149.587	600 cm × 100 m (middle folding)	1	28

## Auto Mask

Handy masking film incl. tape

## Description

- Masking film with integrated adhesive tape
  Paint adhesive
  Static

## Area of application

- For masking windows, bumpers and sills
   Manual use



ArtNo.	Specification	SP	MOQ
125.476	refill-roll 0.55 × 33 m	1	40
125.517	refill-roll 1.8 × 33 m	1	20
133.060	roll 2.70 × 20 m	1	20

## Hand Mask

Handy masking film incl. tape



Masking

and 1.8 m on each side.

- Masking film with integrated adhesive tape Paint adhesive
- Static

## Area of application

For masking windows, bumpers and sills Manual use

ArtNo.	Specification	SP	MOQ
144.547	roll / 0,35 × 25 m	1	20
144.549	roll / 0,60 × 25 m	1	16
144.550	roll / 1,00 × 25 m	1	16
144.551	roll / 1,20 × 25 m	1	16
144.552	roll / 1,80 × 25 m	1	16
144.553	roll / 3,60 × 25 m	1	8

## **MMIR Knife Premium**

Cutter tool

Description



## Area of application For cutting plastic film

Cutter tool for plastic filmCoated blade

#### Benefits

Injury protected due to an imbedded blade

ArtNo.	Specification	SP	MOQ
151.513	film knife	2	2

Tape on the top edge.

## **Protective Film SPF**

Surface Protection Film - 60 cm × 20 m



Description Surface protection film Solf-adhesive
Structured surface has an anti-slip effect

## NEW

### Area of application

- Protective film for areas, which need protection against dirt,
- Floors or surfaces in paint mixing rooms
  For smooth and rough surfaces such as wood, concrete, carpets
- Aircraft wings during repair and maintenance

## Benefits

- Resistant to chemicals and solvents
- Recyclable
   Can be easily applied and removes without leaving any residue

#### Application advice

 Only for indoor use (no weather resistance). The protective film SPF is not antistatic. We recommend checking the suitability very carefully when using in ATEX areas.

ArtNo.	Specification	SP	MOQ
158.145	60 cm × 20 m	1	1

## Master Tape Green

Masking tape

#### Description

- Allround masking tape Solvent resistant
- Waterproof
   Temperature resistant
- up to 110°C / 1h

Area of application

Suitable for all standard masking work

## Benefits

Strong initial tack

ArtNo.	Specification	SP	MOQ
149.221	19 mm × 50 m	48	48
149.222	25 mm × 50 m	36	36
149.223	30 mm × 50 m	32	32
149.225	38 mm × 50 m	24	24
149.226	50 mm × 50 m	24	24

Masking

## Liquid Masking

Liquid Masking film

## Description

- Liquid masking film
- Detergent included
  Water-based
  Water soluble and solvent resistant

#### Area of application

 Protects the vehicle from overspray, polishing splashes, dust and slight mechanical damage

#### Benefits

- More environmently friendly than a plastic film
   Car can be moved safely in the work shop

## Application advice

- We recommend the application with a new filler gun
   Nozzle: 1,8 2,2 mm

ArtNo.	Specification	SP	MOQ
138.718	transparent, red / 19 L	1	1

## Master Tape II

Masking tape

#### Description

- High performance masking tape
   Highly solvent resistant
- Waterproof
   Temperature resistant up to 120°C / 1 h

## Area of application

All masking work especially at high temperatures

#### Benefits

Very strong initial tack

ArtNo.	Specification	SP	MOQ
140.201	15 mm × 50 m	60	60
140.202	19 mm × 50 m	48	48
140.203	25 mm × 50 m	36	36
140.204	30 mm × 50 m	28	28
140.205	38 mm × 50 m	24	24
140.206	50 mm × 50 m	24	24



Masking

Specification

15 mm × 50 m

19 mm × 50 m

25 mm × 50 m

30 mm × 50 m

38 mm × 50 m

50 mm × 50 m

## Top Tape

Masking tape

Description Standard masking tape Temperature resistant

up to 80°C / 1 h

Area of application Suitable for all standard masking work

Art.-No.

139.262

139.263

139.264

139.265

139.266

139.267



SP

60

48

36

32

24

24

MOQ

60

48

36

32

24

24

NOQ

200

8

Fine Line	Таре	Blue
Fine line tape		

- Description Fine line tape
- PVC base
- Waterproof Temperature resistant
- up to 155°C / 1 h = High solvent resistance
- Area of application

## Multi colour and design painting

Masking of curves and long, straight lines
Suitable for masking work on rubber and plastic surfaces

## Benefits

Highly flexibleDoes not stretch

ArtNo.	Specification	SP	MOQ
140.083	3 mm × 33 m	10	10
140.084	6 mm × 33 m	10	10
140.085	9 mm × 33 m	10	10
140.086	12 mm × 33 m	10	10
140.087	19 mm × 33 m	10	10

## Silver Tape

Fabric tape

## Description

- = Fabric tape
- Waterproof
   Temperature resistant up to 80°C / 3 h

#### Area of application

- Usable for different masking work
- Sanding edge protection
   Support tape for glued parts

## Benefits

High adhesion on a multitude of surfaces

ArtNo.	Specification	SP	MOQ
138.532	38 mm × 50 m	1	24
135.715	50 mm × 50 m	1	18

## **Slim Tape Green**

Special masking tape

#### Description

- Special masking tape Special paper base
- Extremely thin
- Waterproof Temperature resistant up to 100°C / 1 h

## Area of application

- Suitable for difficult surfaces e. g. rubber,
- plastics, door openers and chromed parts "Last tape" before painting

### Benefits

- Small and handy, fits into every pocket
- High curve stabilityPerfect cutting ability

150.081

ArtNo.	Specification	SP	N

18 mm × 18 m

Slim Tape
Special masking tape

## Description

- Special masking tape Special paper base
- Extremely thin Waterproof
- Temperature resistant up to 100°C / 1 h

#### Area of application

- Suitable for difficult surfaces e.g. rubber, plastics, door openers and chromed parts
- "Last tape" before painting

## Benefits

High curve stability Perfect cutting ability





Masking tape with plastic edge - perforated

#### Description

- Special tape
   Perforated maskig tape with a plastic edge
- Waterproof
   Temperature resistant up to 120°C / 1h

## Area of application

For masking window sealings, lip seals, front and back lights and indicators

#### Benefits

- 2 in 1, lenght wise perforated masking tape with a plastic edge in 9 mm and 11 mm
- Tape and plastic edge are perforated for easy tear off = Paint edge disappears under the sealing

#### Application advice

· We recommend to tear off from plastic to tape

ArtNo.	Specification	SP	MOQ
155.734	perforated / 9 + 11 mm × 10 m	1	24



Maskind



## **Black Tape**

Fabric tape

## Description

- Fabric tape
- Waterproof Temperature resistant up to 80°C / 3h

### Area of application

- Usable for different masking work
- Sanding edge protection
   Support tape for glued parts

#### Benefits

High adhesion on a multitude of surfaces

ArtNo.	Specification	SP	MOQ
147.753	50 mm × 50 m	1	18

## **WR-Lifting Tape**

Masking tape with plastic edge

## Description

2

- Special tapeMasking tape with a plastic edge
- Waterproof
   Temperature resistant up to 120°C / 1h

## Area of application

For masking window sealings, lip seals, front and back lights and indicators

## Benefits

Paint edge disappears under the sealing

ArtNo.	Specification	SP	MOQ
155.720	9 mm × 10 m	1	24



FOAMTAPE *T-SOFT* Foam tape



## FOAMTAPE T-SOFT

LENGTH

FOAMTAF

25 m

1

FOAMTA

The Carsystem FOAMTAPE T-Soft is special foam tape with a silicone-free glue and a temperature resistance up to 80°C / 1 h. FOAMTAPE T-Soft leaves no glue residues and ensures a perfect edge finish.

### Description

- Special foam tape
   Silicone-free glue
   Temperature resistant up to 80°C / 1h

## Area of application

- For closing gaps on doors, bonnets and trunk lids
   Protects inner areas from overspray

- Avoids hard paint edges
- Easy placement
  Perfect edge finish
  No glue residues
- Specification Art.-No. SP MOQ 157.974 1 1 25 m



# Masking

## Foam Tape

Foam tape

Description

- Foam tape Silicone-free glue
- Temperature resistant up to 80°Ċ / 1h

## Area of application

For closing gaps on doors, bonnets and trunk lids

Protects inner areas from overspray

## Benefits

Avoids hard paint edges



## Felgo Tape Rim masking tape

## Description

- Different dimensions for different rim sizes
- Composite backing film provides additional protection for the tire during the sanding



FELGOTAPE

process Temperature resistance: Approx. 60°C / 1h

## Area of application

Masking of rims before sanding and painting process

## Benefits

 Clean, easy and safe masking of the tire up to the edge of the rim
 Extremely hard-wearing special tape for additional protection of the tire during the sanding process

15

## Application advice

Cleaning of the tire and rim ONLY with water or water-based cleaner

ArtNo.	Specification	SP	MOQ
148.861	13 mm × 50 m	1	140
148.862	19 mm × 35 m	1	84

ArtNo.	Specification	SP	MOQ
156.986	15 inch	50	4000
156.987	16 inch	50	4000
156.988	17 inch	50	4000
156.989	18 inch	50	4000
156.990	19 inch	50	4000

## WM Tape

Adhesive Tape

Description Packaging tape

#### CAR SYSTEM MAR SYSTEM

SP

6

MOQ

36

Area of application For sealing packages

Art.-No.

140.794

## **Tec Line Stick**

Sensor pad

## Description

- Covers for parking sensors PET plastic
- Temperature resistant: -40°C up to +180°C
- Solvent resistant

## Area of application

For covering parking sensors or key holes Protection against sanding, painting and polishing

## Benefits

Time saving No dismantling of parking sensors necessary

## Application advice

We recommend to remove the sensor cover while

the paint is still liquid to avoid paint edges

ArtNo.	Specification	SP	MOQ
152.553	150 pcs. / box / 12 mm	1	50
152.554	150 pcs. / box / 18 mm	1	50

## Wheel Cover

Cover hood

## Description

= Cover hood for car wheels Paint and heat protection aluminum sealed fabric Dust and waterproof



## Area of application

Fast masking of wheels before painting Protects car wheels from dust and overspray

ArtNo.	Specification	SP	MOQ
142.483	17 inches / 1 pack = 4 pcs	4	56
158.211	20-21 inches / 1 pack = 4 pcs	4	56

## **Floor Mats**

Foot space protection

#### Description

Protection mats for the car floor

## Area of application

For protecting the foot space during the car repair Protects against water, dust, oil and paint

ArtNo.	Specification	SP	MOQ
142.941	370 × 500 mm / 500 pcs. / roll	1	1

## **Steering Wheel Covers**

Steering wheel protection

## Description

Protection for the steering wheel



## Area of application

For protecting the steering wheel during the car repair
 Protects against water, dust, oil and paint

ArtNo.	Specification	SP	MOQ
142.942	set incl. hand dispenser / 6 × 250 m / roll	1	1

Specification

50 mm × 66 m

## Seat Covers

Seat protection


## Description

- Seat protection covers
- for vehicle seats Non-slip backside
- 500 pcs per roll
- Extremely tear resistant

## Area of application

- For protecting seats during the car repair
   Protects against water, dust, oil and paint

ArtNo.	Specification	SP	MOQ
142.940	820 × 1,300 mm / 500 pcs. roll	1	1

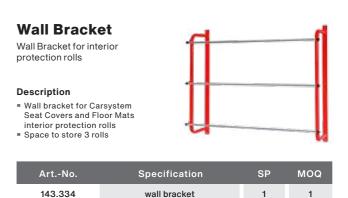



2K CARBO CLEAR PLUS RALLYE-SPRAY MULTI-MIX CUPS CC.21 X-PRESS FIVE ACRYL THINNER SPEED PLUS ELASTIC VE MIXING STICKS A[ UV CLEAR PAN DUST KEEPER AF.21 X-PERT PLASTIC PRIMER ACTIVATOR HPP PRIMER CC.20 X-PERT BOOTH MASK INTERFACE PAD PAINT SYSTEM CPS 1K EPOXY PRIMER 2K HIGH-SPEED KLARLACK 2K FILLER WET ON WET PLUS **BUMPER PAINT SPRAY** 





## CC.21 X-PRESS FIVE

is an extremely fast drying 2K premium acrylic clear coat for small to medium paint works.


The CC.21 X-PRESS FIVE is VOC compliant, user-friendly and has excellent gloss and flow properties.



## **AF.21 X-PERT**

is a universal 2K acrylic filler for all common paint works in a bodyshop from spot repair to full vehicle and can be set up as a high build filler as well as a wet-on-wet filler with a special thinner.



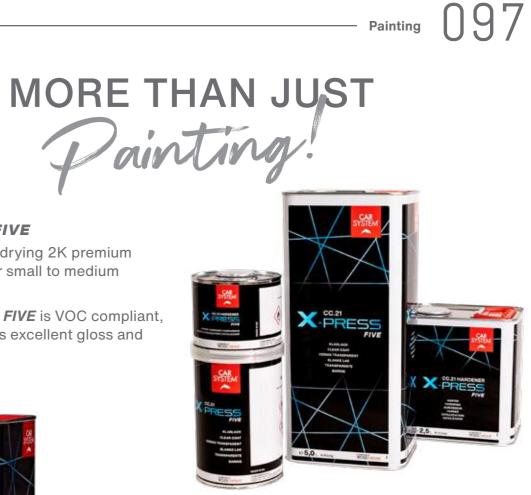

# PAINTING

## CC.20 X-PERT

is a fast drying 2K acrylic clear coat for all common painting work in a paint shop, from small parts to complete painting. The clear coat **CC.20 X-PERT** is VOC-compliant, very user friendly, has a very high final hardness and a brilliant gloss.

## **2K Clear VOC Speed Plus**

2K Clear coat



## Description

= 2K Acrylic clear coat

Premium quality
Drying time: 15 min / 60°C object temperature
VOC compliant

## Area of application

All common paint works from spot repair to full vehicle
 Rapid work process for full vehicle painting required

## Benefits

- Very fast drying
  Brilliant gloss
  Very good surface quality
  Very user friendly
  Extremely wear resistant

## Application advice

We recommend a fast and efficient way of working for complete paint jobs

ArtNo.	Specification	SP	MOQ
152.563	A+B comp. / 1.5 I	1	12
151.899	A comp. / 5.0 I	1	4
151.901	Hardener / 2.5 I	1	4

## CC.20 X-pert

2K Clear coat



## CC.21 X-press FIVE

2K Clear gross



## NEW

- Description

- 2K Acrylic clear coat
  Premium quality
  Drying time: 5 min / 60°C object temperature
  VOC compliant

## Area of application

For small to medium paint works

## Benefits

- Extremely fast drying time
   Excellent gloss and flow properties
   Very user-friendly
- Very good surface quality

ArtNo.	Specification	SP	MOQ
158.251	A+B comp. / 1.5 I	1	12
158.249	A comp. / 5 I	1	4
158.250	Hardener / 2.5 I	1	4

**2K Clear VOC Premium** 

2K Clear coat



## NEW

## Description

- 2K Acrylic clear coat
  All-purpose clear coat
  Drying time: 20 min. / 60°C object temperature
  VOC conform

#### Area of application

All common paint works in a paint shop from individual parts up to full vehicle paintings

#### Benefits

- Fast drying time
  Very high final hardness
- Brilliant gloss

## Application advice

We recommend a fast and efficient way of working for complete paint jobs

ArtNo.	Specification	SP	MOQ
158.423	A + B Comp. / 1,5 L	1	12
157.450	A comp. / 5 I	1	4
157.451	Hardener / 2.5 I	1	4

- 2K Acrylic clear coat
- Universal clear coat
   Drying time: 30 min / 60°C object temperature (hardener standard)
   VOC compliant

### Area of application

= All common paint works from spot repair to full vehicle

- Good surface quality
  Long pot life

ArtNo.	Specification	SP	MOQ
146.714	A-comp. / 5 L	1	4
147.019	Hardener standard / 2.5 L	1	4
147.361	Hardener slow / 2.5 L	1	4
147.862	Hardener fast / 2.5 L	1	4

## 2K Clear VOC 420

2K Clear coat



## Description

= 2K Acrylic clear coat

Universal clear coat
 Drying time: 30 min / 60°C object temperature (hardener standard)
 VOC compliant

## Area of application

All common paint works from spot repair to full vehicle

## Benefits High final surface hardness

ArtNo.	Specification	SP	MOQ
144.138	A-comp. / 1.0 L	1	12
144.140	Hardener 420 standard / 0.5 L	1	12
144.139	Hardener 421 fast / 0.5 L	1	12
142.953	A-comp. / 5.0 I	1	4
144.449	Hardener 422 slow / 2.5 L	1	4
144.107	Hardener 420 standard / 2.5 L	1	4
144.108	Hardener 421 fast / 2.5 L	1	4
144.446	Hardener 423 very fast / 2.5 L	1	4

## 2K Clear VOC CC.19 AS

2K Clear coat



## **2K Clear VOC HS-SR**

2K Clear coat



## Description

2K Acrylic clear coat

- Iniversal industrial clear coat
   Drying time: 30 min / 60°C object temperature (hardener standard)
   VOC compliant

## Area of application

All common paint works from spot repair to full vehicle

## Benefits

High scratch resistance
High initial hardness directly after curing

ArtNo.	Specification	SP	MOQ
153.223	A+B comp. / hardener slow / 1.5 I	1	12
153.774	A+B comp. / hardener standard / 1.5 I	1	12
151.909	A-comp. / 5.0 I	1	4
151.913	Hardener slow / 2.5 l	1	4
151.910	Hardener standard / 2.5 I	1	4
151.911	Hardener fast / 2.5 I	1	4



2K Clear coat matt



## Description

- 2K Acrylic clear coat
  Industrial clear coat
  Drying time: 25 min. / 60°C object temperature
  VOC compliant

## Area of application

Small parts and spot repair

## Benefits

- Especially high initial hardness
   High UV, chemical and mechanical resistance

ArtNo.	Specification	SP	MOQ
156.931	A+B comp. / 1.5 I	1	12
156.929	A-comp. / 5.0 I	1	4
156.930	Hardener / 2.5 I	1	4

## Description

- 2K Acrylic clear coat matt
  Matt level: Matt 148.983
  Matt level: Silk-matt 148.986 Drying time: 30 min / 60°C object temperature (hardener standard)
   VOC compliant

ArtNo.	Specification	SP	MOQ
148.983	A-comp. matt / 1.0 I	1	12
148.986	A comp. silk-matt / 1.0 I	1	12
148.985	Hardener standard / 0.5 I	1	12
148.984	Hardener fast / 0.5 I	1	12

## **2K Carbo Clear Plus**

## 2K Carbo clear coat



## Description

- 2K Acrylic clear coat
  Premium clear coat for carbon surfaces
  Drying time: 15 min. / 60°C object temperature
  VOC compliant

#### Area of application

- Special clear coat for carbon parts
- Benefits
- Very fast drying time
- Brilliant gloss
  Very good surface quality
- Very user friendly
   Extremely wear resistant
- High UV protection

ArtNo.	Specification	SP	MOQ
153.217	A-comp. / 1 L	1	12
153.218	Hardener / 0.5 L	1	12
153.207	A-comp. / 5 L	1	4
153.208	Hardener / 2.5 L	1	4

## EF.21 EP-Filler

2K Hybrid Füller



#### Description

- = 2K Hybrid filler acrylic / epoxy
- Universal fillerColour: yellowish (approx RAL 7032)
- Colour: yellowish (approx NAC rosc)
   Drying time: Standard: 30 min / 60 °C objecttemperature
   Wet-on-wet: 30 min / 20 °C objecttemperature
- VOC compliant

## **UV Clear**

Transparent UV Clear coat

## Description

- UV clear coat Clear coat for dap application
- Drying time: 30 60 sek. (CS UV lamps)
   VOC compliant

## Area of application

Art.-No.

154.528

Filling of pinholes, small scratches and stone chips in the clear coat

## Benefits

Extremely time saving
 Perfect solution for spot repairs

## **UV Filler Spray** UV Filler Spray

Description UV Filler spray

## Area of application

- Spot repairFilling of small parts
- Benefits

CLEA

MOQ

20

SP

1

100% rust protection Extremely time saving

#### Application advice

- On plastic substrates, the Carsystem plastic
- Primer must be applied first
  On steel, aluminium and galvanized steel the Carsystem Etch Primer or 1K Epoxy Primer must be applied first



SYSTEM

ArtNo.	Specification	SP	MOQ
154.190	transparent grey / 400 ml	1	6

AF.21 X-pert 2K Acrylic Filler



#### Description = 2K Acrylic filler Universal filler VOC compliant

Specification

transparent / 100 ml

## NEW

#### Area of application

For all common filler applications on small parts or complete cars
 Adhesion to steel, aluminium, KTL, old and new coatings on and under polyester puttys

#### Benefits

- Settable as wet-on-wet
- High corrosion resistanceExcellent sandability
- Chromate free

ArtNo.	Specification	SP	MOQ
158.248	A + B-Comp. / 1.5 L	1	4
158.246	A-Comp. / 5 L	1	12
158.247	Hardener / 2.5 L	1	12

NEW

#### Area of application

- All common paint works from spot repair to full vehicle Very good adhesion to steel, aluminium, e-coat primers and polyester fillers
- Painting new parts with e-coat primers Anti corrosions protection

- Settable as wet-on-wet
- Excellent sandability
   Layer thicknesses can be flexibly adjusted
- (from low to very high layer thicknesses) Application on e-coat primers without sanding

ArtNo.	Specification	SP	MOQ
158.216	A-Comp. / white / 3.6 L	1	4
158.218	A-comp. / grey / 3.6 L	1	4
158.219	A-comp. / black / 3.6 L	1	4
158.220	Hardener / 0.9 L	1	4
158.221	Thinner standard / 1 L	1	12
158.222	Thinner wet-on-wet / 1 L	1	12

## AF.21 1K Filler

1K Hybrid filler

Description

VOC compliant



1K Hybrid filler – acrylic / epoxy
 Drying time: 10 min / 60°C object temperature

## NEW

## Benefits

100% rust protection
Very user friendly
Very good sandability

ArtNo.	Specification	SP	MOQ
158.244	grey / /1L	1	12
158.245	Thinner / /1L	1	12

## **2K Filler Vario Plus**

2K Acrylic filler



## Description

2K Acrylic filler
High build filler
Colour: Light grey
Drying time: Normal layer: 30 – 35 min / 60°C object temperature
High build: 45 min (60°C object temperature) High build: 45 min / 60°C object temperature

= VOC compliant

## 2K VOC Filler 540

2K Acrylic filler



## Description

- 2K Acrylic filler
- Universal filler
   Drying time: 30 45 min / 60°C object temperature (hardener standard) VOC compliant

## Area of application

All common paint works from spot repair to full vehicle

## Benefits

High filling power
Variable due to three different hardeners Winter hardener CT available for low temperatures

ArtNo.	Specification	SP	MOQ
144.541	A+B comp. / hardener very fast / white / 1.25 L	1	12
147.432	A+B comp. / hardener standard / grey / 1.25 L	1	12
144.539	A+B comp. / hardener very fast / grey / 1.25 L	1	12
144.540	A+B comp. / hardener very fast / black / 1.25 L	1	12
149.816	Hardener / very fast / 0,25 I	1	24
144.354	A-comp. / white / 3.6 L	1	4
144.026	A-comp. / grey / 3.6 L	1	4
144.353	A-comp. / black / 3.6 L	1	4
144.977	Hardener VOC 541 / standard / 0,9 I	1	12
144.027	Hardener very fast / 0.9 L	1	12
153.493	Hardener VOC 541 CT / 0,9 I	1	12



2K Acrylic filler



## Description

= 2K Acrylic filler

- Express filler
   Drying time: 15 20 min / 60°C object temperature
- VOC complaint

#### Area of application

- All common paint works from spot repair to full vehicle
  Also usable as high build filler
  Filler: 60 to 180μ
  High build filler: 85 to 255μ

#### Benefits

- Very high filling power
   The filler can be variably adapted by adding up to 30 % thinner

ArtNo.	Specification	SP	MOQ
152.058	A+B comp. / light grey / 1.2 L	1	12
152.057	A-comp. / light grey / 3.5 L	1	4
147.682	Hardener / 0.7 L	1	12

### Area of application

- Perfectly suitable for small parts, spot repair and air drying
   All common paint works from spot repair to full vehicle

## Benefits

Fast air-drying
Very good sandability

ArtNo.	Specification	SP	MOQ
152.580	A + B comp. / grey / 1.25 L	1	12
152.416	A-comp. / white / 3.6 L	1	4
152.417	A-comp. / grey / 3.6 L	1	4
152.418	A-comp. / black / 3.6 L	1	4
152.419	Hardener / 0.9 L	1	12

## **2K Filler Wet on Wet Plus**

2K Acryl filler



## Description

- 2K Acrylic fillerWet-on-wet filler
- Drying time:
  Wet-on-wet: 15 20 min / 60°C object temperature
- Sanding filler: 20 min / 60°C object temperature
   VOC complaint

## Area of application

Painting new parts with e-coat primers

#### Benefits

- Application on e-coat primers without sanding
- Rust protection on bare metal parts

ArtNo.	Specification	SP	MOQ
153.455	A+B - comp. / grey / 1.05 L	1	12
153.456	A-comp. / grey / 3.6 L	1	4
153.457	Hardener / 0.6 L	1	12



ArtNo.	Specification	SP	MOQ
152.788	transparent / 1 L	1	12

## **Tinting paste filler**

Tinting paste

## Description

Tinting paste

- Area of application Tinting paste for Carsystem
- acrylic fillers Max. addition: 1 5 %

## Benefits

For matching the filler to the basecoat shade

## Application advice

 Mix tinting paste and A-component first before adding the hardenerto avoid adhesion problems

ArtNo.	Specification	SP	MOQ
148.505	red / 0.5 L	1	30
148.504	black / 0.5 L	1	30

## **Elastic Additive**

Elasticizer

Description Elastic additive

## Area of application

Additive for Carsystem acrylic fillers and clear coats

For painting flexible substrates
Addition up to 20 %

## Benefits

Improvement of flexibility Minimizes the risc of cracks

## Application advice

Mix additive and A-component first before adding hardener to avoid adhesion problems



-

-

ArtNo.	Specification	SP	MOQ
155.543	transparent / 1 L	1	12



Reaction accelerator

#### Description Reaction accelerator additive

- Area of application Additive to speed up the drying
- process of Carsystem fillers and clear coats Max. addition in fillers: 10 %
  Max. addition in clear coats: 2 %

## Benefits

- Accelerates the drying time about 15 %
- Only usable with standard or slow hardeners to avoid adhesion
- problems or matting

ArtNo.	Specification	SP	MOQ
147.695	1L	1	12



1005

## Painting



## **Acryl Thinner**

Acrylic thinner

## Description

Acrylic thinner

#### Area of application

For all Carsystem fillers and clear coats



ArtNo.	Specification	SP	MOQ
150.331	transparent / standard / 1 I	1	12
141.479	transparent / standard / 5 I	1	4
153.171	transparent / slow / 5 L	1	4
152.456	transparent / fast / 5 I	1	4

## Spotblender

Blending thinner

## Description

Blending thinner

## Area of application

For homogeneous transition zones between old and new paint for 1K and 2K clear coats and 2K top coats



ArtNo.	Specification	SP	MOQ
148.989	1L	1	12

## Multi-Mix Cup

## Disposable mixing cups



## Description

Disposable mixing cups

## Area of application

For clean and accurate mixing of all fillers, base coats, clear coats etc.

## Application advice

Use only the scale of the mixing cup and not additionally the scale of a measuring stick. Cups are conic so there could be a difference

ArtNo.	Specification	SP	MOQ
140.545	cup / 385 ml	200	200
140.546	cup / 750 ml	200	200
140.547	cup / 1400 ml	200	200
140.548	cup / 2300 ml	100	100

## **Dispenser Multi-Mix**

Wall bracket for Multi-Mix Cups



## **Plastic Can Empty**

## Paint tins

## Description

- Plastic paint tin
   Solvent resistant
- Tacky labels included

## Area of application

- Stock of solvent and
- water based paint = Long stock life due to
- the airtight closing lid

## Benefits

- Hard and very stable plastic tin = Airtight lid prevents content from drying out

ArtNo.	Specification	SP	MOQ
144.957	0.5 L / 100 pcs. per carton	100	100
144.958	1.0 I / 100 pcs. per carton	100	100
145.784	1.8 L / 100 pcs. per carton	100	100

## Multi Mix Lids

Disposable lids



## Description

Lid for disposable Multi-Mix Cups

## Area of application

For sealing the Carsystem Multi-Mix Cups and Multi-Mix Cups 2.0
 For storing residual material in the Multi-Mix Cups in an airtight, clean manner

ArtNo.	Specification	SP	MOQ
140.549	lid / 385 ml	200	200
140.550	lid / 750 ml	200	200
140.551	lid / 1400 ml	200	200
140.552	lid / 2300 ml	200	200

#### Description

Dispenser for Multi-Mix Cups

## Area of application

For Carsystem Multi-Mix Cups

## Benefits

- Space-saving storage
- Protection against contamination from the environment

ArtNo.	Specification	SP	MOQ
137.664	0.385 L	1	1
137.665	0.75 L	1	1
137.666	1.4 L	1	1
137.667	2.3 L	1	1

## Multi-Mix Bucket

Paint mixing bucket

#### Description

Disposable paint mixing bucket with a handle

#### Area of application

- For mixing bigger quantities of paint material
   For trucks, busses, rail vehicles etc.

- Very stableAntistatic



ArtNo.	Specification	SP	MOQ
144.649	5,5 L / 36 pcs. per carton	1	1
145.315	lid / 5.5 L	1	1



## Mixing Stick Alu

Measuring stick

## Description

Aluminium based stir and measuring stick
Printed scale with different mixing ratios

#### Area of application

- For stiring and mixing of paint materials
   For measuring the right mixing amounts of Carsystem fillers and clear coats
- or oarsystem mers and clear coats
- Application advice
- To use only with cylindric containers


ArtNo.	Specification	SP	MOQ
146.695	2:1 / 4:1 / 370 × 32 mm	1	100
147.359	5:1 / 6:1 / 370 × 32 mm	1	100

## Multi Strain

Paint strainer

## Description

 Disposable paint strainer
 Paper funnel with precise nylon-based filter mesh



30 - 30 - 21+ 4:1+

21.

臣

5.1+ 6.1+

4:1+ 5:1+ 6:1+

## Area of application

Filtration of all common painting materials

ArtNo.	Specification	SP	MOQ
146.957	blue / 125 µ	125	1000
146.958	yellow / 190 µ	125	1000

## Paint System CPS

Disposable paint cup system



## DescriptionDisposable paint cup system

Area of application

For processing water-based and solvent-based paint systems

## Benefits

Overhead painting is possible

Clean work due to mixing in the painting cup
Storage of residual material is possible

## Application advice

We recommend to empty the paint channel before removing the cup:
 Hold the gun upside down, close the nozzle and pull the trigger briefly
 The paint channel is now completely empty and the cup can be removed without dripping

ArtNo.	Specification	SP	MOQ
158.056	Set / 400 ml - 125µm / 50 pc	1	1
158.057	Set / 600 ml - 125µm / 50 pc	1	1
158.067	Set / 800 ml - 125µm / 26 pc	1	1
158.063	Adapter A7 Devilbiss	1	1
158.064	Adapter A5 Iwata W400 + Sata external thread	1	1
158.065	Adapter A87 Iwata WS400	1	1
158.066	Adapter A82 Sata QCC	1	1
158.059	Lids / 200-400 ml / 125 µm / 25 pc	1	1
158.061	Lids / 600-800 ml / 125µm / 25 pc	1	1
158.062	Lids / 600-800 ml / 190 µm/ 25 pc	1	1
158.472	Hard cup / 400 ml	1	5
158.473	Hard cup / 600 ml	1	5
158.474	Hard cup / 800 ml	1	5

## Painting

# 111

## **Mixing Stick Black**

Plastic mixing stick

## Description

- Plastic mixing stick
- Solvent resistantNicely flexible

## Area of application

For easy stiring and mixing of paint materials



ArtNo.	Specification	SP	MOQ
144.752	23 × 1.8 cm	100	100

## Dispenser

Dispenser for paint strainers

## Description

- Dispenser for paint strainersSpace for 150 paint strainers
- Space for 150 paint strainers

## Area of application

For paint strainers

#### Benefits

 Space-saving solutionProtection against contamination from dust and overspray



ArtNo.	Specification	SP	MOQ
146.960	Dispenser	1	1

## **Booth Mask White**

Booth protection mask



## Description

- Booth protection mask
- Colour: White Water-based
- Forms a highly opaque, shiny film

#### Area of application

Protects the spray booth walls against overspray
 Perfectly suitable for paint booths which cannot be cleaned with water

#### Benefits

- Covers all existing paint residues
   Provides perfect light conditions
- Forms a high layer thickness
  Easy to remove

## Application advice

We recommend a nozzle size of 2.2 – 2.5 mm

ArtNo.	Specification	SP	MOQ
153.205	white / 19 L	1	1

## **Booth Mask Stick**

Booth protection mask



## **Booth Mask**

Booth protection mask



#### Description

- Booth protection mask
- Colour: Transparent Water-based
- Provides a glass clear, tack free protection film

## Area of application

Protects booth walls and lightings against overspray
 Perfectly suitable for lightings and paint booths which cannot be cleaned with water

## Benefits

- Biodegradable

- Blodegraduate
  Glass clear
  Does not influence the light conditions
  Protects for 3 month or 150 paint cycles
  Forms a tack free film, which can be peeled off

#### Application advice

We recommend a nozzle size of 1.8 – 2.2 mm

ArtNo.	Specification	SP	MOQ
149.358	transparent / 5 I	1	4
149.359	transparent / 20 L	1	1

## **Dust Keeper**

Dust binding agent



Painting

#### Description

- Booth protection mask
  Colour: Transparent
- Water-based
   Provides a clear, tacky protection film

#### Area of application

- Protects booth walls and lightings against overspray
   Perfectly suitable for booth walls
- Absorbs the overspray

## Benefits

- Biodegradable
  Dust and lints stick on the tacky film
  Water soluble

## Application advice

= We recommend a nozzle size of 1.8 - 2.2 mm

ArtNo.	Specification	SP	MOQ
149.338	transparent / 5 L	1	4
149.339	transparent / 20 L	1	1
149.340	transparent / 25 L	1	1

#### Description

- Dust binding agent for the floor
   Colour: Transparent
   Water-based

#### Area of application

- Application on the spay booth floor to hold down the dust
   For show rooms e. g. car dealers

## Benefits

Improved paint quality by reducing the dust inclusions

#### Application advice

We recommend using a pump spray bottle

ArtNo.	Specification	SP	MOQ
149.341	transparent / 5 L	1	4

## S.21 2K High Speed Clear Coat

2K Spot repair clear coat

Description 2K Acrylic clear coat spray

Area of application For painting small parts Especially suitable for spot repair

Benefits No spray gun application necassary Very fine atomisation
 Long pot life





NEW

ArtNo.	Specification	SP	MOQ
157.795	250 ml	1	6

2K High-Speed K	Clarlack
-----------------	----------

2K Spot-repair clear coat

Description = 2K Acrylic clear coat spray

Area of application For painting small parts = Especially suitable for spot repair

Benefits No spray gun application necessary

Very fine atomisation
 Long pot life

\_



ArtNo.	Specification	SP	MOQ
149.421	transparent / 400 ml	1	6

## **Spotblender Spray**

Blending thinner spray

Description Blending thinner spray



Benefits

No spray gun application necessary



ArtNo.	Specification	SP	MOQ
145.987	transparent / 400 ml	1	12

## **2K Epoxy Grundierfüller**

2K Spot-repair epoxy primer

## Description

2K Epoxy filler spray Colour: Light grey

Art.-No.

149.424

Area of application For primering small parts
 Especially suitable for spot repair

## Benefits

 Variable spray nozzle
 Perfect adhesion and rust protection properties Free of isocyanate

## S.21 Spotblender

Blending paint spray

Description

## Area of application

 For homogeneous transition zones in the blending area of 1K and 2K clear coats as well as 2K top coats

## Benefits

Very good solving ability
 No spray gun application necessary



1 6

NEW







## Plastic Primer

S.21 Plastic Primer

Description Plastic primer spray

## Area of application For all car and truck plastic parts inside

and outside Suitable for spot repairs

## Benefits

Slight silver pigmentation highlights primed areas



ArtNo.	Specification	SP	MOQ
157.759	silver-transparent / 400 ml	1	6

Specification

light grey / 400 ml

SP

Blending paint spray

## **Plastic Cleaner**

Plastic cleaner

## Description

Plastic cleaner spray

## Area of application

- For all car and truck cleaning inside and outside
- = Removes dirt, fat, oil, silicone, wax,
- tar and glue residues = Suitable for spot repairs

## Application advice

- Not an interiour cleaner
- Only for plastic surfaces prior to painting



ArtNo.	Specification	SP	MOQ
145.985	transparent / 400 ml	1	12

## **Plastic Primer**

Plastic primer

## Description

- Plastic primer spray
   Colour: Transparent

## Area of application

= For all car and truck plastic parts inside and outside Suitable for spot repairs

## Application advice

Not suitable for PE and PC



ArtNo.	Specification	SP	MOQ
145.986	transparent / 400 ml	1	12

## **HpP Primer**

1K Plastic primer



## Description

- IK Plastic primer
- Special primer
  Wet-on-wet primer for plastic parts
- Drying time: Wet-on-wet 15 min / 20°C object temperature

### Area of application

Prior to painting of solvent resistant raw plastic parts (e.g. PP, PVC, EPP, PP-EPDM)

### Benefits

Extremely time saving
No pretreatment of the plastic (cleaning with alcohol-based plastic cleaner is mandatory)

#### Application advice

- We recommend for the cleaning of plastic parts the Carsystem ISO-VE 7030 cleaner
   Not suitable for PE/PC

ArtNo.	Specification	SP	MOQ
154.706	white / 1 kg	1	12
154.707	grey / 1 kg	1	12
154.708	black / 1 kg	1	12
154.712	thinner / 1 L	1	12



## S.21 1K Primer

1K filling primer



## NEW

#### Description

IK Primer spray Filling primer

#### Area of application

#### Spot and partial paintings

- Isolating of sanded through spots
   Overpaintable with water and solvent based paints
- Overpaintable wet-on-wet

## Benefits

- Rust protection
- Primer and filler in one step Free of chromates
- Art-No Specification SP MOO

158.107	white / 400 ml	1	6
158.108	grey / 400 ml	1	6
158.109	black / 400 ml	1	6

## **1K Easy Primer**

1K Filling primer



## **1K Epoxy Primer**

1K Epoxy primer

### Description

- 1K Epoxy primer spray
  Colour: Grey

## Area of application

- Spot and partial paintings
  Isolating of sanded through spots
- Overpaintable with water and solvent based paints

#### Benefits

- Highest possible rust protection
   Perfect isolation against moisture
   UV resistant

#### Application advice

- Damaged areas on metal substrates must be thoroughly cleaned
- with silicone remover
- When used as a primer, we recommend to apply a 2K filler on top
   When used in several layers or in high layer thickness, overpainting can be done wet-on-wet with water or solvent based paints

ArtNo.	Specification	SP	MOQ
151.958	grey / 400 ml	1	12

#### Description

IK Primer spray

## Area of application

- Spot and partial paintings
  Isolating of sanded through spots
  Overpaintable with water and solvent based paints
  Overpaintable wet-on-wet

- Rust protection primer and filler in one step
- Weldable
- Free of chromate

ArtNo.	Specification	SP	MOQ
151.537	white / 400 ml	1	12
151.538	grey / 400 ml	1	12
151.539	black / 400 ml	1	12

## S.21 1K Filler

1K High build primer



## Description

- IK Acrylic filler spray
- High build primer

## Area of application

- Spot and partial paintings
  Filling small spots prior to painting
  Overpaintable with water and solvent based paints

#### Benefits

- High filling and opacity power
   Time saving compared to the use of a spray gun
   Suitable for wet and dry sanding

## Free of chromates and lead

ArtNo.	Specification	SP	MOQ
157.763	white / 400 ml	1	6
157.764	lightgrey / 400 ml	1	6

## **Replacement Spray Head**

Replacement Spray Head adjustable

#### Description

- Replacement spray head adjustable
   Suitable for:
- IK Epoxy Primer = 1K Easy Primer
- 1K Easy Filler

ArtNo.	Specification	SP	MOQ
153.793	Replacement Spray Head adjustable	1	300

## **1K Easy Filler**

1K High build primer



#### Description

= 1K Acrylic filler spray High build primer

## Area of application

Spot and partial paintings

- Filling small spots prior to painting
   Overpaintable with water and solvent based paints

## Benefits

- High filling and opacity power
  Time saving compared to the use of a spray gun
- Suitable for wet and dry sanding
- Free of chromate

	ArtNo.	Specification	SP	MOQ
	151.521	white / 400 ml	1	12
-	151.522	lightgrey / 400 ml	1	12
	151.523	black / 400 ml	1	12

## **Primer Spray**

Primer spray

## Description

- Primer spray
   Alkyd resin-based

Area of application Primer for all paint works

## Benefits

Very good rust protection properties



ArtNo.	Specification	SP	MOQ
125.949	red brown / 400 ml	1	12
132.907	grey / 400 ml	1	12



## **Primer Surfacing Spray**

Primer spray

## Description

- Primer spray
  Nitro-combi-based
  Colour: Grey

## Area of application

Primer for all paint works

## Benefits

Good rust protection properties Weather resistant



ArtNo.	Specification	SP	MOQ
126.024	grey / 400 ml	1	12

## **Etch Primer**

Primer

## Description

Rust protection spray

## Area of application

- Specific for repairing of original primers on
- aluminum car bodies Isolating of sanded trough spots
- Adhesion promoter on all steel, zinc, aluminum substrates for spot and partial paintings

- Easy to use
  Fast flash off and drying time



ArtNo.	Specification	SP	MOQ
143.028	grey / 400 ml	1	6

## **Spray Filler Spray**

Spray filler

- Description
- Spray putty aerosol
   Acrylic-based

#### Area of application

Levelling of small imperfections and isolating polyester putty layers

#### Benefits

Quickly sandable

Art.-No.

125.580

Outstanding high filling powerShort drying time



CARE -

ZIN

SP

1

MOQ

12





Area of application Rust protection for the body interior in spot welding Cold galvanizing of metal surfaces



SP

1 6

MOQ

Specification	SP	MOQ	ArtNo.	Specification
grey / 400 ml	1	12	157.761	darkgrey / 400 ml

			No. of Concession, Name
ArtNo.	Specification	SP	MOQ
149.218	black matt / 500 ml	1	6

**Rallye-Spray Premium** 

Repair of imperfections in the paint

= Paint application on new parts

**Rallye-Spray matt** 

Repair of imperfections in the paint

Paint spray – matt

Acrylic paint spray

Area of application

Description

Benefits

Fast drying

Paint spray – black matt

Description

Benefits

High opacityFast drying

Acrylic paint spray

Area of application

## Zinc Spray

Rust protection

## Description

 Rust protection spray
 Temperature resistant up to 490°C (acc. DIN50976, 53167, 50021, 53151)

Area of application

Art.-No.

126.030

Rust protection for the body interior in spot welding

Cold galvanizing of metal surfaces

Specification

grey / 400 ml

## **Rallye-Spray Premium**

Paint spray – black glossy

Description Acrylic paint spray

## Area of application

Art.-No.

149.219

Repair of imperfections in the paint Paint application on new parts

## Benefits

High opacity Fast drying
Polishable





1

6

-	
WORLD	
	100
_	

black glossy / 500 ml

ArtNo.



ArtNo.	Specification	SP	MOQ
126.027	black matt / 400 ml	1	12

## **Rallye-Spray gloss**

Paint spray – gloss

## Description

Acrylic paint spray

## Area of application

Repair of imperfections in the paint

## Benefits

- Fast dryingPolishable



ArtNo.	Specification	SP	MOQ
126.053	white glossy / 400 ml	1	12
126.026	black glossy / 400 ml	1	12

## **Thermo-Spray**

Paint spray – heat resistant

## Description

- Silicone resin based paint spray
   Temperature resistant up to 650°C

## Area of application

Protects parts in the engine compartment and exhaust pipes

## Benefits

Extremely high temperature resistance



ArtNo.	Specification	SP	MOQ
126.086	black / 400 ml	1	12
126.087	silver / 400 ml	1	12

## S.21 Silver Wheel

1K Silver wheel spray

Description Nitro combination paint spray

Area of application For painting steel and aluminium rims

## Benefits

High opacity
 Abrasion resistant

- Resistant against salt, stone chips etc.Weather resistant



Silver Wh	eel
Silver wheel spra	ау

Acrylic paint spray

Area of application

Abrasion resistantWeather resistant

For painting steel rims

Description

Benefits



ArtNo.	Specification	SP	MOQ
157.760	silver / 400 ml	1	6

ArtNo.	Specification	SP	MOQ
126.021	silver / 400 ml	1	12

## **Bumper Paint Spray**

Bumper spray

Description Acrylic paint spray

Area of application Repairs and renewals of old, faded out or damaged plastic parts

#### Benefits

No plastic primer needed No spray gun application necessary

Application advice

Usable on PP, PP/EPDM, ABS

	CAR
	~
BUMPE	R PAIN
The second	
	-
	1000

ArtNo.	Specification	SP	MOQ
142.820	grey / 400 ml	1	6
142.821	black / 400 ml	1	6

## S.21 1K Clear Coat

1K Spot repair clear coat

Description

IK Clear coat spray

Area of application

Especially suitable for spot repair

#### Benefits

Fast drving Polishable

Art.-No.

157.758

Free of heavy metals (no lead, cadmium, chrome)

## **Clear Coat Spray** Paint spray - transparent



Area of application

Benefits

Fast drying and polishable



ArtNo.	Specification	SP	MOQ
126.025	transparent glossy / 400 ml	1	12



Structurant paint for plastics

## Description

Acrylic structurant paint

Area of application Repairs and renewals of old, faded out or damaged plastic parts = Re-forms the structure close to

#### Benefits

the original

No plastic primer needed Can be applied directly to the plastic without prior priming



ArtNo.	Specification	SP	MOQ
147.447	black / 1.0 l	1	12

Specification

transparent – glossy / 400 ml

S.21

MOQ

6

SP

1

Description Spot repair

## **Bumper Structurant Spray**

Bumper structurant spray black

## Description

Acrylic structurant paint spray

#### Area of application

- Repairs and renewals of old, faded out
- or damaged plastic parts Re-forms the structure close to the original

## Benefits

- No plastic primer needed
   No spray gun application necessary



ArtNo.	Specification	SP	MOQ
142.982	black / 400 ml	1	12

## **Prefill-Spray**

Aerosol tin - fillable

## Description

- Pre-fill paint spray
   Filled with 275 ml propellant, solvent and additives
- To be filled with 100 ml paint

### Area of application

= Fillable with solvent based paint

#### Benefits

Replaces a spray gun in spot repairs

#### Application advice

Filling machine required



ArtNo.	Specification	SP	MOQ
125.686	without pin / 275 ml	1	12

## **Prefill-Spray Water**

Aerosol tin – fillable

## Description

- Pre-fill paint spray
   Filled with 300 ml propellant,
- solvent and additives To be filled with 100 ml paint

Area of application

## Fillable with water based paint

Benefits

Replaces a spray gun in spot repairs

## Application advice

Filling machine required

ArtNo.	Specification	SP	MOQ
140.608	without pin / 300 ml	1	12

Specification

200 pcs. per box / white

200 pcs. per box / dark grey

## Spray Head

Description

Suitable for:

CAR

-

PREFIL SPRA

Replacement spray head red

Replacement spray head red

Prefill Spray
Prefill Spray Water



ArtNo.	Specification	SP	MOQ
145.840	spray nozzle spare part / red	1	100

## **Spray Out Cards Metall**

Colour match card

Description

Colour match cards metal

Area of application Colour matching

Art.-No.

153,758

153.759



1

# Colour match card

**Color Match Card Paper** 

Description Colour matching card
 Paper based kit with 250 pcs. incl. holder



Colour matching Disposable cards

## Application advice

Area of application

Not suitable for water-based paint
 Control of opacity

of of opacity			
'tNo.	Specification	SP	MOQ
41.109	70 × 179 mm	1	24

SP	MOQ	ArtNo.	Specification
1	5	141.109	70 × 179 mm
1	5		



Paint bottle – fillable 20ml

## Description

- Plastic based paint bottle with a brush
- Including mixing ball made of stainless steel

## Area of application

Can be filled with paint Repairing of stone chips and scratches in the surface

Benefits

## ■ IInbroakablo

UIID	reaka	able

ArtNo.	Specification	SP	MOQ
150.764	transparent / 20 ml × 100 pcs.	1	1

## **Touch Up**

## Paint bottle - fillable 50ml

- Description
- Plastic based paint bottle with a brush Including mixing ball made of glass

## Area of application

Can be filled with paint
Repairing of stone chips and scratches in the surface

## Benefits

Unbreakable

ArtNo.	Specification	SP	MOQ
150.769	transparent / 50 ml × 25 pcs.	1	1



Specification	SP	MOQ
spray nozzle spare part / red	1	100

## **Magnetic Gun Holder**

Paint gun holder

## Description Magnetic paint gun holder

## Area of application

Holder for paint guns Can be fixed on ferromagnetic metallic surfaces



ArtNo.	Specification	SP	MOQ
140.145	Magnetic Gun Holder	1	5

**Dust Needle** Dust needle

Description

Dust needleContent: 10 pcs.

Inclusive holder

Area of application For removing particles or lints from resh painted surfaces

ArtNo.	Specification	SP	MOQ
140.971	Set	1	10
140.972	needles in blister / 10 pcs.	10	5000

## **Brush Set** Set of brushes

Description Set of small brushes Content: 3 sizes / 12 pcs. per size = No. 4 / No. 6 / No. 8



Area of application

= For repairing imperfections, stone chips etc.

ArtNo.	Specification	SP	MOQ
140.970	Set	1	10



ArtNo.	Specification	SP	MOQ
138.680	bag with 10 pcs.	10	10

## **Paint Arrestor**

SATA gravity flow cup

Paint mist separator

## Description

- Paint mist separator
   Glass fibre basis with
- elastic fibre structure Temperature resistant up to 100°C

### Area of application

- Paint filter for paint booths
- Separation of paint mist

ArtNo.	Specification	SP	MOQ
142.891	500 mm × 20 m 3"	1	1
142.894	500 mm × 91 m 3"	1	1
142.898	660 mm × 20 m 3"	1	1
142.901	760 mm × 20 m 3"	1	1
142.902	760 mm × 25 m 3"	1	1
142.903	760 mm × 91 m 3"	1	1
142.906	860 mm × 91 m 3"	1	1
142.910	1000 mm × 20 m 3"	1	1
142.911	1000 mm × 25 m 3"	1	1
142.912	1000 mm × 50 m 3"	1	1
142.913	1000 mm × 91 m 3"	1	1
142.917	1250 mm × 91 m 3"	1	1
142.919	1530 mm × 25 m 3"	1	1



## **Micro Tip**

Repair tip

Description Micro repair sticks with a felt head

Area of application For filling stone chips, silicone inclusions and scratches

Application advice Perfectly suitable with the UV Clear

ArtNo.	Specification	SP	MOQ
140.976	box with 100 pcs.	1	1

## Air hose

Air hose coil

## Description

- Antistatic rubber air hose

- Antistate robber air hose
  Size: 9 × 16 mm
  Lentgh: 50 m
  Max. Air pressure: 12 bar
  Inner tube: Smooth EPDM black
  Outer tube: Smooth EPDM blue

#### Area of application

Air supply for spray guns and air driven tools

ArtNo.	Specification	SP	MOQ
143.131	9 × 16 mm / 50 m length	50	50

## Air hose Air hose complete

## Description

- Antistatic rubber air hose incl.
- nipple and safety coupling = Size: 9 × 16 mm
- Lentgh: 12,5 m
- Lenigh: 12,5 m
   Max. air pressure: 12 bar
   Inner tube: Smooth EPDM black
- = Outer tube: Smooth EPDM blue

## Area of application

Air supply for spray guns and air driven tools



**Safety Coupling** 

Safety coupling with quick connector

Description Air savety coupling for quick connectors



ArtNo.	Specification	SP	MOQ
143.128	Ø 6 mm	1	1
143.127	Ø 9 mm	1	1

Nippel
Nipple for quick connector
Description

Air connection nipple for quick connectors



ArtNo.	Specification	SP	MOQ
143.130	Ø 6 mm	1	1
143.129	Ø 9 mm	1	10

Nippel Nipple with outer thread	
Description = Air supply nipple with conic, outer thread = Teflon coated	Carthand Mills

ArtNo.	Specification	SP	MOQ
139.033	1/4 "	1	10

**MS Coupling** 

MS Coupling

Description MS Coupling



ArtNo.	Specification	SP	MOQ
139.036	Ø 9 mm	1	1

## Nippel

Nipple with inner thread

## Description

Air supply nipple with inner tread



ArtNo.	Specification	SP	MOQ
139.034	1/4 "	1	10

# FINISH QUADRA PAD C-WAX C-80 POLISH-FINE STEP 2 POLISH C-30 FINISH LAMBSWOOL RUPES POLISHING MACHINE POLISH C-10 STRONG MICRO FIBER CLOTH PAINT FINISH POLISH C-05 CUT REFINISH POLISH FOAM FINISH CONTROL FOAM C-99 FINISH WAFFLE FOAM FINISH BACK PAD NANO CARNAUBA WAX POLISH C-07 CUT POLISH-COARSE STEP 1 POLISH WAFFLE FOAM FINISH FOAM



## OUR RECOMMENDATION FOR A PERFECT POLISHINGSYSTEM

## SYSTEM #1

Our **POLISHING SYSTEM #1** provides an extremely strong and aggressive first polishing step with our Polish C-05 Cut to directly remove imperfections and sanded areas on fresh and old paint surfaces.

Our Polish C-30 Finish presents an easy to use second polishing step to remove small scratches and holograms

step using our Wax Puck or our microfiber towels

C-Wax C-80 gives a strong protection, additional gloss and extremely smooth surface with lotus effect.

## STEP 1

## 156.345 - Polish C-05 Cut 157.051 - Polish Foam Green 156.588 - Microfiber Wave Cut

We recommend the Polish C-05 cut and the Polish Foam Green for fresh and old paint.

The Polish C-05 Cut is an extra strong, high performance compound and provides an extremely fast removal of imperfections, deep scratches and sanded areas.

The Polish C-05 Cut cut is our most aggressive / fastest compound and has a pasty appearance.

On light colors like white or silver the Polish C-05 Cut cut works as a 1-step-compound, a second polishing step is not necessary.

## 151.639 - Finish Sandwich Pad C-30 156.589 - Microfiber 2/N1

We recommend our Polish C-30 Finish and in connection with the Finish Sandwich Pad C-30 for any painted surface. The Polish

C-30 Finish is a very fine anti-hologram compound and provides

We recommend our Polish C-30 Finish + Finish Sandwich Pad C-30 on all dark colors or scratch/hologram sensitive colors.

## SYSTEM #2

Our **POLISHING SYSTEM #2** provides a strong and aggressive first polishing step with our Polish C-07 Cut fresh and old paint surfaces

Our Polish C-30 Finish presents an easy to use second

step using our Wax Puck or our microfiber towels

C-Wax C-80 gives a strong protection, additional gloss and an extremely smooth surface with lotus effect.

## STEP 1

157.445 - Polish C-07 Cut 157.057 - Polish Foam Yellow 157.059 - Polish Waffle Foam Yellow 156.587 - Microfiber Sky Blue

Our Polish C-07 Cut and Polishing Foam Yellow is suitable for very fresh, old and sensitive paint.

The Polish C-07 Cut is a strong high performance compound and provides a fast removal of scratches and sanded areas in combination with our Polish Foam Yellow.

The Polish C-07 Cut is more liquid compare to the Polish C-05 Cut and is suitable for long lasting polishing sessions.

On light colors like white or silver, the Polish C-07 Cut cut works as a 1-step-compound, a second polishing step is not necessary.

## SYSTEM #3

Our **POLISHING SYSTEM #3** provides a fast and aggressive first polishing step with our Polish C-10 Strong to remove imperfections and sanded areas on very fresh and old paint surfaces.

Our Polish C-30 Finish presents an easy to use second polishing step to remove small scratches and holograms

step using our Wax Puck or our microfiber towels

C-Wax C-80 gives a strong protection, additional gloss and an extremely smooth surface with lotus effect.

## STEP 1

151.634 - Polish C-10 Strong 151.640 - Finish Quadra Pad C-10 156.588 - Microfiber Wave Cut

Our Polish C-10 Strong and Finish Quadra Pad C-10 is suitable for very fresh paint.

The Polish C-10 Strong is a durable high performance compound and provides a fast removal of scratches and sanded areas with our Finish Quadra Pad C-10.

Our Polish C-10 Strong is very liquid and suitable for long lasting and gentle polishing sessions.

On light colors like white or silver the Polish C-10 Strong works as a 1-step-compound, a second polishing step is not necessary.



## STEP 2

# 151.636 - Polish C-30 Finish

an easy and safe removal of fine scratches and holograms. Our Polish C-30 Finish achieves a smooth surface that deep gloss.

## STEP 2

## 151.636 - Polish C-30 Finish 157.067 - Finish Waffle Foam Black AH 157.065 - Finish Foam Black AH 156.590 - Microfiber Fluffy

We recommend our Polish C-30 Finish and

in connection with the Finish Waffle Foam Black AH or Finish Foam Black AH for any painted surface. The Polish C-30 Finish is a very fine anti-hologram compound and provides an easy and safe removal of fine scratches and holograms. Our Polish C-30 Finish presents a smooth surface that deep gloss.

We recommend our Polish C-30 Finish + Finish Waffle Foam Black AH or Finish Foam Black AH on all dark colors or scratch / hologram sensitive colors

## STEP 2

## 151.636 - Polish C-30 Finish 157.053 - Finish Foam White AH 151.639 - Finish Sandwich Pad C-30 156.589 - Microfiber 2IN1

We recommend our Polish C-30 Finish and in connection with the Finish Foam White AH or

Finish Sandwich Pad C-30 for any painted surface. The Polish C-30 Finish is a very fine anti-hologram compound and provides an easy and safe removal of fine scratches and holograms. Our Polish C-30 Finish presents a smooth surface that deep gloss.

We recommend our Polish C-30 Finish + Finish Foam White AH or Finish Sandwich Pad C-30 on all dark colors or scratch / hologram sensitive colors.

## **Paint Finish**

## STEP 3 optional

158.243 - C-Wax C-80 152.565 - Wax Puck 156.591 - Microfiber Polish Extreme

Our CS C-Wax C-80 suits for all painted and glossy surfaces


This high gloss sealant protects the surface against weather influences, fingerprints and water stains.

The CS C-Wax C-80 provides an extreme smooth surface. increases the gloss level and a long-lasting roll off effect.

Our CS C-Wax C-80 is an optional use after all polishing work.

## STEP 3 optional

158.243 - C-Wax C-80 152.565 - Wax Puck 156.591 - Microfiber Polish Extreme



This high gloss sealant protects the surface against weather influences, fingerprints and water stains.

The CS C-Wax C-80 provides an extreme smooth surface, increases the gloss level and a long-lasting roll off effect.

Our CS C-Wax C-80 is an optional use after all polishing work.

## STEP 3 optional

158.243 - C-Wax C-80 152.565 - Wax Puck 156.591 - Microfiber Polish Extreme

Our CS C-Wax C-80 suits for all painted and glossy surfaces.

This high gloss sealant protects the surface against weather influences, fingerprints and water stains.

The CS C-Wax C-80 provides an extreme smooth surface, increases the gloss level and a long-lasting roll off effect.

Our CS C-Wax C-80 is an optional use after all polishing work.





## Polish C-05 cut

High performance grinding polish

**Paint Finish** 



## Description

- High performance grinding polish
- Water-based Free of silicones

## Area of application

= Extremely fast removal of defects on fresh and completely hardened top coats Especially developed for fresh and used paint surfaces

#### Benefits

Extremely high grinding performanceGood deep shine

## Application advice

- We recommend using the Carsystem Polish Foam Green
- We recommend using the Carsystem C-30 subsequently on dark paints

ArtNo.	Specification	SP	MOQ
156.345	green / 1 kg	1	6

## Polish C-10 strong

### High performance grinding polish



## Polish C-07 cut

High performance grinding polish



## Description

- High-performance grinding polish
- Water-based
  Free of silicones

## Area of application

- Very fast removal of defects on fresh and completely hardened top coats
   Especially developed for fresh and used paint surfaces

#### Benefits

Very high grinding performanceVery good deep shine

## Application advice

We recommend using the Carsystem Polish Foam Yellow

ArtNo.	Specification	SP	MOQ
157.445	yellow / 1 kg	1	6



Polish C-30 finish

Anti hologram polish



#### Description

- High performance grinding polish
- Water-based Free of silicones

## Area of application

- Fast removal of imperfections in fresh and completely hardened top coats
- Especially developed for fresh and used paint surfaces

## Benefits

- High grinding performance
- Extremely good deep shine
   Polishing on a low temperature level

## Application advice

We recommend using of Carsystem Finish Quadra Pad C10

ArtNo.	Specification	SP	MOQ
151.634	white / 1 kg	1	6

#### Description

- Anti hologram polish
- Water-based
- Free of silicone

#### Area of application

- Removal of finest scratches, swirl marks and holograms on dark paints
- Perfekt the last finishing step

## Benefits

- Very effective removal of holograms without streaks
   Perfect deep shine
- Low dusting
  Good material displacement

#### Application advice

- We recommend the using with Carsystem Finish Foam White AH, Finish Sandwich Pad C-30 or Finish Foam Black AH

ArtNo.	Specification	SP	MOQ
151.636	grey / 1 kg	1	6



## C-Wax C-80

High gloss finish sealer



## Description

Water-based high gloss finish sealer

## Area of application

- Sealing of painted surfaces
   Protects the paint from weathering, fingerprints and slight mechanical damage
   Perfectly suitable as assembly protection in

- Industry or car dealerships
   Can be applied by hand or machine

#### Benefits

- Very good resistance to alkaline cleaners and environmental influences
   Extremely smooth surface

- Long-lasting protectionBrilliant deep shine
- Very quick and easy to use

## Application advice

We recommend using the Carsystem Wax Puck

ArtNo.	Specification	SP	MOQ
158.243	500 g	1	10

## **Finish Control Foam C-99** Control Foam



## Description

- Micro Foam-Spray
- Water-based
   Free of silicones

### Area of application

For checking and cleaning between the polishing steps

#### Benefits

- Removes oily and waxy residues
   Makes any remaining sanding marks visible

## Application advice

Finish Control Foam C-99 should be removed with a microfiber cloth after a short exposure time.

ArtNo.	Specification	SP	MOQ
156.614	white / 400 ml	1	12

# **Paint Finish**

## Nano Carnauba Wax

## High gloss wax



#### Description

- High gloss wax with nano technologyWater-based

#### Area of application Sealing of paint surfaces

Protects the paint from weathering

#### Benefits

Dirt repellent Provides a deep, mirror-like shine

#### Application advice

■ We recommend the application with the Carsystem Wax Puck

ArtNo.	Specification	SP	MOQ
151.945	yellow / 1,0 l	1	6

## Polish-coarse step 1 Polish



## **Refinish 1**

Grinding polish

## Description

Grinding polish
 Free of silicones

#### Area of application

Removal of scratches, dust inclusions and orange peel from fresh and old paints = Especially suitable for faded and old paint surfaces

## **Refinish Restorer**

Plastic conditioner

## Description

DALES .

REFINISH

Anton Bell mill Woldshame

- Plastic conditioner
   Air drying natural oil
   Free of silicones

### Area of application

- For refurbishing faded plastic and metallic surfaces (e.g. aluminum, chrome, stainless steel, non ferrous metals)
- For removeing polishing splashes from plastics

Benefits

Infiltrates deep into surfaces

## Application advice

Only for exterior use. The product shall be testet first before application on white surfaces





Polish-fine step 2

Anti-hologram polish

ArtNo.	Specification	SP	MOQ
132.437	880 ml	1	12

ArtNo.	Specification	SP	MOQ
151.070	yellowish-transparent / 250 ml	1	12
151.071	yellowish-transparent / 1,0 l	1	6

#### Description

- High performance cutting compound
   Water-based
- Free of silicone
- Area of application
- Fast removal of imperfections in fresh top coats
- For industrial and detailling sector
   Focusses on a one step process

#### Benefits

- High grinding performance
   Very good deep shine
- Polishing on a low temperature levelWall dispenser available

### Application advice

We recommend using the Carsystem Lambwool Pad white S / Edge or Polish Foam Yellow

ArtNo.	Specification	SP	MOQ
156.451	Polish Step 1 coarse / 5 kg	1	4

## Description

- Anti-hologram polish
- Water-based
- Free of silicone

#### Area of application

- Removal the finest scratches, squirl marks and holograms in dark paint
   Perfekt as last finishing step after Polish Step 1

## Benefits

- Very effective removal of holograms without streaks
   Perfect deep shine
- Low dusting
- Good material displacement Wall dispenser available

## Application advice

We recommend using the Carsystem Finish Waffle Foam Black

ArtNo.	Specification	SP	MOQ
156.452	Polish Step 2 fine / 5 kg	1	4

# **Paint Finish**

## **Dispenser for 5 kg Polish** Wall Bracket for 5 kg Polish Wall Bracket Dispenser Description Description Milking dispenser for 5 kg polishes Wall bracket for 5 kg polishes Art.-No. Specification SP MOQ Art.-No. Specification SP MOQ

#### 156.461 Wall Bracket for 5 kg Polish 1 1 1 1

## **RUPES 47.105 Replacement carbon brush**

Replacement carbon brush



ArtNo.	Specification	SP	MOQ
158.290	10 pcs pack	1	1

## **Dispenser bottle** incl. Cap Dispenser bottle

Description

156.460

Dispenser bottle incl.

cap for polishes = 250 ml

## Benefits

Perfect dosage of the amount of polish compound = Low weight = Perfect handling

ArtNo.	Specification	SP	MOQ
156.575	Dispenser bottle incl. cap	1	1

SYSTEM

~

NIN W

Dispenser for 5 kg polish

## **Rupes 9. Holder BigFoot**

Wall racket

## Description

Wall racket for BigFoot polishing machines
 Dimensions: 32 cm × 20,5 cm

## Area of application

Functional wall racket of BigFoot polishing machines

## Benefits

Art.-No.

158.134

Special hooks for holding up to 9 m of Rounded corners and edges to protect user and machine

Specification

black / 32  $\times$  20.5 cm



SP

1

MOQ

1

NEW

Finish Back Pad M-14 Finish back pad



## **Finish Back Pad**

Finish back pad

## Description

- Finish back pad for
- polishing pads Thread: M14



ArtNo.	Specification	SP	MOQ
139.206	128 mm	1	10
139.207	73 mm	1	10

## Description

- Finish Back Pad for polishing pads with Velcro<sup>®</sup>
- Extra thick foam pad
   Degree of hardness: Soft
- Thread: M-14

- Adapts perfectly to uneven surfaces
   Distributes the press on the surface more evenly

ArtNo.	Specification	SP	MOQ
157.721	123 mm	1	1

## **RUPES Angle Polishing Machine LH16ES**

Angle polishing machine, electric



## Description

- Electric angle polishing machine
- Rotating
   Max. Velcro<sup>®</sup> back pad: 200 mm
   Adjustable speed up to 1.700 rpm.
- Thread: M14-M



## **RUPES Angle Polishing Machine LH76P**

Angle polishing machine, pneumatic



## **RUPES Polishing Machine LHR75**

Polishing machine, pneumatic



**RUPES Polishing Machine LH19E** 

Polishing machine, Bigfoot

## Description

- Electric Polishing machine
- Rotating
   Ø Velcro® back pad: 125 165 mm
   Adjustable speed up to 1.700 rpm.
   Thread: M14

ArtNo.	Specification	SP	MOQ
157.322	LH19E	1	1
157.640	polishing back pad M14	1	1



## **RUPES Polishing Machine LHR15III/STD**

Polishing machine, electric, Bigfoot



## Description

- Electric Random Orbital Polishing machine
- 15 mm orbit diameter
   Velcro<sup>®</sup> back pad: 125 mm
- Adjustable speed up to 5.200 rpm.
   Thread: M8-F

ArtNo.	Specification	SP	MOQ
157.323	LHR15III/STD	1	1
157.641	polishing back pad 125 mm	1	1

## **RUPES Polishing Machine LHR75E**

Polishing machine Bigfoot, electric



### Description

- Pneumatic Polishing Machine
  Velcro® back pad: 75 mm
  Adjustable speed up to 5.000 rpm.
  Thread: 3/8"

ArtNo.	Specification	SP	MOQ
157.331	LH76P	1	1

## Description

- Pneumatic Mini Random Orbital Polishing Machine
- 15 mm orbit diameter
  Ø Velcro® back pad: 75 mm
  Adjustable speed up to 11.000 rpm.

ArtNo.	Specification	SP	MOQ
157.332	LHR75	1	1
157.642	polishing back pad M6 / 75 mm	1	1

#### Description

- Electric Mini Random Orbital Polishing Machine
- Orbital12 mm orbital diameter
- Backing pad: 75 mm
   Connection: M6
- Speed adjustable up to 5.500 U/min. Thread: M6 receptacle

ArtNo.	Specification	SP	MOQ
157.340	LHR75E / 75 mm	1	1

# **Paint Finish**

## **Polishing Machine RC 166**

Polishing machine, pneumatic

## Description

- Pneumatic polishing machine
- Incl. back pad Adjustable speed up to 2.500 rpm.
- Thread: 1/4 inch

Art.-No.

143.723



SP

1

MOQ

1

SIE

Specification

Mini Polishing Machine RC 166

incl. polishing back pad

Polishing	Back Pad
Finish back pad	

## Description

Replacement back pad for Polishing Machine RC166 Thread: M6 (fixed screw)



ArtNo.	Specification	SP	MOQ
144.916	M6 / 77 mm	1	1

## **Polish Foam Yellow**

Polishing pad



= For processing of grinding polishes

## Application advice

We recommends using the Polish Foam Yellow with the Carsystem Polish C-07 Cut

ArtNo.	Specification	SP	MOQ
157.056	85 mm	2	200
157.057	145 mm	2	100

## **Polish Foam White SC**

Polishing pad

## Description

Polish foam pad Hardness: hard

Area of application For processing of grinding polishes

## Application advice

We recommends using the Polish Foam White SC in

combination with all common abrasive polishes

ArtNo.	Specification	SP	MOQ
157.054	85 mm	2	200
157.055	145 mm	2	100

## **Polish Foam Green**

Polishing pad

## Description

Polish foam pad Hardness: hard

## Area of application

For processing of grinding polishes

## Application advice

We recommends using the Polish Foam Green with the Carsystem Polish C-05 Cut

ArtNo.	Specification	SP	MOQ
157.050	85 mm	2	200
157.051	145 mm	2	100

## **Finish Quadra Pad C10**

Polishing pad

## Description

Finish foam pad

- Hardness: hard
- Cross cut
   Double layer construction

## Area of application

For processing of grinding polishes

#### Benefits

- Double layer construction supports the foam
- and provides a consistent performance Spider cut for more aggressivity

## Application advice

We recommend using the Carsystem Polish C-10 strong

ArtNo.	Specification	SP	MOQ
151.906	85 mm	4	4
151.640	145 mm	1	1
151.905	160 mm	1	1

SYSTEM

## **Polish Waffle Foam Yellow**

Polishing pad

## Description

Polish Waffle Foam

Hardness: medium

## Area of application

For processing of grinding polishes

## Application advice

We recommends using the Polish Foam Yellow with the Carsystem Polish C-07 Cut

ArtNo.	Specification	SP	MOQ
157.058	85 mm	2	200
157.059	145 mm	2	100

## **Finish Sandwich Pad C30**

Polishing pad

## Description

- Finish foam pad
- Hardness: Medium
- Double layer construction

### Area of application

For processing of fine and anti-hologram polishes

#### Benefits

Double layer construction supports the foam and provides a consistent performance

#### Application advice

We recommend using the Carsystem Polish C-30 finish

ArtNo.	Specification	SP	MOQ
151.908	85 mm	4	4
151.639	145 mm	1	1

# **Paint Finish**

## **Finish Foam White AH**

Polishing Pad

Description

Finish Foam Pad

Hardness: soft



Area of application For processing of fine & anti-hologram-polishes and waxes

## Application advice

We recommends using the Polish Foam White AH with the Carsystem Polish C-30 Finish

ArtNo.	Specification	SP	MOQ
157.052	85 mm	2	200
157.053	145 mm	2	100

## **Finish Foam Black AH**

Polishing pad Description



Area of application For processing of fine & anti-hologram-polishes and waxes

#### Application advice

■ We recommends using the Finish Foam Black AH in combination with all common fine  $\overset{\circ}{k}$  anti-hologram-polishes and waxes

ArtNo.	Specification	SP	MOQ
157.064	85 mm	2	200
157.065	145 mm	2	100

## **Finish Waffle Pad orange**

Polishing pad

Polish waffle foam pad

Hardness: Medium

Description



Area of application = For processing of grinding polishes

#### Benefits

Waffle form reduces the temperature level

ArtNo.	Specification	SP	MOQ
153.114	135 × 25 mm	2	100

## **Finish Waffle Foam Black AH**

polishing pad

## Description Finish Waffle Foam

Hardness: Soft

Area of application For processing of fine & anti-hologram-polishes and waxes

#### Application advice

We recommends using the Finish Foam Black AH in combination with all common fine & anti-hologram-polishes and waxes

ArtNo.	Specification	SP	MOQ
157.066	85 mm	2	200
157.067	145 mm	2	100

## **Finish Foam orange**

Polishing pad

## Description

Polish foam pad Hardness: Medium Area of application

For processing of grinding polishes

ArtNo.	Specification	SP	MOQ
153.088	85 × 25 mm	2	100
153.076	145 × 25 mm	1	100

## **Car Mop yellow**

Polishing pad

## Description

Finish foam pad Hardness: Ultra soft

## Area of application

For processing of fine and anti-hologram polishes

#### Benefits

Provides very high gloss especially on dark colours
 Highly flexible

ArtNo.	Specification	SP	MOQ
137.798	75 × 20 mm	6	60

## **Car Mop white**

Polishing pad

## Description

Polish foam pad Hardness: Hard

## Area of application

For processing of grinding polishes

## Application advice

We recommend using the Car Mop white with Refinish 1

ArtNo.	Specification	SP	MOQ
133.149	150 × 50 mm	1	10



Lambswool Pad

## Description

= 100% Lambswool

Soft backpad


#### Area of application

For processing of grinding polishes

- Highest quality offers extremely long durability
- Polishing on a low temperature level
  High cutting power for an efficient removal of sanding marks

ArtNo.	Specification	SP	MOQ
157.159	80 × 17 mm	1	10
157.629	130 × 21 mm	1	10



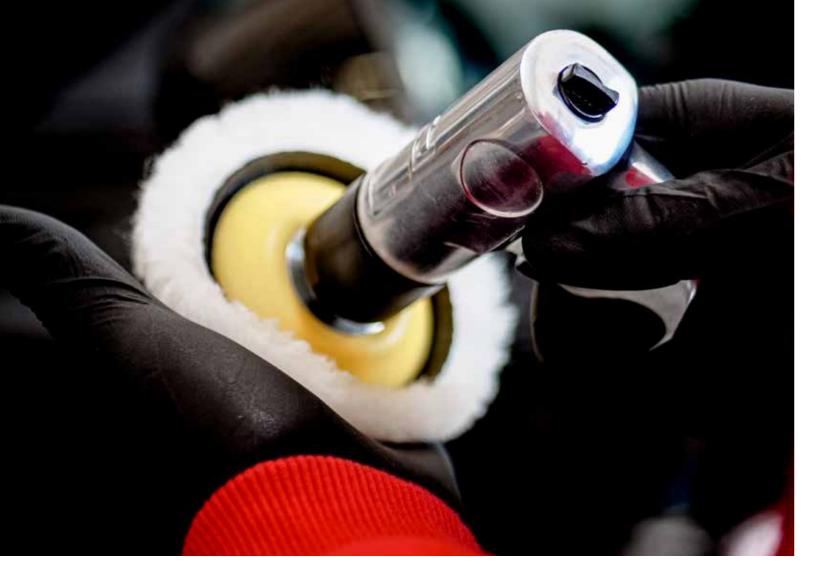

## Lammfell White S Edge

Lambswool Pad



## Description

- 100% Premium lambswool
  Protective armour due to turned-in edge
  The turned-in edge forms an edging on the backside which fixes the backpad perfectly

## Area of application

Designed for polishing strong curves, narrow edges and hard-to-reach areas, e. g. entrance areas, window frames, roof pillars

## Benefits

- Protects surrounding parts from damage

- Easy polishing also in hard-to-reach areas
   Very fast removal of scratches
   Highest quality offers extremely long durability

ArtNo.	Specification	SP	MOQ
157.232	130 × 25 mm	1	10
157.163	80 × 17 mm	1	10

## NEW Lambswool Pad gold S Lambswool pad Description = 100% lambswool = Soft backpad Area of application

For processing of grinding polishes

#### Benefits

- Highest quality offers extremely long durability
- Polishing on a low temperature level
  Very high cutting power for an efficient removal of sanding marks

ArtNo.	Specification	SP	MOQ
157.166	80 × 17 mm	1	10
157.290	150 × 17 mm	1	10

## **Car Polish Roll**

Disposable polishing cloth

#### Description

- Disposable polishing cloth
   Dispenser with 370 tear-offs
   Perforated
   Size: 36 × 40 cm

## Area of application

Cleaning and degreasing of surfaces

## Benefits

- Extremely soft Free of lintsTear resistant
- Highly absorbent

ArtNo.	Specification	SP	MOQ
134.582	370 tear-off / 36 × 40 cm	1	1

## Wax Puck

Application foam

## Description

Polyurethane foam

## Area of application

Effective application of polishes and waxes

## Benefits

Ergonomic handle

ArtNo.	Specification	SP	MOQ
152.565	128 - 130 mm	1	1



## Car Pad black

Finish Back Pad

## Description

- Star

SH ROLL

- Finish back pad for 75 mm
- Prinsi back pau polishing pads
   Velcro<sup>®</sup>
   Bolt: 6 mm



ArtNo.	Specification	SP	MOQ
133.147	black / 75 mm	1	10

# 148 Paint Finish



## Micro fiber cloth

## Sky Blue

- Description
- Micro fiber cloth 40 × 40 cm
- a Note the cloth 40 × 40 clin
  a 260 g/m<sup>2</sup>
  a 80 % polyester / 20 % polyamide
  a With ultrasonic cut

Area of application For all common cleaning works

## Benefits

## The edges do not scratch

## Application advice

Washable up to 30°C no detergents

ArtNo.	Specification	SP	MOQ
156.587	$260 \text{ g/m}^2 / 40 \times 40 \text{ cm}$	5	360

## **Micro fiber cloth**

Wave Cut

## Description

- Micro fiber cloth 40 × 40 cm
- a 300 g/m<sup>2</sup>
  a 80 % polyester / 20 % polyamide
  a With ultrasonic cut

## Area of application

Perfect for sharp edged panels For all common cleaning works

## Benefits

Universal micro fiber cloth The edges do not scratch

## Application advice

Washable up to 30°C no detergents

ArtNo.	Specification	SP	MOQ
156.588	$300 \text{ g/m}^2 / 40 \times 40 \text{ cm}$	5	300





## Micro fiber cloth

## 2 IN 1

#### Description

- Micro fiber cloth 40 × 40 cm
  380 g/m<sup>2</sup>
- 80 % polyester / 20 % polyamide
  With ultrasonic cut

## Area of application

For all common cleaning works

#### Benefits

- Two different sides (short fibres / long fibres)
- Flexible useThe edges do not scratch

## Application advice

Washable up to 30°C no detergents





## Micro fiber cloth

## Fluffy

- Description
- Micro fiber cloth 40 × 40 cm
- Store and the store of the store of

## Area of application

High absorption of polishes, waxes and dust
 "Final cloth", extremely gentle on the surface

## Benefits

- Very long and soft fibresPerfect absorption
- The edges do not scratch

## Application advice

Washable up to 30°C no detergents

ArtNo.	Specification	SP	MOQ
156.590	$500 \text{ g/m}^2 / 40 \times 40 \text{ cm}$	2	180





## - Paint Finish

# 149



## **Micro fiber cloth**

Polish Extreme

### Description

- Micro fiber cloth 40 × 40 cm
- 800 g/m<sup>2</sup>
   80 % polyester / 20 % polyamide

## Corded edges

## Area of application

- Polishing cloth
- High absorption of polishes and waxes

## Benefits

- Extremely high absorption
  Very gentle on the surface
  The edges do not scratch

## Application advice

Washable up to 30°C no detergents

ArtNo.	Specification	SP	MOQ
156.591	$800 \text{ g/m}^2 / 40 \times 40 \text{ cm}$	1	100



POURT

A BKTILLE

# STONE CHIP PROTECTION BONDING B SEALING STEEL BOND UNIFLEX TAPES SOUND DEADENING PANELS POWER MIX APPLICATOR

Bonding and sealing compound

**Bonding & Sealing** 

Specification

white / 310 ml

grey / 310 ml

black / 310 ml

- Description
- Bonding and sealing compound Polyurethane

## Area of application

Elastic bonding of GRP and metal

Sealing of seams, joints and fittings

## Benefits

- Fast drying High UV resistance (no discoloration)
- Overpaintable

Art.-No.

148.923

148.925

148.924



UNIFLEX

MOQ

12

12

12

**F** 

CAR

-

UNIFLEX

GL

SP

1

1

1

## Description

Spray- and brushable seam sealer = Poly-oxy-propylene (POP) copolymer

### Area of application

Seam sealing for overlapping panels and welded seams in original structure e.g. vehicle and carbody repair, container construction, metal construction, ventilation engineering and air-condition technology

Specification

beige / 310 ml

grey / 290 ml

black / 310 ml

## Benefits

Fast drying Stone chip protection

#### Application advice

Art.-No.

135.119

148.926

135.706

Keep UNIFLEX-MS away from fresh, not finally hardened PU material



MOQ

12

12

12

SP

1

1

1

## **UNIFLEX Glas Fast-Cleaner**

Glass cleaner + activator

#### Description

## Glass cleaner and activator

## Area of application

Application for a perfectly clean surface = Surface cleaner for Carsystem Uniflex Glas and Glas HM

## Application advice

- Application with a lint-free cloth
- Drying time: 1 2 min. Close bottle immediately after use (sensitive to moisture)



tNo.	Specification	SP	MOQ
1.035	clear / 30 ml	1	25
	4.035	4.035 clear / 30 ml	4.035 clear / 30 ml 1

## **UNIFLEX Glas**

Glass bonding glue

## Description

- Glass bonding glue
- IK Polyurethane FMVSS 212 tested

Area of application

For glueing front, side and rear windows

## Application advice

- Holding time: 2 hours (23°C and 50 % rel. humidity) for cars with driver and co-driver airbags.
- Processing temperature: 5°C to 40°C

## **UNIFLEX Glas HM**

Glass bonding glue - High modulus - non-conductive

## Description

Glass bonding glue

- IK Polyurethane

## Area of application

For glueing front, side and rear windows

## Benefits

- Fast drying
- High modulus glue (high stiffness)
   Applicable for vehicles with integrated antenna

## Application advice

Art.-No.

148.928

Holding time: 30 min (23°C and 50 % rel. humidity) for cars with driver and co-driver airbags



black / 310 ml



## **Applicator**

Applicator

#### Description

Special applicator tool for liquid primers

Area of application For the application of Carsystem UNIFLEX Glas Fast-Primer



ArtNo.	Specification	SP	MOQ
139.325	Applicator	1	100

ArtNo.	Specification	SP	MOQ
148.927	black / 310 ml	1	12

1

12



## **UNIFLEX Glas Fast-Primer**

Moisture curing glass primer

## Description

Moisture curing glass-primer

#### Area of application

- Primer for Carsystem Uniflex Glas and Glas HM Provides adhesion between glass and glass
- bonding glue Application on the ceramic zone of the window

#### Application advice

- To use only in combination with Carsystem Uniflex Glas Fast-Cleaner Surface must be clean, dry, dust and grease-free
- Glas Fast-Primer application only after surface treatment with the Carsystem Uniflex Glas Fast-Cleaner = Shake bottle well before use
- Drying time: 15 min

ArtNo.	Specification	SP	MOQ
144.036	black / 30 ml	1	25

## **UNIFLEX Nozzle**

Spare nozzles

#### Description

Spare nozzles for Carsystem Uniflex cartridges

#### Area of application

- Spare nozzles for Carsystem
- UNIFLEX cartridges
- = Fits only for cartridges





ArtNo.	Specification	SP	MOQ
150.292	Nozzles for UNIFLEX PU	12	12
155.241	Nozzles for UNIFLEX MS	12	12



## 154 Bonding & Sealing

## **UNIFLEX Adapter Nozzle**

Wing tip

Description Nozzle for seam sealingWing tip

Art.-No.

149.009

Area of application Seam sealing on folded edges
Fits only for cartridges



SP

MOQ

1 1

UNIFLEX Adapter Nozzle		
Description		
<ul> <li>Nozzle for seam seali</li> <li>"V-form" nozzle</li> </ul>	ng	

Specification

V-nozzle / bag of 10

Area of application For an even sealing of folded edgesFits only for cartridges

Art.-No.

149.010



## **UNIFLEX Air Gun**

Air gun



Specification

bag of 10

## Description

Cartridge air gun for the extrusion of 1K sealing compounds

## Area of application

For extruding of seam sealer
 For 290 ml / 310 ml cartridges and aluminum bags up to 400 ml
 For processing with Uniflex cartridges (PU, MS, Glas, Glas HM)

ArtNo.	Specification	SP	MOQ
153.224	Uniflex Air Gun	1	1

**MS Air Gun** 

MS spray gun



SP MOQ

1 1

#### Description

Manual gun for the extrusion of 1K sealing compounds

## Area of application

- For processing of Carsystem Uniflex cartridges (PU, MS, Glas, Glas HM)
   Classic: for 290 ml / 310 ml cartridges
   Top: for 290 ml / 310 ml cartridges and aluminum bags up to 400 ml

ArtNo.	Specification	SP	MOQ
135.108	Classic for 310 ml	1	1
139.286	Top for 290 – 400 ml	1	1

#### Description

Pneumatic cartridge gun for the extrusion and spraying of 1K sealing compounds

## Area of application

- Spraying and extruding of 1K sealing materials
   For 290 ml / 310 ml cartridges and aluminum bags up to 400 ml
   For processing of Uniflex cartridges (PU, MS, Glas, Glas HM)

ArtNo.	Specification	SP	MOQ
125.681	MS Air Gun	1	1
131.563	spare nozzle set	1	1

Double sided adhesive tape

#### Description

- Double sided tape Temperature resistance:
- -40°C to +120°C
- Black adhesive tape
- Based on polyethylene Modified acrylate glue

## Area of application

- Usable for permanent application with high shear and UV exposure, softeners and a wide temperature range (e.g. edge lining and emblems, side bumpers, mirror glass or counterbalance lead weights)
- Industrial mounting of signs or labels interior and exterior

#### Benefits

- High adhesive strength
- Very high UV resistance
- Good solvent resistance
- Flexible fixing also on bended surfaces

ArtNo.	Specification	SP	MOQ
125.712	9 mm × 10 m	2	20
125.713	12 mm × 10 m	2	20
125.720	19 mm × 10 m	1	10
125.725	25 mm × 10 m	1	10
125.726	50 mm × 5 m	1	60

## **HS-Acryl Tape**

Double sided adhesive tape

## Description

- Double sided tape Temperature resistance up to:
- -40°C to +150°C Grev adhesive tape
- Based on acryl
- Acrylate glue

#### Area of application

High performance tape for permanent application with extreme temperatures and humidity (e. g. edge linings and emblems, side bumpers, mirror glasses or counterbalance lead weights) Industrial mounting of signs or labels interior and exterior

Suitable for metal, wood, glass and most common plastics

## Benefits

Extremely high initial adhesion and strength
 High temperature and humidity resistance

ArtNo.	Specification	SP	MOQ
147.024	6 mm × 10 m	2	20
137.072	9 mm × 10 m	2	20
137.073	12 mm × 10 m	2	20
137.074	19 mm × 10 m	1	10
137.075	25 mm × 10 m	1	10

## **KS-200**

Cavity protection

#### Description

- Sprayable cavity protection
- Wax-like cavity protection
   Colour: Brown transparent
   Melting point: 95°C

#### Area of application

For preserving all cavities of car bodies

## Benefits

High creeping capacity also on hard-to-reach areas Rust protection

## Adhesion on metal

- Application advice
- Not overpaintable

ArtNo.	Specification	SP	MOQ
126.062	brown transparent / 11	1	12

## KS-50

Sealing compound - brushable

#### Description

- Brushable sealing compound Permanently elastic
- Based on synthetic rubber Temperature resistance: -25°C to 80°C

## Area of application

Front and back apron, joints and trim pieces, inside the trunk and foot compartment. wheel cases etc.

#### Application advice

Overpaintable after application of an adhesion primer

ArtNo.	Specification	SP	MOQ
150.801	grey / 1 kg	1	12

1	Nylon brush
3	Description
W	<ul> <li>Special brush with nylon bristles</li> </ul>
M	Area of application
	<ul> <li>For processing sealing compounds</li> </ul>

CAR SYSTE/

~

KS-50

PROSCOUTIN

**KS-Brush** 



ArtNo.	Specification	SP	MOQ
141.453	30 mm	1	70

## **KS-500**

Underbody protection bitumen

#### Description

Sprayable underbody protection
 Based on bitumen

## Area of application

Permanent underbody protection for car bodies

## Benefits

- Vibration absorbing Anti-noise compound
- Application advice
- Not overpaintable



ArtNo.	Specification	SP	MOQ
126.034	black / 1 l	1	12
132.483	black / 60 l	60	60

## **Bonding & Sealing**

## **KS-300**

## Cavity wax

## Description

SYSTEM

-

1

1

8

5

\*

KS-200

- Sprayable cavity protection
- Wax-like cavity protection Colour: White transparent
   Melting point: 160°C

## Area of application

For preserving all cavities of car bodies

### Benefits

- Very high melting point
- Drip-free
- Rust protection
- Adhesion on metal

## Application advice

Not overpaintable



ArtNo.	Specification	SP	MOQ
155.650	white transparent / 1 I	1	12

## **KS-100**

Underbody protection bitumen

## Description

- Brushable underbody protection
- Based on bitumen
- Thixotropic bitumen-resin composite

## Area of application

Underbody protection for car bodies

## Application advice

Not overpaintable



ArtNo.	Specification	SP	MOQ
126.032	black / 1 l	1	12

Underbody protection wax

Description Sprayable underbody protection wax Permanent rust protection based on wax

Area of application Permanent underbody protection for car bodies

Benefits High water displacement

Application advice Not overpaintable



ArtNo.	Specification	SP	MOQ
126.095	black / 1 l	1	12

**Bonding & Sealing** 

## **KS-1000**

Stone chip protection

## Description

- Sprayable stone chip and underbody protection Based on plastic rubber
- Free of asbestos

## Area of application

Underbody treatment for car bodies Stone chip protection for spoilers, sills and lower door areas

## Benefits

- Vibration absorbing Anti-noise compound
- Also suitable for PVC substrates

## Application advice

 Overpaintable after application of an adhesion primer

ArtNo.	Specification	SP	MOQ
149.266	white / 1 I	1	12
149.264	grey / 1 l	1	12
149.265	black / 1 l	1	12

## **KS-4000**

Stone chip protection water-based

#### Description

- Sprayable stone chip protection Water-based
- Free of solvents

#### Area of application

Spravable stone chip protection and seam sealer for car bodies

#### Benefits

- Vibration absorbing
- Anti-noise compound Solvent resistant
- Very high abrasion resistance

## Application advice

- Overpaintable after application of an adhesion primer
- Suitable for oven drying
  Very good sandable after final hardness
  Variable structure fine or rough possible

ArtNo.	Specification	SP	MOQ
134.374	black / 1 l	1	12

## KS-2100

Stone chip protection + seam sealer

#### Description

Sprayable stone chip protection and seam sealer
 Rubber/resin basis

#### Area of application

Stone chip protection Seam sealer for car bodies

## Benefits

- Vibration absorbing
- Anti-noise compound Rust protection
- High shifts without paint run possible

#### Application advice

Art.-No. 139.214

140.146

Overpaintable after application of an adhesion primer

Specification

grey / 11

black / 1 l

_		
	KS-2100	14. HILM
	2 att Taxeet atter Taxeet atter	A to day
	Contraction of the	MMMM I
	Section of the local division of the	
	And	Total A
	Constanting of the	ANNUAL OF
	And and a local division of the	7

SP

1

1

## **KS-3000 Plus**

HS stone chip protection

#### Description

Sprayable stone chip and underbody protection Rubber/resin basis

#### Area of application

Stone chip and underbody protection for car bodies

## Benefits

- Vibration absorbing
- Anti-noise compound
   Rust protection
- Very weather resistant Very high abrasion resistance

## Application advice

- Overpaintable with water base paint without a primer
   Overpaintable with 2K or acrylic paints after
- application of an adhesion primer
- Suitable for oven drying
  Very good sandable after final hardness
- Variable structure fine or rough possible

ArtNo.	Specification	SP	MOQ
152.621	white / 11	1	12
152.804	grey / 1 I	1	12
152.622	black / 1 l	1	12



SYSTEM

KS-1000

1

19

## **KS-Gun**

Underbody protection gun

#### Description

- Pneumatic pressure cup gun Structure aun
- Cup content: 11

#### Area of application

- Rust protection, underbody protection and cavity protection
   Processing of solvent- and
- water-based products

#### Benefits

- Amount of air and material output adjustable
- Various structures possible

ArtNo.	Specification	SP	MOQ
157.032	gun for underbody protection	1	1
142.279	tube set / 0.95 m	1	1
147.956 KS-Gun replacement tank gasket		1	1
158.017	KS-Gun nozzle	1	1



1.10





MOQ

12

12

## **Bonding & Sealing**

## **KS-Dual Gun**

Underbody protection gun

## Description

SYSTEM

KS-4000

40550

- Pneumatic underbody and
- cavity protection gun Including two sucction pipes
- Quick coupling

#### Area of application

Rust protection, underbody protection and cavity protection

## Benefits

- Fast change of material possible
- Less gun cleaning



ArtNo.	Specification	SP	MOQ
126.040	incl. 2 additional suction pipes / without cavity protection tube	1	1
126.058	0.9 m / cavity protection tube	1	1
126.048	replacement suction pipes	1	1



Cavity protection ML

## Description

- Cavity protection spray
- Wax like cavity protection
- Melting point: 160°C

## Area of application

For renewing or repairing of existing coatings

## Benefits

- Very high melting pointDrip-free
- Rust protection
  Adhesion on metal

## Application advice

Not overpaintable



SEALING &

ArtNo.	Specification	SP	MOQ
126.061	brown-transparent / 500 ml / incl. hose	1	12

## KS-400

Rust protection wax

## Description

- Rust protection wax Liquid rust protection
   Temperature resistance: -25°C to +160°C

## Area of application

- Transparent conserving of rust exposed
- analyze toolies
  Suitable to protect subareas of the engine
  Protects also hinges

## Benefits

Good water displacement Very temperature resistant

## Application advice


Not overpaintable

Art	No. Sp	pecification SF	P MOQ
125.4	168 trans	parent / 500 ml 1	12

**Bonding & Sealing** 



KS-550 Underbody protection bitumen



Area of application For renewing or repairing of existing underbody coatings

No gun application necessary

Application advice Not overpaintable



ArtNo.	Specification	SP	MOQ
126.029	black / 500 ml	1	12

## **Power Mix**

2K PU glue

Description 2K Polyurethane glue

## Area of application

- Repair of plastic parts
- = Suitable for metal, wood, stone,
- concrete or glass For wide area glueing and filling of cavities

## Application advice

= 25 ml cartridges manual dosage 50 ml cartridges for Power Mix gun
We recommend the use of the adhesion promoter 144.502 / Carsystem Power Mix Primer / Activator 150 ml

ArtNo.	Specification	SP	MOQ
144.498	clear / 25 ml	1	1
144.500	clear / 50 ml	2	2
144.499	black / 25 ml	1	1
144.501	black / 50 ml	2	2

## KS-850

Underbody protection wax

## Description

- Underbody protection wax spray
   Permanent rust protection based on wax
- Temperature resistance: -25°C to +80°C

## Area of application

For renewing or repairing of existing underbody coatings

## Benefits

Good water displacement

## Application advice

Not overpaintable

Art.-No.

126.094

## KS-1050 Stone chip protection

## Description

- Underbody protection spray
   Based on synthetic rubber
- Free of asbestos

## Area of application

For renewing or repairing of existing stone chip protections


#### Benefits

No gun application necessary Also suitable for PVC substrates

## Application advice

Overpaintable after application of an adhesion primer





SYSTEM

KS - 850

POSID

ArtNo.	Specification	SP	MOQ
126.022	grey / 500 ml	1	12
126.023	black / 500 ml	1	12

Power	Mixe
Mixing tube	– 50 ml

Description

Plastic mixing tube = Colour: Blue

## Area of application

Mixing tube for Carsystem Power Mix 50 ml cartridges

Mixer



ArtNo.	Specification	SP	MOQ
140.926	mixing tube / blue	12	12



## **Power Mixer**

Mixing tube – 25 ml

## Description

Plastic mixing tubeColour: Green

## Area of application

Mixing tube for Carsystem Power Mix 25 ml cartridges



ArtNo.	Specification	SP	MOQ
151.952	mixing tube / green	12	12

## **Power Mix Gun**

2K PU-glue gun

## Description

Application gun for plastic repairs

Area of application

 Application gun for Carsystem Power Mix 50 ml cartridges



ArtNo.	Specification	SP	MOQ
140.927	cartridge gun	1	1



## **Power Mix Film**

Backing and supporting film

## Description

- Backing and supporting film
   Front side: With a supporting mesh
   Back side: Plain film, to be removed
- after curing = Size: 12,5 × 150 cm

## Area of application

- Plastic repair
   Supporting the plastic compound
   Usable with Carsystem 2K Power Mix PU compounds

ArtNo.	Specification	SP	MOQ
144.503	backing / supporting	1	1

## **Sound Deadening Panels**

Sound deadening panels

Description







A	rea of application
	For insulating sounds
	and vibrations

ArtNo.	Specification	SP	MOQ
126.055	25 × 50 cm / bitumen black / 1 carton à 5 pcs.	5	25
134.139	50 × 50 cm / patterned-black / 1 carton à 10 pcs.	10	50
134.140	50 × 50 cm / smooth-black / 1 carton à 10 pcs.	10	50

# 163

## **Power Mix Primer**

Primer + activator

## Description

- Adhesion primer for plastic parts
   Colour: Transparent

## Area of application

Adhesion primer for glueing different plastic parts



ArtNo.	Specification	SP	MOQ
144.502	clear / 150 ml	1	1

## **Steel Bond**

Repair compound

## Description

- 2K Repair and glue compound
  Based on solvent free epoxy resin
  High temperature resistance
  Colour: Grey metallic

## Area of application

- For connecting the same or different types of material e. g. steel, aluminium, lead, wood, iron etc.
   For filling holes, funnels, cracks etc.
   Sealing and insulation material for permanent repeated in the permanent of the second se
- repairs especially in environments, where welding is not an option
- High chemical resistance against oil, gasoline and most of organic liquids

#### Benefits

- Filling, sealing and glueing
  Very good mouldable
  Extremely durable after curing
  Low shrinkage





# BONDING & SEALING

# COCKPIT-SPRAY GUN CLEAN SET CLEANING WIPES STAUB STOP CLEANING WIPES STAUB STOP PUMP SPRAY CLEANING STAUP SPRAY CHAMOIS SQUEEZER SILICONE REMOVER H20 CLEANER SCRAPER CAR CLEAN MULTI



# Cleaning

## **UV Gun Cleaner**

Gun cleaner

Description Gun cleaner

## Area of application

Intermediate cleaning of the UV-gun

- after application of UV-materials Protects the air cap from drying out

## Benefits Fast and easy cleaning

## Application advice

Art.-No.

154.615

We also recommend to use the gun cleaner for splashing the paint channels & the body of the spray gun

Specification

400 ml



SP

1

REMOVER

1

MOQ

6

Silicone	Remover	Mild
----------	---------	------

Silicone remover - solvent based

#### Description Silicone remover Solvent based

Area of application Silicone and grease remover Cleaning of dirt residues prior to painting
 For all daily cleaning works



## H<sub>2</sub>O Cleaner



## Silicone Remover Spray


Silicone remover


# Description

Silicone remover spray

## Area of application

Cleaner for all works prior to painting Removes dirt, fat, oil, silicone, wax, tar, glue residues etc.

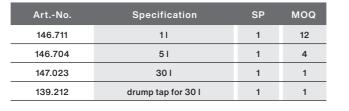





ArtNo.	Specification	SP	MOQ	ArtN
149.423	400 ml	1	6	146.70

ArtNo.	Specification	SP	MOQ
146.705	51	1	1

## **ISO-VE 7030**

Isopropanol cleaner

## Description

Special cleaner
 Isopropanol-based

## Area of application

- Perfectly suitable for gentle cleaning of plastic, GRP or
- CRP surfaces Residue-free removal of release
- agents, dirt, grease, oil, silicone, as well as residual minerals and

salts from the surface Antistatic

## Benefits

- Antistatic
- Very volatileExtremely fast cleaning

## Application advice

Could etch 1K materials

ArtNo.	Specification	SP	MOQ
154.034	51	1	1
157.345	201	1	1



### Description

- Intensive cleaner
- Water-based

#### Area of application

- = Efficient and enviromently friendly cleaning of tools
- and parts in the body shop
- Perfect for paint stripping from panel stands

## Benefits

- Removes water-based and solvent-based paints,
- 2K primers and epoxy resin-based products Multiple times usage (pigments sediment on the bottom
- and can be strained off) Water-dilutable

## Application advice

- Air nipples can start oxidating after a long time exposure
- Aluminum nipples could corrode

ArtNo.	Specification	SP	MOQ
151.953	51	1	1

## **Staub Stop Super Wave**

Tack cloth

#### Description

- Tack cloth
- Cotton-rayon mix in wave form
- Wave formed surface
   Free of silicones

## Area of application

Removal of dust prior to painting

- Wave form enlarges the absorption quantity
- Is able to hold incredible amounts of dust
  Wave form adapts to hand and surface



ArtNo.	Specification	SP	MOQ
148.124	1 unit	1	50



## **Staub Stop Water Black** Tack cloth





## NEW

## Description

- Tack cloth
- Non-woven with hot melt-impregnation
   Silicone & lint free

## Area of application

Removal of dust
 Especially for cleaning the surface before applying water-based top coats

## Benefits

Black non-woven cloth offers visual control of contaminated areas, on the tack cloth

- Resealable packaging
- Leaves no adhesive residues on the cleaned surface
   Acrylic binder for better durability and abrasion resistance
- without fiber loss
- Retains twice as much dust than traditional tack cloths

ArtNo.	Specification	SP	MOQ
158.033	10 pcs. / black / 32 × 40 cm	10	180

## **Staub Stop** Tack cloth

- Description
- Tack cloth
  Rayon fabric
  Slightly sticky surface
  Free of silicones
- Area of application
- Dust removal prior to painting
- Benefits Very good dust removal Does not dry out



ArtNo.	Specification	SP	MOQ
132.615	1 unit	1	500
132.616	5 units (pack)	1	100

## **Car Clean Multi Extreme Box**

Cellulose cloth

#### Description

- Special cellulose cleaning cloth
   250 tear-offs in a dispenser box
- = 100 % rayon fabric

## Area of application

Universal cleaning cloth for all cleaning works

#### Benefits

- High absorbing cloth
- Good solvent resistanceTear resistant
- Lint free due to cutted edgesWashable and reusable

ArtNo.	Specification	SP	MOQ
142.765	Box à 250 pcs. / 32 × 38 cm	1	1

Cleaning

STREEM

STAUB-STOP

## **Staub Stop**

Water Tack cloth

## Description

- Tack cloth Micro fiber fabric
- Water-soluble impregnationFree of silicones

## Area of application

- Absorption of dust
  Especially for cleaning the surface before applying water-based top coats
- Especially, for cleaning of dry water-based top coats

## Benefits

- No tacky residues
- Never leaves streaks of resin

ArtNo.	Specification	SP	MOQ
144.538	10 pcs.	10	240

## Car Clean Multi

Paper cleaning cloth

## Description

- Special paper cleaning cloth
- Perforated roll

## Area of application

- Perfect for higher amounts of liquid
- For paint, metal and smooth wooden surfaces
   Takes off solvents, oil and lubricants

- High absorbing cloth
   Good solvent resistance
- Tear resistant

ArtNo.	Specification	SP	MOQ
134.577	500 tear-offs / 36 × 32 cm	1	1



# Cleaning

## **Car Clean Multi Box**

Paper cleaning cloth

## Description

Special paper cleaning cloth = 250 tear-offs in a dispenser box

## Area of application

- Perfect for higher amounts of liquid
- = For paint, metal and smooth wooden surfaces
- Takes off solvents, oil and lubricants

Specification

32 × 38 cm / Box à 250 pcs. 1 1

## Benefits

- High absorbing cloth
- Good solvent resistance Tear resistant

Art.-No.

139.910

Lint free due to cutted edges

	4	1
CAR	-	
Min and		

SP

MOQ

## **Car Clean Double Blue**

Paper cleaning cloth

## Description

Paper cleaning cloth 2-layers Perforated roll Layers fully bonded

## Area of application For all standard cleaning works



ArtNo.	Specification	SP	MOQ
134.580	1,000 tear-offs / 36 × 36 cm	2	2



## Description

- Special cleaning wipes
   Dispenser roll for the Carsystem dispenser bucket Fine multi-holes

#### Area of application

Universal soft cleaning cloth for all cleaning works

## **Car Clean Triple Blue**

Paper cleaning cloth

- Description Paper cleaning cloth 3-layers
   Perforated roll
- All layers fully bonded

Area of application

For all standard cleaning works

ArtNo.	Specification	SP	MOQ
134.578	500 tear-offs / 36 × 36 cm	2	2
134.579	1,000 tear-offs / 36 × 36 cm	1	1

## **Car Clean Double White**

Paper cleaning cloth

## Description

Paper cleaning cloth 2-layers
 Perforated roll

#### Area of application

For all standard cleaning works



ArtNo.	Specification	SP	MOQ
141.253	1,500 tear-offs / 38 × 24 cm	2	2

## **Cleaning wipes**

Cleaning wipes

#### Description

- Special cleaning wipes
   Dispenser roll perforated tear-offs
   Fine multiholes

## Area of application

Universal soft cleaning cloth for all cleaning works

## Benefits

- Extremely absorbent
- Solvent resistant
   Lint-free cleaning

= Ultra soft

- Cleans also in deepest structures
- = Extremely tear resistant, even when wet

Washable and reusable

ArtNo.	Specification	SP	MOQ
156.458	cleaning wipes roll soft / 475 tear-offs / 38 × 30 cm	2	2

#### Benefits

- Extremely absorbentSolvent resistant
- Lint-free cleaning Ultra soft
- Cleans also in deepest structures
   Extremely tear resistant, even when wet
- Washable and reusable
   "Ready to use" cleaning wipes out of the Carsystem dispenser bucket

## Application advice

- We recommend to use only the Carsystem
- ISO VE 7030 cleaner

ArtNo.	Specification	SP	MOQ
156.457	wipes soft roll for bucket / 100 tear-off / 30 × 32 cm	1	6
156.459	bucket for wipes soft	1	1

## Chamois

Synthetic leather

## Description

- Synthetic glass cleaning leather
   Surface with multi-holes

## Area of application

Cleaning of windows and mirrors
 Water displacement after car wash

#### Benefits

Absorbs all water drops without residues



ArtNo.	Specification	SP	MOQ
140.983	40 × 35 cm	1	30

## Squeezer

Squeezer sponge

Description Soft swelling sponge made of absorbent natural fibers




Cleaning

ArtNo.	Specification	SP	MOQ
139.858	squeezer sponge – neutral	1	520
157.987	Squeezer sponge with Carsystem branding	1	520

## Scraper Paint off blade

Description Paint off security blade Area of application Removal of overspray



ArtNo.	Specification	SP	MOQ
140.984	Scraper	1	200
140.985	Refill (100 Blades)	1	50



## **Pump Spray**

Pump spray

## Description

Pump spray bottle
100 % recycled plastic
Content: Max. 0,9 I

## Area of application

Application and atomisation of liquids out of buckets or barrels Suitable for Carsystem Silicone Remover Mild, Silicone Remover Water and ISO-VE 7030

## Benefits

Adjustable atomisation

ArtNo.	Specification	SP	MOQ
157.412	white / 1 I	1	60
142.808	translucent / 11	1	60
139.606	replacement viton sealing set	1	1
146.680	spare nozzle	1	1
153.269	replacement viton sealing spray head	1	1

## **Cockpit-Spray**

Cleaning spray

## Description

Care and cleaning spray Free of silicones

Odour: Citrus

Area of application All interiour plastic and rubber surfaces

#### Benefits Antistatic

## Application advice

Art.-No.

126.020

 Avoid application on steering wheel, gear handle and foot pedals

Gun cleaning set

## Description

SYST

COCKPIT SPRAY

Gun cleaning set 17 single items 6 different needles and 11 different brushes



Specification	SP	MOQ	ArtNo.	Specification
transparent / 400 ml	1	12	157.520	Set

## Nano Easy Cleaner

Cleaning sponge

## Description

Cleaning sponge with nano coating

## Area of application

- Cleaning of glass, paint and plastics
- Suitable for windows, head lamps, mirrors and painted surfaces
- Do not use in conjunction with cleaning agents, cleaner can attack the nano coating

## Benefits

Special nano coating removes insects, overspray and dirt easily

ArtNo.	Specification	SP	MOQ
143.383	cleaning sponge	1	10

SP

1 50

MOQ



SYSTEM

## **Coding Caps**

Colour code rings



## Description

Plastic colour code rings

#### Area of application

Colour coding for Carsystem pump bottles

## Benefits

Pump bottles can be clearly distinguished

ArtNo.	Specification	SP	MOQ
152.642	coding caps set of 5 pcs.	1	1



Cleaning clay

## Description

Cleaning clay

## Area of application

Residue and scratch-free removal of overspray, flash rust, insects and tree gum from painted surfaces

- Environmently friendly no solvents
- Remains wet and does not get brittle (store it in the box)

ArtNo.	Specification	SP	MOQ
147.468	200 g	1	10

PREP HAND NEOPREN HAND HAND CLEANER STAR MASK NITRIL HAND PREMIUM DISPOSABLE PROTECTIVE COVERALL **PERSONAL SAFETY** *RESPIRATOR MASKS* FFP2 FFP3 SAFETY LENS UV-PROTECTIVE GLASSES **COVERALL BLACK SUIT** STAR DUST LATEX HAND PREMIUM



## Star Mask

Respirator





## Description

- Half mask with filters Exchangable filters and pre-filters
- Bayonet fixing on the filters
   Protection class FFA2 P2 R
- Area of application
- All common paint works

## Benefits

Perfect protection against dust, dirt, organic vapours of solvents Pre-filter for a longer lifetime of the filters

## Application advice

Attention to different regional legislations

ArtNo.	Specification	SP	MOQ
141.143	М	1	12
141.145	L	1	12

## **Star Mask Disc**

Filter frame

### Description

Frame for the Carsystem Star Mask Pre P2 R pre-filters

## Area of application

The frame fixes the pre-filter on the charcoal filter



ArtNo.	Specification	SP	MOQ
144.310	Filter Holder	2	20

## Star Mask Refill

Charcoal filter

## Description

Replacement filters for the Star Mask Charcoal filters protection class A2

Area of application

Protects against dust, dirt and organic vapours

ArtNo.	Specification	SP	MOQ
141.224	Protection class A2	2	60

## Star Mask Pre P2 R

Pre-filters

## Description Pre-filters for Star Mask Refill

Protection class P2 Area of application

Protects against particles e. g. dust, smoke and aerosols





## **Respirator Mask FFP2** with valve

Respirator mask

## Description

- Dust mask / FFP mask
- Protection class FFP2 NR
- Variable aluminium nose stripe for better fitting
- Exhaust valve

## Area of application

Protects against harmful oil- or water-based particles

## Benefits

- Soft and gentle inner section Suitable in combination with safety glasses
   Exhaust valve reduces the heat accumulation
- inside the mask

### Application advice

We recommend to exchange the mask after every work shift

ArtNo.	Specification	SP	MOQ
158.075	Protection class FFP2 NR	20	120



## Personal Safety

## Star Dust P2

Dust mask

## Description

- Dust mask / FFP mask
   Protection class FFP2 NR
- Variable aluminium nose stripe for better fitting

### Area of application

Protects against harmful oil or water-based particles

## Benefits

- Soft and gentle inner section Suitable in combination with
- safety glasses

#### Application advice

We recommend to exchange the mask after every work shift

ArtNo.	Specification	SP	MOQ
140.951	Protection class P2	20	120

## **Respirator Mask FFP3** with valve

Respirator mask FFP3

#### Description

- Dust mask / FFP mask
- Protection class FFP3 NR
- Variable aluminium nose stripe for better fitting
- Exhaust valve

## Area of application

Protects against harmful and carcinogenic particles based on oil or water as well as against radioactive particles, airborne biological agents of risk groups 2 + 3 and enzymes

## Benefits

- Soft and gentle inner section
   Qualitative headbands for a comfortable fit
- Foam stripe around the nose
- Suitable in combination with safety glasses
- Exhaust valve reduces the heat accumulation inside the mask

#### Application advice

We recommend to exchange the mask after every work shift

ArtNo.	Specification	SP	MOQ
158.076	Protection class FFP3 NR	20	120



NEW

## Safety Lens

Protective glasses



## Description

Safety glassesPolycarbonate glasses

## Application advice

Glasses can be cleaned with warm water and soap

ArtNo.	Specification	SP	MOQ
140.955	Safety Lens	1	12

## **Disposable protective coverall**

Protective Coverall



## **Safety Lens Vario**

Protective glasses



## Description

- Safety glasses
  Polycarbonate glasses
  Variable temples

## Application advice

Glasses can be cleaned with warm water and soap

ArtNo.	Specification	SP	MOQ
140.954	Safety Lens Vario	1	10

## Paint Overall Blau

Protective coverall



UV-protective glasses



#### Description

UV-protective glasses Polycarbonate glasses

## Area of application

Protects from UVA, UVB and UVC radiation

## Benefits

PVC nose piece for perfect fit
Anti-slip pads

- Scratch resistant, anti-fog glasses
   Suitable in combination with hearing protection

## Application advice

Glasses can be cleaned with warm water and soap

ArtNo.	Specification	SP	MOQ
154.263	UV glasses	1	12



# \_79

## Description

- Disposable protective coverall
   PPE-Cat III, Type 5 and 6
- Free of silicone and latexDust and lint free

#### Area of application

- Perfect for painting in the spray booth
   Protects against overspray, solvents, water and harmful dust

#### Benefits

- Antistatic coating (EN 1149-5:2008)
  Breathable
  The knitted cuffs close wrists and ankles perfectly tight and offers a perfect comfort
- Antistatic

#### Application advice

We recommend to exchange the protective coverall after every shift to prevent linting on the breathable back side

ArtNo.	Specification	SP	MOQ
155.616	S	1	25
155.617	М	1	25
155.618	L	1	25
155.619	XL	1	25
155.620	XXL	1	25
155.621	XXXL	1	25

### Description

- Protective coverall
- Soft polyester fabric
   PPE-Cat. I

## Area of application

Protects from unharmful chemicals e. g. water-based paint or mild cleaners

- Antistatic coating (EN 1149-1:2006)
   Dust and lint-free
- Protection against overspray
- Free of silicones

ArtNo.	Specification	SP	MOQ
139.232	S	1	50
139.233	М	1	50
138.472	L	1	50
138.473	XL	1	50
139.234	XXL	1	50
152.968	3XL	1	50

## Carbo 2 Perfect

Protective coverall



### Description

- Two-piece protective coverall
  98 % polyester, 2 % carbon
  Washable up to 40°C
  PPE Cat. 1

- Free of silicones
  Dust and lint free

#### Area of application

Protects from unharmful chemicals e. g. water-based paint or mild cleaners

#### Benefits

- Antistatic coating (EN 1149-1:2006)
  Protection against overspray
  Breathable due to ventilation slots and mesh areas
  The knitted cuffs close wrists and ankles perfectly tight and offer a perfect comfort

ArtNo.	Specification	SP	MOQ
156.547	jacket Carbo 2 Perfect / M	1	25
156.548	pants Carbo 2 Perfect / M	1	25
156.549	jacket Carbo 2 Perfect / L	1	25
156.550	pants Carbo 2 Perfect / L	1	25
156.551	jacket Carbo 2 Perfect / XL	1	25
156.552	pants Carbo 2 Perfect / XL	1	25
156.553	jacket Carbo 2 Perfect / XXL	1	25
156.554	pants Carbo 2 Perfect / XXL	1	25



COVERALL BLACK SUIT Protective coverall CARSYSTEM

## Description

- Protective coverall
  99 % nylon, 1 % carbon
  Washable up to 30°C
  PPE Cat. I
- Free of silicones
- Dust and lint free

## Area of application

Protects from unharmful chemicals e. g. water-based paint or mild cleaners

## Benefits

- Antistatic coating (EN 1149-3:2004)
   Protection against overspray
   Extremely breathable due to its special elastic birds eye fabric
- The knitted cuffs close wrists and ankles perfectly tight and offer a perfect comfort
- Elastic areas on the back and modern cut provide a perfect adaption to the body shape

ArtNo.	Specification	SP	MOQ
157.775	S	1	20
157.776	М	1	20
157.777	L	1	20
157.778	XL	1	20
157.779	XXL	1	20
157.780	3XL	1	20

# 181



## **Nitril Hand Premium black**

Protection gloves

#### Description

 Nitril gloves 100 pieces in a dispenser box
Free of silicones, latex and powder



#### Area of application

Protects against dirt, paint and chemicals

## Benefits

Enhanced thickness

Very elastic and tear resistant Perfect fit and feel

#### Application advice

Short time solvent resistant

Touch screen processing is possible

ArtNo.	Specification	SP	MOQ
156.623	S	100	1000
156.624	М	100	1000
154.347	L	100	1000
154.348	XL	100	1000

## **Latex Hand I Premium**

Protection gloves

## Description

Latex gloves 50 pieces in a dispenser box
Powder-free Extra long cuff

## Area of application

Perfect for fast gun cleaning Protects from light solvents and paints

## Benefits

Extra thick Perfect feel and touch when working with solvents and in wet / oily environments

ArtNo.	Specification	SP	MOQ
152.011	L	50	500
152.012	XL	50	500



Protective gloves

- Description
- Latex gloves
- 100 pieces in a dispenser box
  Slightly powdered

## Area of application

Protects against dirt, paint and chemicals

#### Benefits

Slight powder shift makes it easy to put the gloves on and off

ArtNo.	Specification	SP	MOQ
157.981	L	100	1000

## **ASAP Thick Nitril PF**

Protection gloves



## Description

Nitril gloves 100 pieces in a dispenser box
Free of silicones, latex and powder

## Area of application

Protects against dirt, paint and chemicals

## Benefits

Elastic and tear resistant Gives a great fingertip touch

## Application advice

Short time solvent resistant

Touch screen processing is possible

ArtNo.	Specification	SP	MOQ
158.029	S	100	1000
158.030	М	100	1000
158.031	L	100	1000
157.385	XL	100	1000

## Super Nitril Hand I

Protection gloves

#### Description

Chemical protection gloves Length: 30 cm

- Soft velour inner section
   Base layer: Nitril

## Area of application

- Perfect for handling slippery parts in
- moist, oily and greasy enviroments Protects against chemicals

## Benefits

Perfect feel and touch when working with solvents and in wet /

- oily environments
- Good insulation against heat and cold Palm and fingertips with honeycomb pattern for better grip

ArtNo.	Specification	SP	MOQ
145.130	9 / Pair	1	144
145.131	10 / Pair	1	144

## Personal Safety

## **Neopren Hand**

Protection gloves

## Description

NEW

- Neoprene / Latex chemica
- protection gloves Length: 30 cm



- Perfect for handling slippery parts in moist, oily and greasy enviroments
   Protects against chemicals acids, brines, mineral oils, greases and solvents

#### Benefits

- Perfect mixture between neoprene for chemical protection
- and latex for the flexibility and durability Palm and fingertips with honeycomb pattern for a better grip Good insulation against heat and cold

ArtNo.	Specification	SP	MOQ
140.939	L / Pair	1	12
140.940	XL / Pair	1	12
140.941	XXL / Pair	1	12

## **Prep Hand Cut II**

Protectiion gloves

## Description

- Cut protection glove
   Palm and fingertips PU coated
- Base layer: HPPE-glass fiber
   ISO 13997- cut value: C

## Area of application

Perfect for all assembly work with the risk of cuts

- Breathable
- Safer grip
- Abrasion resistance
  Comfortable fit

ArtNo.	Specification	SP	MOQ
155.539	10 / Pair	1	100





## **Prep Hand II**

Work gloves

## Description

- Work gloves PU coated
   Palm and fingertips PU coated
   Base layer: Polyamide (Nylon)

## Area of application

Perfect for assembly work without the risk of cuts or exposure to chemicals / solvents

## Benefits

- Breathable
- Safer grip with excellent fingertip touch
- Abrasion resistance
   Comfortable fit

ArtNo.	Specification	SP	MOQ
150.719	L	12	144
150.720	XL	12	144
150.721	XXL	12	144

## **Prep Hand III**

Work gloves

## Description

Work gloves PU coated
 Palm and fingertips soft PU coated
 Base layer: Polyamide

#### Area of application

Perfect for assembly- and grinding work without the risk of cuts or exposure to chemicals / solvents

## Benefits

- Extremely soft and flexibleBreathable
- Safer grip with excellent fingertip touch
- Touch-screen operation possible
   Abrasion resistance
- Perfect fit

ArtNo.	Specification	SP	MOQ
145.132	9 / Pair	12	144
145.133	10 / Pair	12	144

## **Hand Cleaner extreme**



## Hand Cleaner

Hand cleaner



## Description

- Mild hand cleaner
- Usage during or after work
   Free of silicones
- Plant based scrubs

## Area of application

Removes even resistant dirt of greases and bitumen

## Benefits

- Pleasant smellFree of solvents
- Biodegradable
- Smooth and comfortable feel due to a natural and skin-friendly oil
- Bulk packing with 31

ArtNo.	Specification	SP	MOQ
155.356	Bulk packing without pump / 3.0 l	1	6





ArtNo.	Specification	SP	MOQ
155.359	Pump for Hand Cleaner 3 I	1	1



- Personal Safety

# 85

### Description

- Intensive hand cleaner
- Usage during or after work Free of silicones
- Plant based scrubs

## Area of application

Removes even resistant dirt of paint, oil paint and resins

## Benefits

- Pleasant apple smell
- Free of solvents
   Biodegradable
- Smooth and comfortable feel due to a natural and skin-friendly oil
   Wall mount with 2 I soft bottle
- Bulk packing with 3 I

ArtNo.	Specification	SP	MOQ
155.348	Soft bottle without wall dispenser / 2.0 I	1	6
155.357	Bulk packing without pump / 3.0 l	1	6

## Wall dispenser for Soft Bottle 2 I

Wall Dispenser

## Description

Wall dispenser for Hand Cleaner extreme Soft Bottle



ArtNo.	Specification	SP	MOQ
155.350	Wall dispenser for Soft Bottle	1	1

PERSONAL SAFETY

# CAR CLEAN TROLLEY SAFETY KNIFE UV LED LAMP XL WORK SHOP BUCKET PAINT TROLLEY ACCESSORIES PAPER TROLLEY UV TIMER COLOUR MATCH LAMP PAINT TROLLEY WORK SHOP SEAT UV SMART LAMP MAGNETIC FLAT STRIP MINI INFRARED THERMOMETER



Accessories

## UV Smart Lamp

## UV hand lamp



## Description

- Power: 5 watt
- Battery: 3.7V 2.6 Ah Li-Ion
- Charging time: 4 hours
  Running time: 4,5 hours
- Working temperature: -10°C to +40°C
  Weight: 310 g
  Dimensions: 190 × 56 × 29 mm
  Certification: IP65 | IK07

## Area of application

UV hand lamp for curing UV products for spot repair on a surface with a maximum diameter of 10 cm

## Benefits

- Battery operated UV hand lamp for flexible use
   Adjustable magnetic stand for working on vertical application areas
- Hook for space-saving storage

#### Application advice

Always protect your eyes when using UV lamps
 Wear Carsystem UV safety glasses

ArtNo.	Specification	SP	MOQ
153.777	190 × 56 × 29 mm	1	12



ArtNo.	Specification	SP	MOQ
154.646	Tripod for LED Lamps	1	6

## **UV LED Lamp XL**

UV LED lamp XL



## Description

- Power: 30 watt
- Power: 30 watt
   Battery: 11.1V 5.2 Ah Li-Ion
   Charging time: 3 hours 45 minutes
   Working time: 2,5 hours
   Working temperature: -10°C to +40°C
- Weight: 1,34 kg
   Dimensions: 266 × 237 × 59 mm
   Certification: IP65 | IK07

## Area of application

UV LED lamp for curing UV products on a surface with a maximum diameter of 70 cm at a distance of 30 cm

## Benefits

- Battery operated UV LED lamp for flexible use
   180° swivel stand to set the required lighting angle
- Operation during charging process possible
   Extremely robust and resistant

## Application advice

Always protect your eyes when using UV lamps.
Wear Carsystem UV safety glasses.

ArtNo.	Specification	SP	MOQ
155.036	UV LED Lamp XL	1	6

## Timer

Timer for UV Lamps

Description = UV Timer to control drying times



ArtNo.	Specification	SP	MOQ
154.772	Timer for UV Lamps	1	1

## Magnet for LED Lamps

Magnet

## Description

Magnet for flexible fixing of LED Lamps



ArtNo.	Specification	SP	MOQ
154.648	Magnet for LED Lamps	1	60

## **Mini Infrared Thermometer**

Infrared mini-thermometer

## Description

- Robust aluminium housing
   Impact-free measuring of temperatures
- between -33°C and +220°C

## Area of application

For measuring object temperatures on surfaces



### Application advice

- For measuring temperatures, point the detector head to the
- object and press the measuring button for about one second The display can be switched between (°C/°F) by the tip of a
- ball pen, pressed into the pit on the backside of the housing

ArtNo.	Specification	SP	MOQ
144,557	Mini Infrared Thermometer	1	1

## LED Lamp

LED lamp



Accessories

## Description

- Power: 20 watt Battery: 11.1V 4.4 Ah Li-Ion
- Charging time: 4 hours
   Running time: depending on mode: 10 Std. / 5 Std. / 2,5 Std.
- Light intensity: Mode 1 = 500 lumen Mode 2 = 1.000 lumen
- Mode 3 = 2.000 lumen = Working temperature: -10°C to +40°C
- Weight: 1.15 kg
   Dimensions: 225 × 220 × 70 mm
   Certification: IP65 | IK07

## Area of application

= LED lamp for universal use in every working enviroment

#### Benefits

- Battery powered LED lamp for flexible use
- 180° swivel stand to set the required lighting angle
   Power selection
- Very even light level due to COB-LED-technology
   Extremely robust and resistant





Blow off gun



## **Blow off stick**

Blow off stick



## **Colour Match Lamp**

Day light lamp



## Description

- Power: 5 watt
- Battery: 3.7V 2.6 Ah Li-Ion
- Charging time: 4 Stunden
  Running time: 2,5 Stunden
  Light intensity: 1. Mode = 2,700K 500 lumen CRI>96+
  2. Mode = 4,500K 500 lumen CRI>96+
- 3. Mode = 6,500K 500 lumen CRI>96+ = Working temperature: -10°C to +40°C
- Weight: 310 g
   Dimensions: 190 × 56 × 29 mm
- Certification: IP65 | IK07

#### Area of application

LED Colour matching lamp

## Benefits

- Battery powered LED lamp for flexible use
   Adjustable magnetic stand for work on vertical application areas
   Choice between three different colour temperatures
- Extremely robust and resistant

Art.-No. Specification SP MOQ 155.614 Colour Match Lamp 1

12

#### Description

- Ergonomic handle
- Scratch resistant
- Scratch resistant
   Maximum pressure: 10 bar
   Temperature resistance: -15°C to +70°C

#### Area of application

For blowing off residual dust from all surfaces

## Benefits

- Blow off gun with metal tip for precise cleaning of surfaces and cavities Blow off gun with noise reduction to ~ 77 db with a scratch preventing plastic nozzle

ArtNo.	Specification	SP	MOQ
145.270	Blow Off Gun with sound absorption and nipple (EU)	1	5
145.271	Blow Off Gun with sound absorption and nipple (CH, NL)	1	5
145.272	Blow Off Gun with metal nozzle and nipple (EU)	1	5
145.273	Blow Off Gun with metal nozzle and nipple (CH, NL)	1	5

## Description

- Noise reduction
- Chemical resistant
  Air consumption: 450 I / min. at 10 bar Temperature resistance: -40°C to +150°C

## Area of application

For blowing off residual dust from all surfaces

#### Benefits

Rubber tip prevents from scratching the surface

ArtNo.	Specification	SP	MOQ
154.123	Blow Off Pen Orion (EU)	1	200
154.124	Blow Off Pen ARO (CH, NL)	1	200

# Accessories

## **RUPES Cleaning and** maintenance oil

Maintenance oil

#### Description

Transparent maintenance oilSilicon-free

Area of application

Maintains and lubricates pneumatic grinding and polishing machines

#### Benefits Also applicable at low temperatures

Corrosion and wear protection

ArtNo.	Specification	SP	MOQ
150.190	50 ml	1	5

## Workshop seat Workshop seat

Description

- Hydraulic height adjustment
  The seat is resistant against chemicals
- and solvents
- Smooth seat cushion for easy cleaning
   Five rubber-protected wheels on ball
- bearings = Max. load: 150 kg

Area of application Comfortable work shop seat in Carsystem design for all sanding and polishing works

#### Benefits

Magnetic storage platform for tools and working materials

ArtNo.	Specification	SP	MOQ
149.427	Work shop seat	1	1



Internet Streets



## CAR Description Capacity: 10 I Area of application Universal work shop bucket

ArtNo.	Specification	SP	MOQ
139.442	Workshop bucket / 10 I	1	1

## **Magnetic Flat Strip**

Flat strip

# Children and a second Description Flexible plastic strip Area of application

Flat and magnetic adhesive plastic strip for sealing the masking film onto the car

ArtNo.	Specification	SP	MOQ
137.214	4 × 55 cm	1	5

## Magnetic Sanding Protection

Edge protection

Description = Flexible plastic edge protection

## Area of application

Magnetic edge protection avoids unwanted sanding on surrounding parts

ArtNo.	Specification	SP	MOQ
130.992	4 × 55 cm	1	5

## **X-Stand Classic**

Paint stand





## Area of application

= Holding different car parts e.g. hoods, doors etc.

ArtNo.	Specification	SP	MOQ
137.349	50 - 100 cm	1	1

Accessories

## **Paint Trolley**

Bumper paint stand

## Description

- Height adjustable bumper paint stand
  Infinitely adjustable inclination
  Ergonomic working position
  Mobile on wheels
  All wheels individually lockable

- For a huge variety of different bumpers

## Area of application

- For assembly, sanding, painting or
- polishing of different bumpers



ArtNo.	Specification	SP	MOQ
148.748	Bumper paint stand	1	1

## X-Stand Top

Paint stand

#### Description

- Height: 50 125 cm
   Maximum load: 120 kg
- = Extension poles available in 55 cm

#### Area of application

Holding different car parts e. g. hoods, doors etc.

ArtNo.	Specification	SP	MOQ
138.851	50 – 125 cm	1	1
138.852	50 – 125 cm incl. extension	1	1

## **Paint Trolley Flexi Plus**

## Paint stand



## Description

- Mobile paint stand with 28 × adjustable axle
  Extremely robust
  Six fixing arms
  Two additional bumper fixing arms
  Dimensions: 225 × 74 × 101c m (l/w/h)
  Maximum load: 50 kg

## Area of application

Holding different car parts e. g. hoods, doors, bumpers, fenders etc.

#### Benefits

- Extremely good qualityVery high stability

ArtNo.	Specification	SP	MOQ
152.596	Paint trolley incl. extention	1	1

## **Paper Trolley**

Triple paper stand

#### Description

- Mobile paper stand for three different paper sizes (22, 60, 90 cm)
   Including adjustable holders for masking tape rolls which fix the tapes perfectly onto the paper edge
   Dimensions: 135 × 59 × 110 cm (l/w/h)

## Area of application

For fast masking work in the paint shop

ArtNo.	Specification	SP	MOQ
138.862	Paper Trolley	1	1

## **Paint Trolley**

## Paint stand



#### Description

- Mobile paint stand with 360° adjustable axle

- Mobile paint stand with 360° adjustable axle
  Four fixing arms
  Two hooks for storing of unused fixing arms
  Paint gun holder
  Dimensions: 225 × 88 × 95 cm (l/w/h)
  Max. load: 50 kg

## Area of application

Holding different car parts e. g. hoods, doors etc.

ArtNo.	Specification	SP	MOQ
138.848	spare claws for paint trolley	1	1
138.849	fixing arm	1	1
154.253	paint trolley incl. extention	1	1

## **MMIR Trolley "Box"**

Masking film stand



Description Mobile masking film stand for rolls in a box. The film is unrolled directly from the box.

Area of application

For fast masking work in the paint shop

.95

## Paper Trolley 1500

Paper stand

## Description

Mobile paper stand for rolls up to 150 cm

## Area of application

For fast masking work in the paint shop



ArtNo.	Specification	SP	MOQ
139.101	150 cm	1	1

ArtNo.	Specification	SP	MOQ
151.514	MMIR Trolley Box	1	1

## 19Accessories

## **MMIR Trolley**

Masking film stand

## Description

- Mobile masking film stand for holding rolls without a box Dimensions: 106 × 44 × 92cm
- (l/w/h)
- Area of application
- For fast masking work in the paint shop

Art.-No.

125.737

 $\mathbf{\cdot}$ 

SP

MOQ

1 1

## **Car Clean Trolley**

Cleaning paper stand


## Description

Floor stand or wall holder for cleaning paper rolls with a width up to 40 cm incl. garbate bag holder included

#### Area of application For flexible cleaning jobs in the paint shop



ArtNo.	Specification	SP	MOQ
139.912	Car Clean Trolley	1	1
139.913	Car Clean Wall Holder	1	1

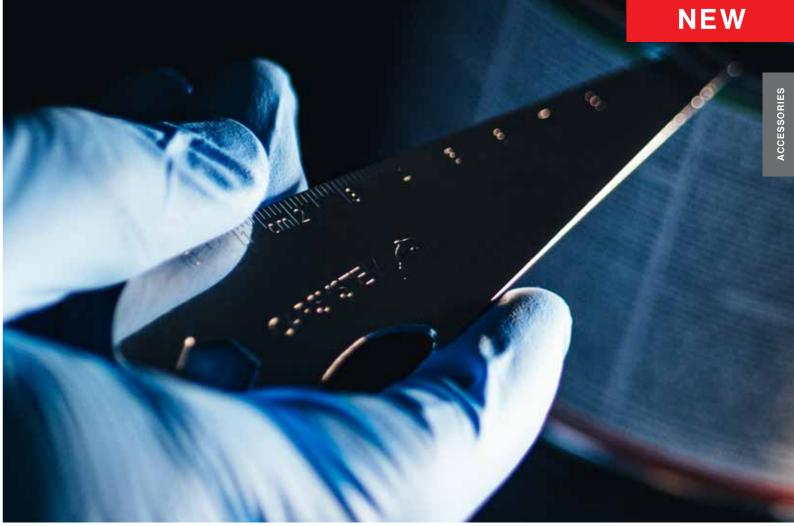

## **Opener for putty and filler cans**

Stainless steel can opener



## Safety Knife

Cutting tool



Specification

MMIR Trolley

## Description

- Safety knife
- Safety knife
  Basematerial: Glass fibre reinforced plastic
  Weight: 24,4 g
  Cutting depth: 6,2 mm
  Scraper blade: 21 mm
  Dimensions: 148 × 11 × 37,2 mm (I/w/h)

## NEW

## Area of application

- Scraping, scratching, cutting:
   Masking film or paper
   Wrapping, stretch and shrink film
- Tapes Cardboard up to 2-ply
- Sticker and labels

### Benefits

- Highest level of safety occupational safety
  Multifunction: Scraping, scratching, cutting
  Suitable for right and left handers
  Very ergonomic and comfortable to use

## Application advice

- The perfect cutting angle is 45°
  We recommend to fix f.e. masking film
- we recommend to fix the masking in with the free hand, while cutting
   Fixed blade, no exchange necessary

ArtNo.	Specification	SP	MOQ
158.212	black / 148 × 11 × 37,2 mm	1	10

### Description

- = Multifunctional opener for putty and filler cans
- Hexagon recess (10 mm wrench)
   Mandrel

- Manufer
  Engraved ruler
  Bottle opener
  Dimensions: 13.2 cm
- Material: Stainless steel

## Area of application

- Opening of putty and filler cans, bottles and
- machine-locked clamping rings Venting cans and canisters
- Screw connection (10 mm wrench)0

ArtNo.	Specification	SP	MOQ
158.209	stainless steel / 13.2 cm	1	1





# Quickfinder

## 1

1K Easy Filler	118
1K Easy Primer	117
1K Epoxy Primer	117
1K NC Filler	072

## 2

2K Carbo Clear Plus	102
2K Clear VOC CC.19 AS	101
2K Clear VOC 420	100
2K Clear VOC HS-SR	
2K Clear VOC Matt	101
2K Clear VOC Premium	
2K Clear VOC Speed Plus	
2K Epoxy Grundierfüller	114
2K Filler Air Plus	105
2K Filler Vario Plus	105
2K Filler Wet on Wet Plus	106
2K High-Speed Klarlack	114
2K VOC Filler 540	104

## Α

Acryl Thinner	107
Activator	107
AF.211K Filler	104
AF.21 X-pert	103
Air hose	126
Alu Spezial	
Aluminium mesh	076
Anti Rust Putty	
Applicator	153
ASAP Thick Nitril PF	182
Auto Mask	

## в

Bite	
Black Tape	
Blacky	079
Blow off gun	
Blow off stick	
Booth Mask	112
Booth Mask Stick	113
Booth Mask White	112
BPO Hardener	071
Brush Set	125
Bumper Paint Spray	123
Bumper Paint	123
Bumper Structurant Spray	

## С

C-Wax C-80	
Car Clean Double Blue	
Car Clean Double White	
Car Clean Multi Box	
Car Clean Multi Extreme Box	
Car Clean Multi	169
Car Clean Triple Blue	
Car Clean Trolley	
Car Mop white	
Car Mop yellow	
Car Pad black	
Car Polish Roll	147
Carbo 2 Perfect	180
Carbo Putty	
Carbo Spray	
Carbo Spray Thinner	070
CC.20 X-pert	
CC.21 X-press FIVE	
Chamois	
Classicline Soft Pad	015
Clear Coat Spray	122
Cleaning wipes	171
Cockpit-Spray	172
Coding Caps	173
Color Match Card Paper	124
Colour Match Lamp	190
Control-Spray	049
Coverall Black Suit	
_	
D	

Dispenser for 5 kg Polish.

Dispenser for paint strainers ....

..138

. 111

#### Dispenser Multi-Mix... .109 Dispenser (Putty dispenser). ..077 Dispenser bottle incl. Cap... ..138 Disposable protective coverall. ..179 Dry Coat-orange. .048 ..048 Dry Coat-black... .076 Dualmatic.. Dust Keeper. .. 113 . Dust Needle ..125

E	
Easy Clean Box	079
Easy Mask	
EF.21 EP-Filler	103
Elastic Additive	106
Elastic beige	064
Elastic Green	060
Elastic weiss	064
Etch Primer	119
Excenter Back Pad Multi M	043
Excenter Back Pad T.19	043
Excenter Classic	042

-	
F	
Faser	
Fine putty	
Felgo Tape	
Fill	061
Fine Block	033
Fine Line Tape Blue	
Finish Back Pad	139
Finish Clay	
Finish Foam Black AH	
Finish Foam orange	
Finish Foam White AH	
Finish Control Foam C-99	
Finish Quadra Pad C10	
Finish Sander Back Pad	
Finish Sander RC 9332	
Finish Sandwich Pad C30	
Finish Waffle Foam Black AH	
Finish Waffle Pad orange	
Flex	
Floor Mats	
Foam Tape	
Foam Tape T-Soft	
Fill putty	074

## G

Glas	066
Glas White	066
Glass fibre fabric	075
Glass fibre mat	075
Glass fibre fleece	076
Glass fibre reinforced putty	075
Gun Clean Set	172

## н

H <sub>2</sub> O Cleaner	167
Hand Cleaner extreme	185
Hand Cleaner	184
Hand Mask	
Hi Temp	
High Gloss Additive	107
HpP Primer	116
HS-Acryl Tape	156

1	
Interface Pad	043
ISO-VE 7030	167

#### J Japanese Putty Knife ..079

К	
KS-100	157
KS-1000	158
KS-1050	160
KS-200	157
KS-2100	158

KS-250	159
KS-300	157
KS-3000 Plus	158
KS-400	
KS-4000	159
KS-50	156
KS-500	157
KS-550	
KS-800	
KS-850	
KS-Brush	
KS-Dual Gun	159
KS-Gun	159

## L

Lambswool Pad gold S	
Lammfell White S Edge	
Lammfell White S	
Latex Hand I Premium	
Latex gloves	
LED Lamp	
Liquid Masking	
Liquid Putty	

## М

IVI	
Magnet for LED Lamps	189
Magnetic Flat Strip	192
Magnetic Gun Holder	125
Magnetic Sanding Protection	192
Masking film blue	
Masking film yellow	
Masking film green	
Masking Paper Master	
Masking Paper Top II	
Master Tape Green	
Master Tape II	
Metallic	
Micro Tip	
Micro fiber cloth	
Mini Back Pad	
Mini Sanding Discs Grip	
Mini Sanding Machine RC 9330	042
Mini Infrared Thermometer	
Mixing Stick Alu	
Mixing Stick Black	
MMIR Knife Premium	
MMIR Trolley "Box"	
MMIR Trolley	
MMIR-Mask Agua Tec	
MMIR-Mask Light Green	
Mount Tape	
MS Air Gun	
MS Coupling	
Multi Blue Changer	
Multi Green Glas Light	
Multi Green Glas	
Multi Green Changer	
Multi Green Plus 1.0 Super Light	058
Multi Green	
Multi Green Rapid	
Multi Green SF	
Multi Light	
Multi Mix Lids	
Multi Plus	
Multi	
Multi Silver Light	
Multi Soft	
Multi Strain	
Multi Super Flex	
Multi-Mix Bucket	
Multi-Mix Cup	

## Ν

Nano Carnauba Wax	136
Nano Easy Cleaner	173
Neopren Hand	183
Nipple for quick connector	127
Nipple with inner thread	127
Nipple with outer thread	127
Nitril Hand Premium black	182

Opener for putty and filler cans	
Р	RUPES Back Pad
	PLIDES Carrier
Pad Saver	
Paint Arrestor	BUPES Orbital San
Paint Overall blue	BUPES Ibrid Nano
Paint Planer	BUPES Ibrid Nano (
Paint System CPS	BUPES Compact V
Paint Trolley Flexi Plus	RIPES Mini Rando
Paint Trolley	
Paper Trolley 1500	
Paper Trolley	195 BLIPES Polishing M
PG-FG Feinfilter	IZO BLIPES Polishing M
Plastic Can Empty	
Plastic Cleaner	BUPES Orbital Sinc
Plastic Primer	BLIPES Cleaning an
Plastic Pro	
Plastic spreader	
Finish Back Pad M-14	
Polish C-05 cut	
Polish C-07 cut	
Polish C-10 strong	I33 BLIPES Bandom Or
Polish C-30 finish	
Polish Foam Green	
Polish Foam White SC	
Polish Foam Yellow	
Polish Waffle Foam Yellow	
Polishing Back Pad	
Polishing Machine RC 166	
Polish – coarse step 1	
Polish – fine step 2	
Polyester Repair Resin	
Polyester Repair Set	
Power Mix	
Power Mix Film	
Power Mix Gun	
Power Mix Primer	163 S.21Zinc-Spray
Power Mixer (25 ml, 50 ml)	161 Safety Lens
Prefill-Spray	
Prefill-Spray Water	
Prep & Scuff	019 Sanding Block 198
Prep Hand Cut II	
Prep Hand II	
Prep Hand III	-
Prep - Brush	019 Sanding Block Disc
Primer Spray	119 Sanding Block Grip
Primer Surfacing Spray	119 Sanding Block Har
Protective Film SPF	
PROFLEX Back Pad PSA	
ProFLEX Interface Pads	
ProFlex Jupiter	
PROFLEX Jupiter Soft H <sub>2</sub> O	
ProFLEX Jupiter H2O	
PROFLEX Jupiter Soft	
ProFLEX Mercury	
PROFLEX Mercury Sanding Block	
PROFLEX Neptune	
PROFLEX Neptune Pad	
PROFLEX Neptune Pad MaxGrip	
ProFLEX Neptune Soft	
ProFLEX Pluto	
PROFLEX Pluto Sanding Block	
ProFlex Saturn	
Pump Spray	
Pump for Hand Cleaner 3 I	
Putty Board	
Putty Knife	
Putty Mix Board	
	Sound Deadening
R	Speedmixer 10 kg.
	Spoodmiyor 3 kg
Rallye-Spray gloss	
Rallye-Spray matt	
Rallye-Spray Premium gloss	
Rallye-Spray Premium matt	121
	Spray Plus

#### Spray Plus .... Refinish1. .136 Spray .. Refinish Restorer .136 Spray Thinner .... Replacement Spray Head. . 119

The information is intended as aguide to application and is based on current information. The information is offered in good faith and without guarantee or liability. Product specifications subject to change availability. ©VOSSCHEMIE

# Quickfinder

k FFP2 with valve	177
k FFP3 with valve	177
eplacement carbon brush	139
ad	036
	041
n Orbital Sander ER	
Sander RE21ALN	038
.no	040
ino Q-MAQ	
ct Vacuum Cleaner SV10E	041
ndom Orbital Sander LD30	039
g Machine LH19E	140
olishing Machine LH76P	141
g Machine LHR15	
g Machine LHR75	
g Machine LHR75E	141
Single-Hand Sander RA75	
g and maintenance oil	192
Sander SL42AES	037
Sander SLP41A	
E RX	035
III RH	035
n Cleaner S145	041
n Orbital Sander TA50	039
n Orbital Sander TA6A	036
er BigFoot	138
op Carrier KC28	041
olishing Machine LH16ES	140

oat	122
	116
peed Clear Coat	114
el	
ner	
er	
/	
	178
rio	178
198 Grip	046
198 Kit	
400 Grip Flex	046
400 Grip	046
Box Grip	047
Disc Kit 150	
Grip	046
Hard	
Soft	
19	009
19 Finish	
19 Soft	011
19	
P.19	
e V.19	.016,017
SW20	
SW20	
SW20	025 172 093
SW20	025 172 093 127
SW20	025 172 093 127 196
SW20	025 025 093 127 126 166
SW20 g 	025 172 093 127 196 166 166
9 V.19 SW20 J ver Mild ver Spray ver Water	025 093 127 196 166 166 166
SW20 g ver Mild ver Spray ver Water	025 
SW20	025 
SW20 g rer Mild rer Spray rer Water	025 
SW20 g  rer Mild rer Spray rer Water n	025 172 093 127 196 166 166 166 166 
SW20 g rer Mild rer Spray rer Water n Pad	
SW20 g er Mild er Spray er Water n  'ad	025 172 093 127 196 166 166 166 089 122 088 088 088 044 061
SW20 g rer Mild rer Spray rer Water n  'ad ing Panels	025 172 093 127 196 166 166 166 089 122 088 088 088 088 088 044 061 163
SW20 g rer Mild rer Spray rer Water n n Pad kg	025 172 093 127 196 166 166 166 089 122 088 088 088 088 088 088 088 088 088 0
SW20 g rer Mild rer Water n pad kg g	025 172 093 127 196 166 166 166 166 089 089 122 088 088 088 044 061 163 078
SW20	025 172 093 127 196 166 166 166 089 122 088 088 088 088 088 044 061 163 078 077 107
SW20	025 172 093 127 196 166 166 166 089 122 088 088 044 061 163 077 077 107 
SW20 g rer Mild rer Spray rer Water n Pad  rg Panels kg cg s Metall	025 172 093 127 196 166 166 166 089 122 088 088 044 061 163 078 077 077 107 115 124
SW20	025 172 093 127 196 166 166 166 089 122 088 088 088 044 061 163 078 077 107 107 115 124 
SW20 g rer Mild rer Water n pad kg g	025 172 093 127 196 166 166 166 166 166 089 089 088 088 044 061 163 078 077 107 107 115 124 071

Spray Filler Spray	120
Spray Head	124
Squeezer	172
Star Dust P2	177
Star Mask	176
Star Mask Disc	177
Star Mask Pre P2 R	
Star Mask Refill	
Steel Bond	163
Staub Stop	
Staub Stop Super Wave	167
Staub Stop Water Black	168
Staub Stop Water	
Steel	
Steering Wheel Covers	
Stripping Disc	
Super Nitril Hand I	183

Т

Tape Off Disc Premium	049
Tape Off Tool	049
Tec Line Matt Matting Mousse	019
Tec Line Mattflex Pad	018
Tec Line Mattflex Premium	018
Tec Line N20	012
Tec Line Pro Finish	013
Tec Line Softflex	013
Tec Line Stick	
Thermo-Spray	121
Tinting paste filler	106
Тор	072
Тор Таре	
Topline Soft Pad	
Topline WP A	014
Topline WP S	014
Touch Up	124
Tripod for LED Lamps	189

U

UNIFLEX Adapter Nozzle	154
UNIFLEX Air Gun	154
UNIFLEX Glas Fast-Cleaner	153
UNIFLEX Glas Fast-Primer	153
UNIFLEX Glas HM	152
UNIFLEX Glas	152
UNIFLEX Gun	155
UNIFLEX MS	152
UNIFLEX PU	152
UNIFLEX Nozzle	153
UV Brille	178
UV Clear	102
UV Filler Spray	102
UV LED Lamp XL	
UV Gun Cleaner	166
UV Smart Lamp	188
UV Timer	189

## w

Wall dispenser for Soft Bottle 21	185
Wall Bracket	
Wall Bracket for 5 kg Polish	138
Wax Puck	147
Work shop seat	
Work shop bucket	
Wheel Cover	
WM Klebeband	
WR-Lifting Tape	
WR-Lifting Tape Premium	
X	
X-Stand Classic	193
X-Stand Top	
Z	
Zinc Spray	120




## For more information visit us on: www.carsystem.org



Phone: +49 (0) 41 22 / 717 - 0 Fax: +49 (0) 41 22 / 717 - 193 info@carsystem.org

